


SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS


SQUARE NICKEL BRONZE TOP

12 1/2" (320) TOP - MEDIUM, DEEP & EXTRA DEEP RECEPTORS

Conforms to ASME A112.6.7/CSA B79.7

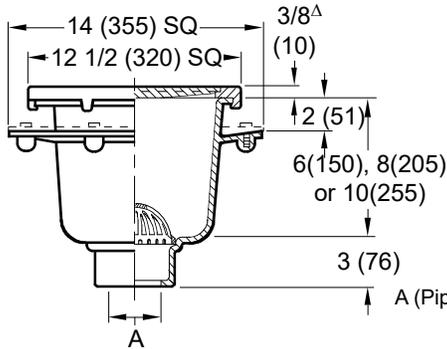

Free Area
42 SQ IN
(271) SQ CM

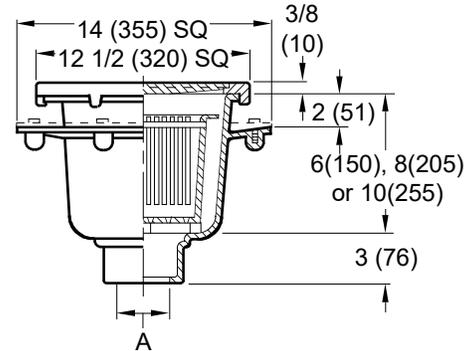

WITH DOME BOTTOM STRAINER

WITH SEDIMENT BUCKET

- | | | | | |
|--|--------------|--------------|---------------|--|
| Fig. ... <input type="checkbox"/> 3140C ... <input type="checkbox"/> 3140Y | 6"(150) deep | 8"(205) deep | 10"(255) deep | CAULK OUTLET |
| Fig. ... <input type="checkbox"/> 3150C ... <input type="checkbox"/> 3150Y | | | | Fig. ... <input type="checkbox"/> 3141C ... <input type="checkbox"/> 3141Y |
| Fig. ... <input type="checkbox"/> 3160C ... <input type="checkbox"/> 3160Y | | | | Fig. ... <input type="checkbox"/> 3151C ... <input type="checkbox"/> 3151Y |
| | | | | Fig. ... <input type="checkbox"/> 3161C ... <input type="checkbox"/> 3161Y |

FEATURES, OPTIONS & ORDERING INFORMATION

REGULARLY FURNISHED: Cast Iron Flanged Receptor with Seepage Holes, Acid Resistant Coated Interior, Nickel Bronze Rim and Secured ADA Grate. Aluminum Dome Bottom Strainer or White ABS Sediment Bucket as Indicated by Figure Number.

OPTIONAL MATERIALS:

- All Duco Cast Iron Receptor -CI
- All Galvanized Receptor -G

VARIATIONS:

- Aluminum Flat Bottom Strainer -FBS
- Flashing Clamp -C
- Less Flange (Fig. 3155, 3156 with caulk outlet only)
- Polished Aluminum Dome Bottom Strainer -PDBS
- Vandal Proof Screws -U
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- S.S. Mesh Lined Bucket -BS
- Drain Installation Device -DID
- Ported Sediment Bucket -SBP

SUFFIX NUMBER

SQUARE RIM

SUFFIX NUMBER	DESCRIPTION
<input type="checkbox"/> -10	Less NB Rim and Grate
<input type="checkbox"/> -11	Less Grate w/NB Rim
<input type="checkbox"/> -12	With NB Rim and 1/2 Grate
<input type="checkbox"/> -13	With NB Rim and 3/4 Grate
<input type="checkbox"/> -14	With NB Rim and Grate with 2 1/2"(64) SQ Center Hole
<input type="checkbox"/> -15	With NB Rim and Aluminum Recessed Grate
<input type="checkbox"/> -19	With NB Rim and Hinged ADA Grate
<input type="checkbox"/> -21	With NB Rim and Grate with 4"(100) DIA NB Funnel
<input type="checkbox"/> -22	With NB Rim and Grate with 6"(150) DIA NB Funnel
<input type="checkbox"/> -25	With NB Rim and Grate with 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval NB Funnel
<input type="checkbox"/> -26	With NB Rim and Grate with 6(150) x 2 1/2(64) x 1"(25) High Oval NB Funnel
<input type="checkbox"/> -41	With NB Rim and Solid Cover
<input type="checkbox"/> -42	With NB Rim and 1/2 Solid Cover
<input type="checkbox"/> -43	With NB Rim and 3/4 Solid Cover
<input type="checkbox"/> -44	With NB Rim and Solid Cover with 2 1/2"(64) DIA Center Hole
<input type="checkbox"/> -49	With NB Rim and Stainless Steel Grate

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S3140
SIZE A
SCALE: NONE
DATE: 9-19-85
APPROVED BY: SJM
CHECKED BY: JD
DRAWN BY: PJ
FIGURE NUMBER 3140-3161 Series

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3140-3161 Series
		10-18-24 7-25-24 4-19-24 2-21-24	HS HS HS HS	CL KV BW CL			
		Revised Square Rim Opts. Revised Optional Materials Added ASME Note Revised Variations					