


ROOF-CEPTOR® INDIRECT WASTE DRAINS

10 1/2" (265) TOP - MEDIUM DEPTH RECEPTORS

Conforms to ASME A112.6.7/CSA B79.7

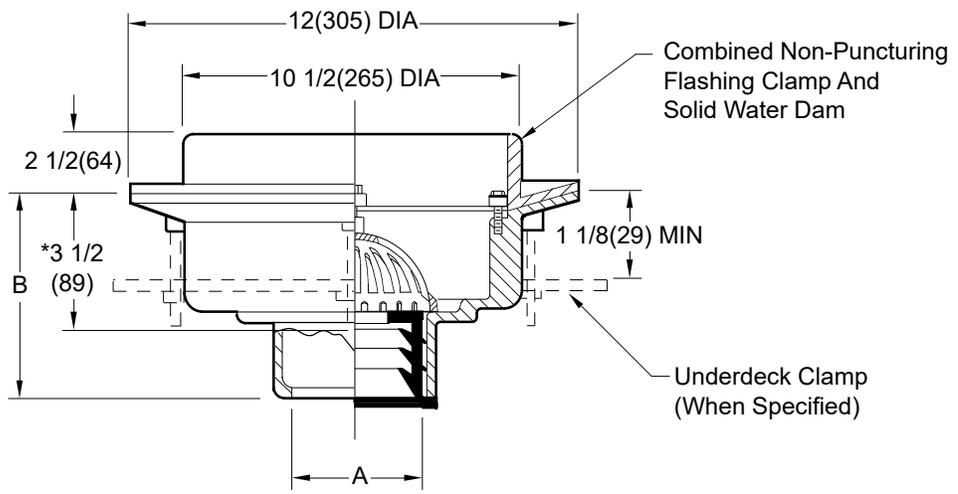

- Fig. 3970C . . . CAULK OUTLET
- Fig. 3970Y . . . NO-HUB OUTLET
- Fig. 3970T . . . THREADED OUTLET

*This Dimension to Internal Stop of Speedi-Set® Gasket

recommended deck openings:
 with suffix -R - 13"(330)
 less suffix -R - 11"(280)

A SIZE	02 (50)	03 (75)	04 (100)	05 (125)	06 (150)
B	6(150) for Caulk, NO-HUB and Speedi-Set®.				
	4 3/4(120) for Threaded				

REGULARLY FURNISHED:
 Duco Cast Iron Receptor with Solid Water Dam and Secured Cast Iron Dome Bottom Strainer.

- VARIATIONS:**
- Extension -E
 - L Speedi-Set® Service Weight
02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy
02(50), 03(75) & 04"(100) sizes only
 - Roof Sump Receiver -R
 - Underdeck Clamp-UDC
 - Roof Deck Plate - RDP

OPTIONAL MATERIALS:
 All Galvanized -G

DRAWING NUMBER **S3970**
 SIZE **A**
 SCALE: **NONE**
 DATE: **9-19-85**
 APPROVED BY: **SJM**
 CHECKED BY: **JD**
 DRAWN BY: **PJ**
 FIGURE NUMBER **3970**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3970