


ROOF DRAINS

FOR INSULATED "BUILT-UP" MEMBRANE ROOFS

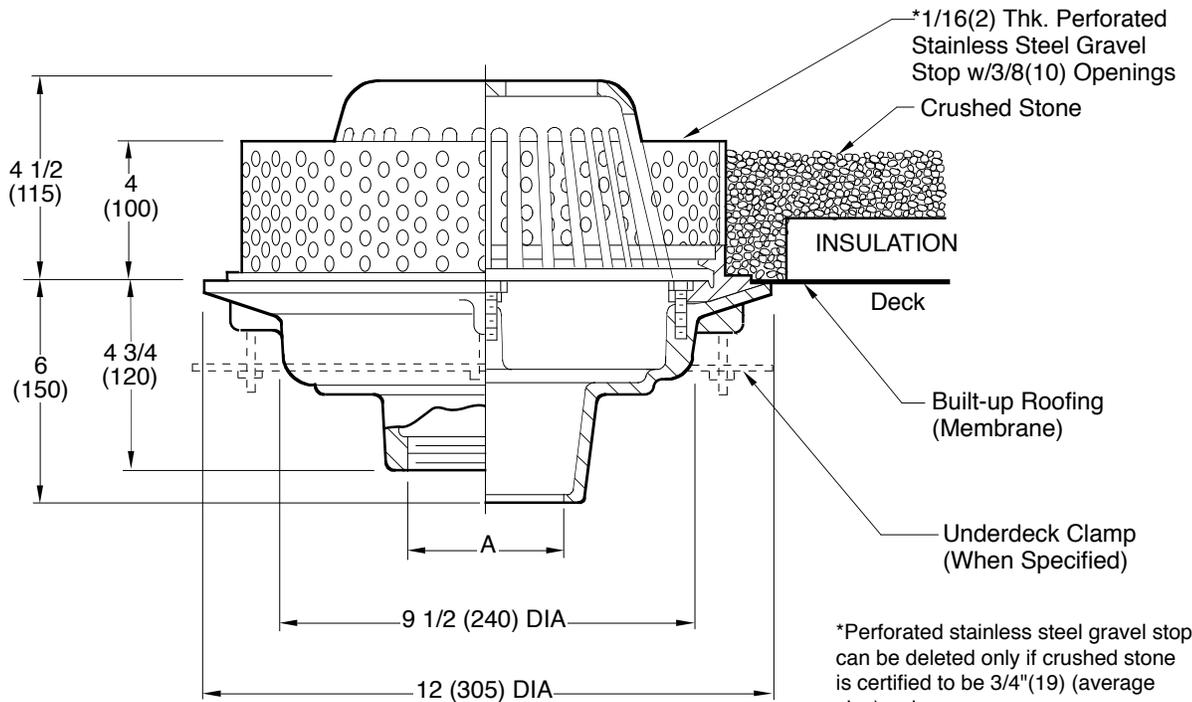

*1/16(2) Thk. Perforated Stainless Steel Gravel Stop w/3/8(10) Openings
 Crushed Stone
 INSULATION
 Deck
 Built-up Roofing (Membrane)
 Underdeck Clamp (When Specified)

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 1311C CAULK OUTLET
 Fig. 1311T THREADED OUTLET

recommended deck opening	
with suffix -R	13(330) DIA
less suffix -R	11(280) DIA

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Clamp, 1/16"(2) Thick, 4"(100) High Stainless Steel Perforated Gravel Stop with 3/8"(10) Dia. Openings and Polyethylene Dome.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- Higher Gravel Stop -HGS (Specify Height)
- Y NO-HUB
- L Speedi-Set® Service Weight 02(50), 03(80) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy 02(50), 03(80) & 04"(100) sizes only
- Sump Receiver -R
- Underdeck Clamp -C

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron -G
- Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S1311
 SIZE A
 SCALE: NONE
 DATE: 2-1-82
 APPROVED BY: KG
 CHECKED BY: JM
 DRAWN BY: KG
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

1311

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
G	3-8-23	Added @ to "Speedi-Set"	KK	CL			1311
F	7-30-19	Removed NOTE	MW	CL			
E	11-13-15	Added Flow Rate Note	TBW	BW			
D	5-9-96	Submittal Update	EMB	BS			