


FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP WITH PUSH-ON SPEEDI-SET® OUTLET

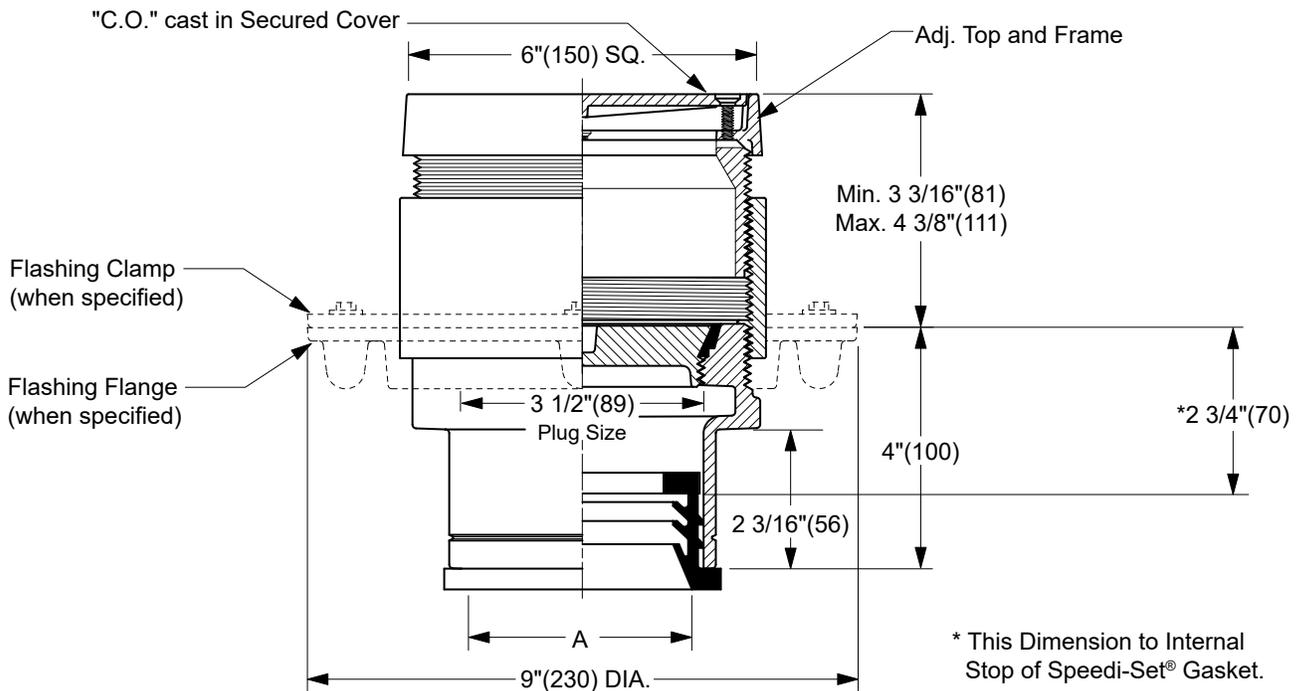

TWIS-TO-FLOOR® ADJUSTMENT

SPEEDI-SET® OUTLET ▲

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4051L.....Gasket Seal - ABS Plug
- Fig. 4052L.....Gasket Seal - Bronze Plug
- Fig. 4053L.....Taper Thread - Bronze Plug
- Fig. 4054L.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Square Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

▲ Available in Extra Heavy, Service Weight or NO-HUB.

OPTIONAL MATERIALS:


- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER S4051
SIZE A
SCALE: NONE
DATE: 2-16-70
APPROVED BY: JM
CHECKED BY: BH
DRAWN BY: RK
4051 SERIES
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

P N M L	11-21-24 4-11-24 8-11-23 3-14-23	Revised Description Added ASME Note Removed Function Added ® to Speedi-Set	HS HS HS KK	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4051 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			

FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP WITH PUSH-ON SPEEDI-SET® OUTLET

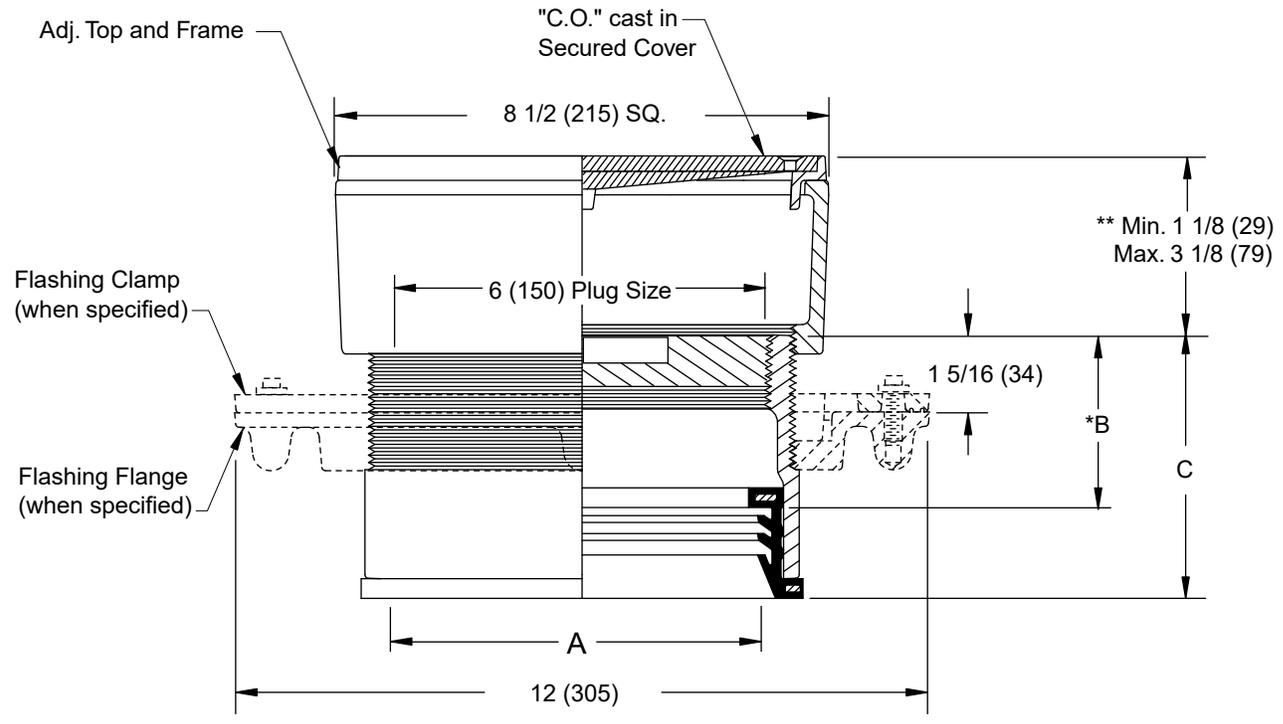

SPEEDI-SET® OUTLET ▲

"A" (Pipe Size) = 06(150) & 08(200)
Conforms to ASME A112.36.2/CSA B79.2

A SIZE	B	C
06(150)	*3(76)	4 9/16(117)
08(200)	*3 1/4(83)	4 13/16(121)

"TWIS-TO-FLOOR®" ADJUSTMENT

SPEEDI-SET® OUTLET▲

Fig. 4053L.....Taper Thread - Bronze Plug

▲ SPEEDI-SET® OUTLET

- L Service Weight - For Service Weight and No Hub Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For Extra Heavy Cast Iron Pipe (Available for all pipe sizes)
- LXH Extra Heavy - For PVC Pipe (Available for 2", 3", 4", and 8" pipe sizes only)
- LPVC Plastic Pipe - For PVC or ABS pipe (Available for 6" pipe size only)
- * This Dimension to Internal Stop of Speedi-Set® Gasket.
- ** When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Square Adjustable Scoriated Secured Nickel Bronze Top.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S4051BS
SIZE: A
SCALE: NONE
DATE: 5-5-06
APPROVED BY: CEL
CHECKED BY: CL
DRAWN BY: RN
FIGURE NUMBER: 4053

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4053
E	11-21-24	Revised Description	HS	CL			
D	4-11-24	Added ASME Note	HS	CL			
C	8-11-23	Removed Function	HS	CL			
B	3-14-23	Added @ to Speedi-Set	KK	CL			