

## Post Hydrant

### MODEL M-175

3/4" FREEZE RESISTANT,  
COMPRESSION-TYPE POST HYDRANT

#### STANDARD FEATURES

Model M-175 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. The spring-loaded handle raises and lowers the internal supply line assembly, controlling the valve. The internal supply column is evacuated through drainage ports in the bottom. The hydrant must be operated fully "on."

#### SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-175. Unit shall be capable of year-round use in freezing weather.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line. Inlet shall have union connection.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be operated by lever handle spring-loaded for closure. Stock, top and base shall be fabricated of heavy, one-piece iron castings finished with a heavy grade of oil-based green enamel. Handle shall be an aluminum-bronze casting.

Inner supply assembly shall incorporate solid-brass castings. All solid-brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casing and inner supply line shall be galvanized-steel pipe, finished with a heavy grade of oil based green enamel.

Nozzle shall be solid brass casting, threaded for 3/4" hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



**Standard Model:** M-175

#### DEPTH OF BURY (additional costs may be incurred)

- |   |   |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm)    | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm)  | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other _____      |

#### OPTIONS (additional costs may be incurred)

- |                                |   |
|--------------------------------|---|
| <input type="checkbox"/> - BFH | Double ball check valve and vacuum breaker* |
| <input type="checkbox"/> - VB  | Vacuum breaker                              |
| <input type="checkbox"/> - LC1 | Locking cover, less padlock*                |
| <input type="checkbox"/> - R01 | Shut off valve with plate*                  |
| <input type="checkbox"/>       | Plain end spout                             |
| <input type="checkbox"/>       | Sewer drain connection                      |

\* See separate option sheets

Certified to the following standards:



Federal Public Law 111-380 (No Lead)




Recyclable Product

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL

**Post Hydrant**  
**MODEL M-175**  
**3/4" FREEZE RESISTANT,**  
**COMPRESSION-TYPE POST HYDRANT**

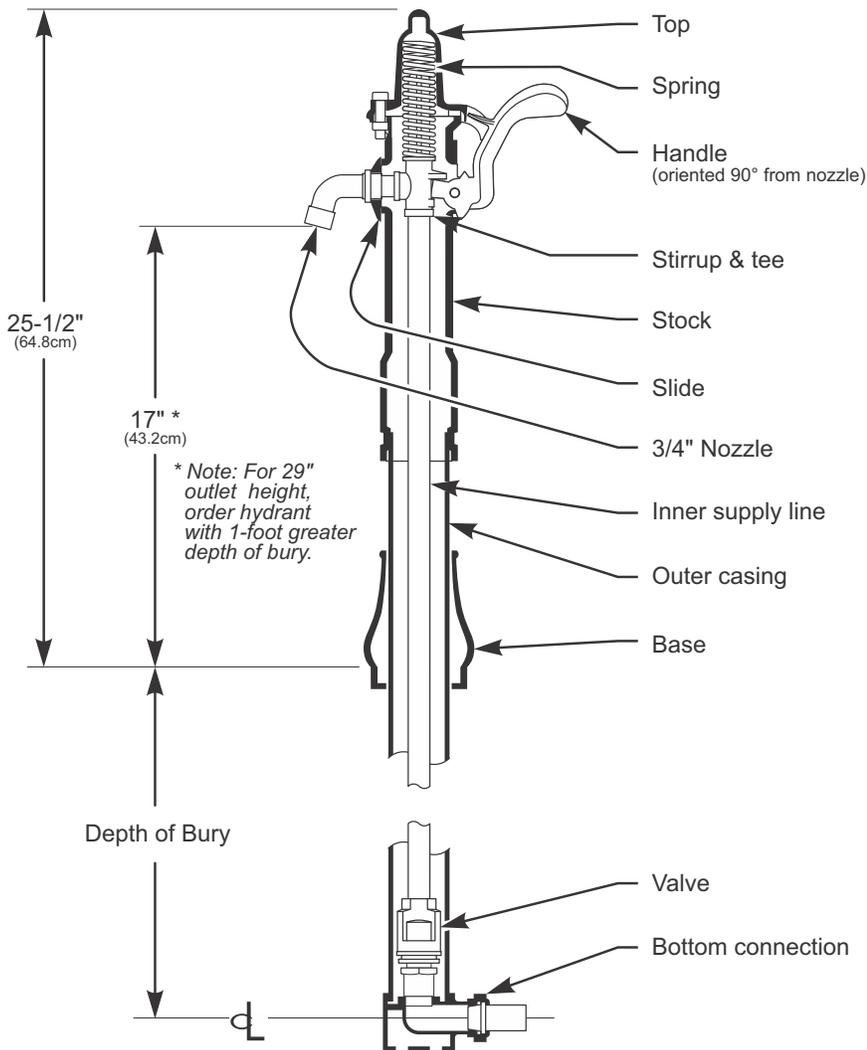

**SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

*All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*