


# PROMENADE DECK DRAIN FOR INSULATED ROOF DECKS

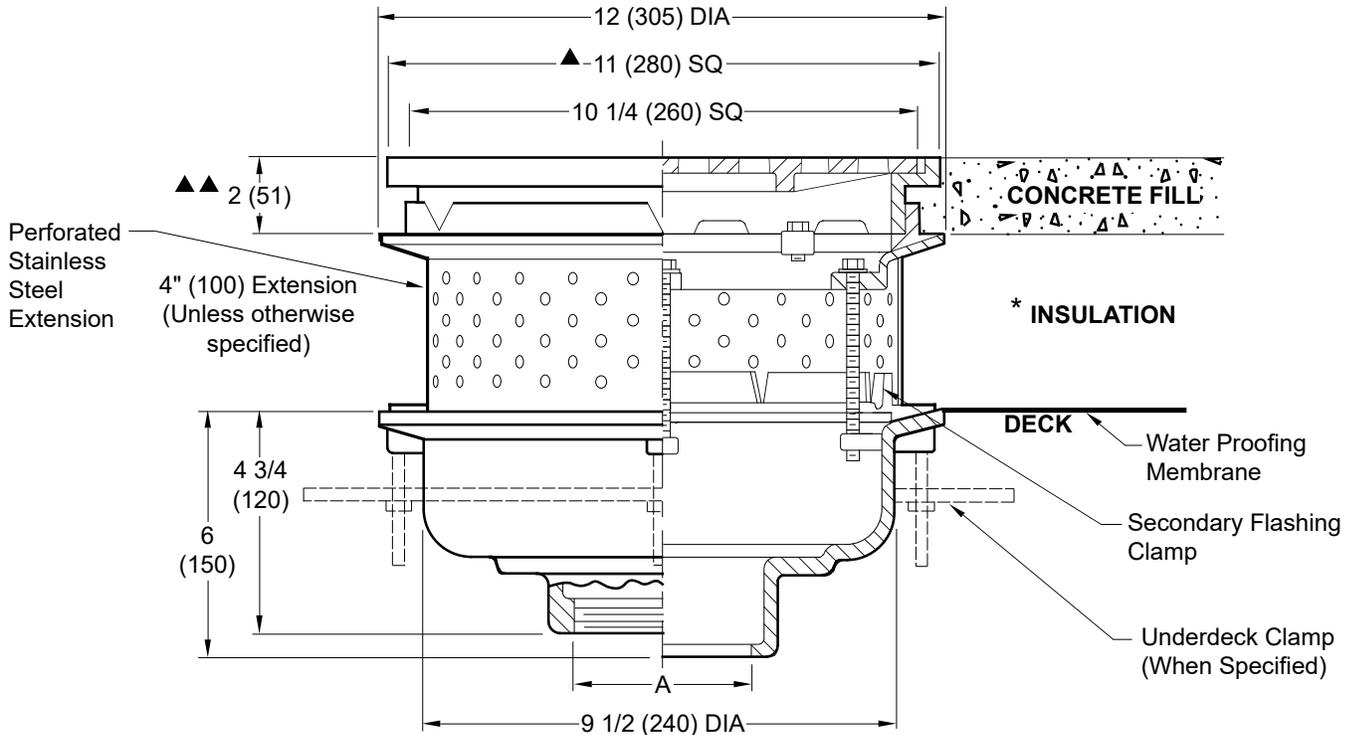

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) & 06(150)

- Fig. 1459C-EPSS . . . . . CAULK OUTLET
- Fig. 1459T-EPSS . . . . . THREADED OUTLET
- Fig. 1459Y-EPSS . . . . . NO-HUB OUTLET

- ▲ Add 1/4"(6) when bronze top is specified.
- ▲▲ Add 1/8"(3) when bronze top is specified.

recommended deck opening	
with suffix -R	13 (330) DIA
less suffix -R	11 (280) DIA

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body and 4" (100) Perforated Stainless Steel Extension with Secondary Flashing Clamp and Secured Square Hole ADA Grate.

**VARIATIONS:**

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set® Service Weight  
02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set® Extra Heavy  
02(50), 03(75) & 04"(100) sizes only
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Grate -U
- Roof Deck Plate -RDP
- Heel Proof Grate -HP

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

\* On some systems this layer includes a layer of pea gravel and a layer of insulation.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
S1459-EPSS

SIZE  
A

SCALE:  
NONE

DATE:  
11/09/04

APPROVED BY:  
AM

CHECKED BY:  
AM

DRAWN BY:  
JJ

FIGURE NUMBER  
**1459-EPSS**

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET
C	4-1-24	Revised Variations, Fig. Opts. Added @ to "Speedi-Set" Updated Reg. Furnished	HS	CL		
B	3-8-23		KK	CL		
A	1-19-23		KK	CL		

**FIGURE NUMBER**  
**1459-EPSS**