


**ROOF DRAINS**

**SPECIAL ROOF APPLICATIONS**

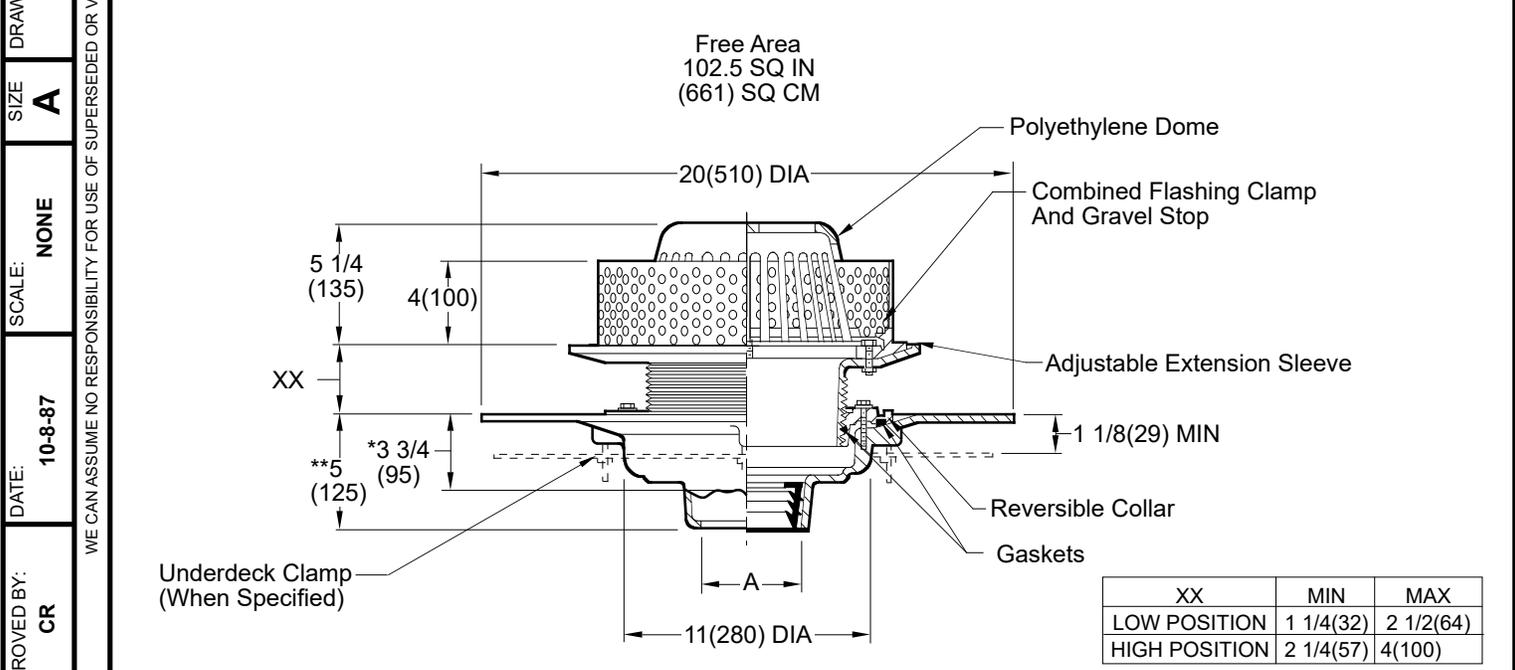

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

\*This dimension to internal stop of Speedi-Set® Gasket  
 \*\*Same for Caulk, NO-HUB and Speedi-Set®, 3 3/4(95) for Threaded

Fig. 1039C . . . . . CAULK OUTLET  
 Fig. 1039Y . . . . . NO-HUB OUTLET

**NOTE:** Recommended deck opening 14 3/4"(375).

- REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Adjustable Extension Sleeve, 1/16"(2) Thick 4"(100) High Stainless Steel Perforated Gravel Guard with 3/8"(10) DIA Openings, Flashing Clamp and Polyethylene Dome.
- VARIATIONS:**  
 Expansion Joint (Specify Fig. 1710)  
 Higher Gravel Stop (Specify) -HGS  
 "L" Shaped Underdeck Clamp -CL  
 L Speedi-Set® Service Weight 02(50), 03(80) & 04"(100) sizes only  
 LXH Speedi-Set® Extra Heavy 02(50), 03(80) & 04"(100) sizes only  
 Underdeck Clamp -C  
 Vandal Proof Dome -U  
 T Threaded Outlet
- OPTIONAL MATERIALS:**  
 ▲  Aluminum Dome -AD  
 ▲  Cast Iron Dome -CID  
 Galvanized Cast Iron -G  
 ▲  Rough Bronze Dome -RBD

**NOTE:** Dimensions shown in parentheses are in millimeters.

▲ **Optional domes' free area are as follows:**  
 Aluminum 98 (632)  
 Cast Iron 80 (516)  
 Bronze 95 (613)

**1039**

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
<b>1039</b>								<b>1039</b>