


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

15" (380) ROUND TOP - HEAVY DUTY DRAIN WITH TRACTOR GRATE

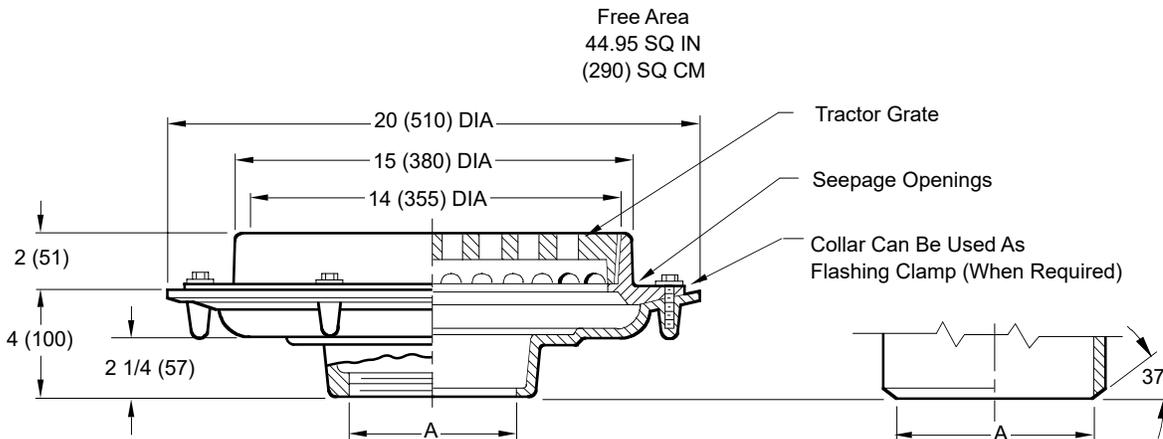

A (Pipe Size) = 04(100), 05(125), 06(150) or 08(205)

Fig. 9733C CAULK OUTLET
 Fig. 9733T THREADED OUTLET

Butt Weld Outlet

Schedule 40 Regularly Furnished

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Flashing Collar with Seepage Openings and Tractor Grate.

VARIATIONS:

- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Satin Finished Top -SF
- 90° Side Outlet (Specify Fig. 9759)
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, -S40 or -S80)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent to Type 316) Stainless Steel -316
- Ductile Iron Grate -M
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S9733

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD

CHECKED BY:
VGD

DRAWN BY:
PJ

9733

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | | | |
|-------------|-----------------|------------------------------|------------|----------------|----------------------|--------------------------|----------------------|
| G | 10-16-24 | Revised Variations | HS | JT | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
| F | 8-28-23 | Removed Function | HS | CL | | | |
| E | 10-17-11 | Added Note | TBW | CL | FIGURE NUMBER | 9733 | |
| D | 01/09/08 | Added 2 1/4 Dimension | JJ | AM | | | |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | | |