




Option SW000-F11

Gooseneck Spout

Deck mount rigid/swivel gooseneck with polished chrome plated brass deck flange and gooseneck, 0.5 GPM non-aerated spray device and 1/2" NPSM male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Faucet is designed for 1-1/8" dia. single hole centered deck punching.

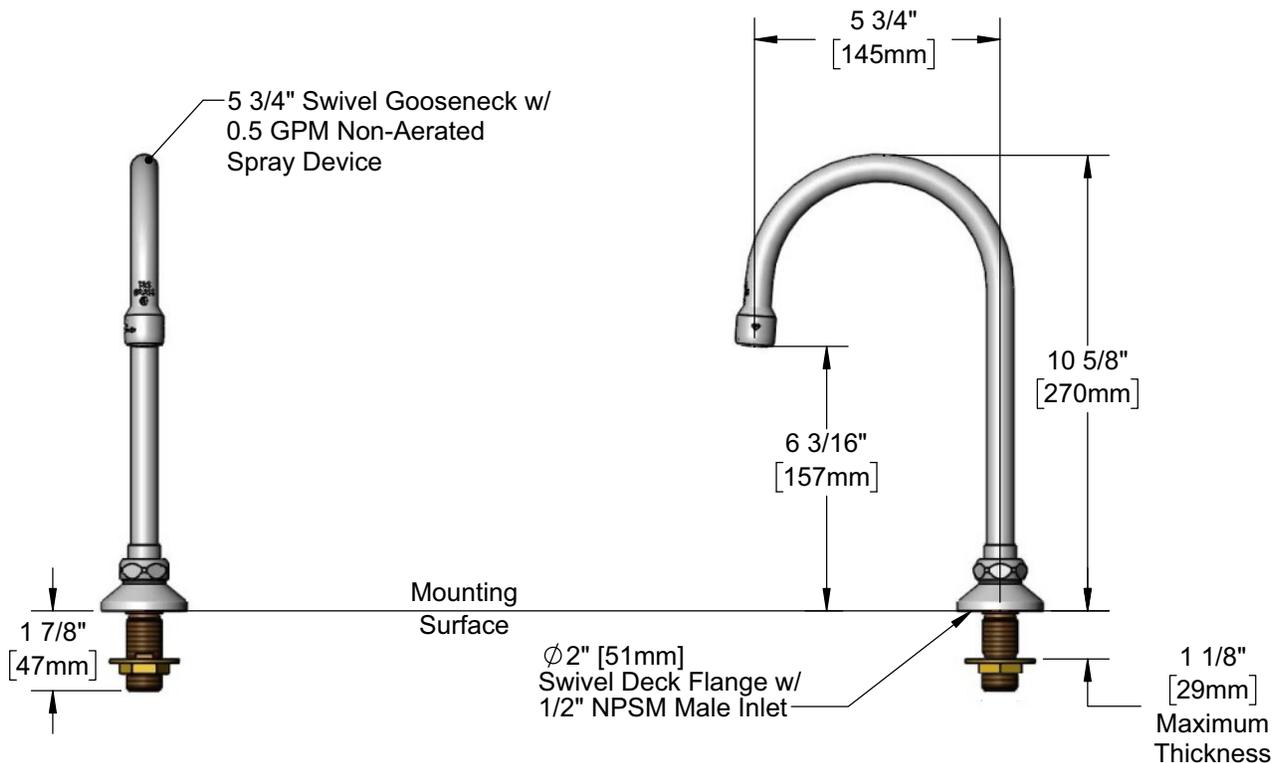

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

