




## Shower-Ware® 110 Series Acme Type 1 Wall Showers

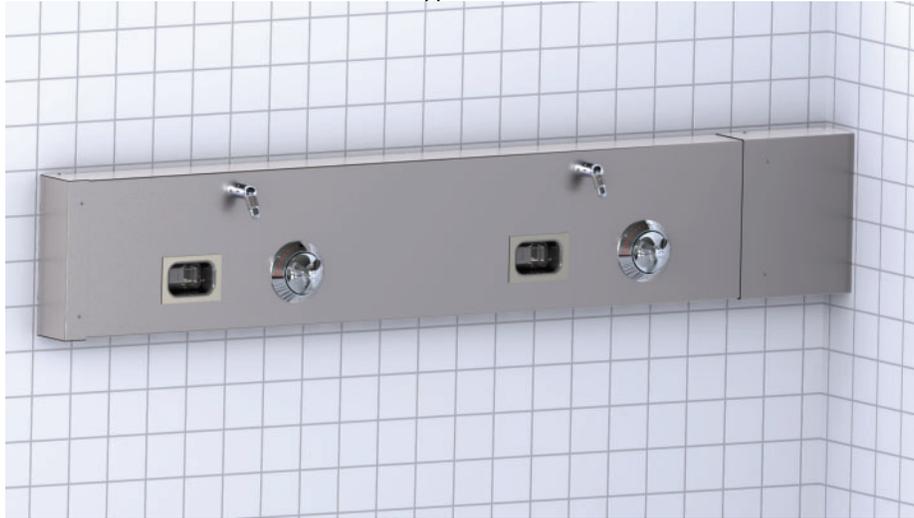

118-W-RD

US PATENTS - US 10,474,170 B2 & US D697,591



CSH-WSA Showerhead is  
EPA WaterSense Certified

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Acme Type 1 Wall Mounted Showers

**Housing** is 16 gage, type 304 stainless steel with satin finish. Shower Modules are no more than 10 feet long for ease of maneuvering through corridors and doors. Cage Nuts permitting plus or minus 1" horizontal adjustment are provided in Housing. Room layout drawings are provided from the factory with each project for customer approval.

**Supply Piping** is type "L" copper Tubing and bronze or wrought copper fittings. Showerhead Riser and Valve supply inlet piping may differ. Supply stub-out is sized to provide adequate water to each Showerhead simultaneously. Piping is hydrostatically tested at 150 PSI.

**Control Valve** type is indicated by selected Acme model number. All Valves have replaceable Cartridges which contain all wearing parts and are serviced from the face of the Shower for easy maintenance. Valve is tamper-resistant with an easy-to-close mechanism and low leverage Handle to protect the operating parts from excessive torque.

**Showerheads** are solid brass, triple chrome-plated and include built-in 1.6 GPM Flow Restrictor. The Acorn Logan Wizard Showerhead design provides self-cleaning with every use and has an adjustable spray pattern from a coarse stream to a fine mist.

**End Caps** and connecting components are heavy gage stainless steel. Each component is pre-punched to accept tamper-resistant fasteners.

**Fasteners.** Acorn furnishes all exposed tamper-resistant fasteners necessary to complete the on-site Shower assembly; however, concealed wall fasteners or Anchor Shields are not furnished.

**IMPORTANT -ROOM LAYOUT REQUIREMENTS:** Factory Generated Project Specific Shower Room Layouts for use as Submittal are required to order product. Contact Sales Representative for complete details.

#### GUIDE SPECIFICATION

Provide and install Acorn Acme Wall Mounted Showers (specify model number and options). Housing and End Caps shall be 16 gage, type 304 stainless steel with satin finish. Showerheads shall be Acorn Logan Wizard with adjustable spray from a coarse stream to a fine mist. Showers shall be pre-piped and hydrostatically factory tested at 150 PSI. Installation shall be made in accordance with manufacturer's recommendations and details.

Page 1

S.110

Revised: 11/17/25

# Shower-Ware®: 110 Acme Type 1 Wall Showers



## Showerhead Discharge Height (Not Part of Model Number)

6'-0"  5'-6"  5'-0"  Other (Specify) \_\_\_\_\_

## MODEL NUMBER AND OPTIONS SELECTION:

### SERIES (Must Specify)

1 Acme

### TYPE (Must Specify)

-1 Wall Showers

### VALVE (Must Specify)

- 0 Electronic Valves, Single-Temp Metering (Specify Type Where Indicated)
- 6 Air-Control, Single Temperature Metering
- 8 T/P Temperature-Pressure Balancing Mixing Valve With Patented Ligature Resistant Tri-Lever Handle (ASSE 1016 Compliant)

### SUPPLY (Must Specify)

- T Top
- W Wall

### ELECTRONIC VALVE SELECTION

#### Master-Trol® (Electronic)

- EVS1 Single Temp
- EVSP1 Single Temp, Piezo Button

#### Master-Trol® PLUS (Electronic)

- MTP1 Single Temp
- MTPP1 Single Temp, Piezo Button

#### Time-Trol® (Electronic)

- MVC1 Single Temp

#### Programmable (Electronic) w/9VDC Plug-In Transformer

- PPZ1 Single Temp Programmable Piezo Button

### VALVE OPTIONS

- CI Cycle Interrupt for Time-Trol Valves (-MVC option only)
- LVR Lever Handle (-8 Valve)
- MV Metering Valve in Riser (Air-Control)
- PBH Hemispherical Pushbutton (-6 Valve)
- TF Transformer, 120VAC to 24VAC (-MVC option only)

### SHOWERHEAD OPTIONS

- CSH Conical Showerhead (Ligature Resistant)
- CSH-WSA WaterSense 1.5 GPM Conical Showerhead (Ligature Resistant)
- F Flow Control
  - 2.0 GPM (Not Available For Use in California)
- FX Handheld Shower With 60" Stainless Steel Hose (In Lieu of Conventional Showerhead)
  - QD Quick-Disconnect
  - PSO-QD w/ Positive Shut-Off
- MSH Multi-Stream Showerhead
- P Penal Showerhead
- Y Universal Ball Joint
- YY Lockable Universal Ball Joint


### PRODUCT OPTIONS

- BS Built-in Liquid Soap System
- D Surface Mounted Soap Dish
- EG Enviro-Glaze, Specify Color: \_\_\_\_\_
- RD Recessed Soap Dish
- SC Supply Cover, Ceiling Height \_\_\_\_\_
- SLPB 30 degree Sloping Housing Bottom
- SLPT 30 degree Sloping Housing Top

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

**NOTE: Refer to Supplemental Submittals for Option details.**

**IMPORTANT:** Factory Generated Project Specific Shower Room Layouts for use as Submittal are required to order product.

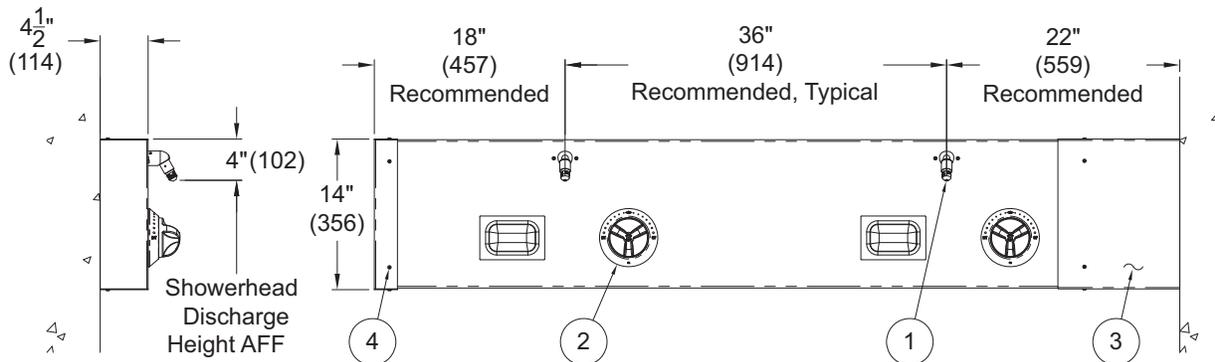

### NOTES:

1. Showerhead
2. T/P Valve w/ Standard Patented Tri-Lever Handle
3. Stainless Steel Overlay
4. Tamper Resistant Fasteners

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. <small>Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</small>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>