


DRAWING NUMBER S1031 (-R-C)
SIZE A
SCALE: NONE
DATE: 9-20-88
APPROVED BY: CR
CHECKED BY: BS
DRAWN BY: EMB
1031 (-R-C)
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
ROOF DRAINS

SPECIAL ROOF APPLICATIONS

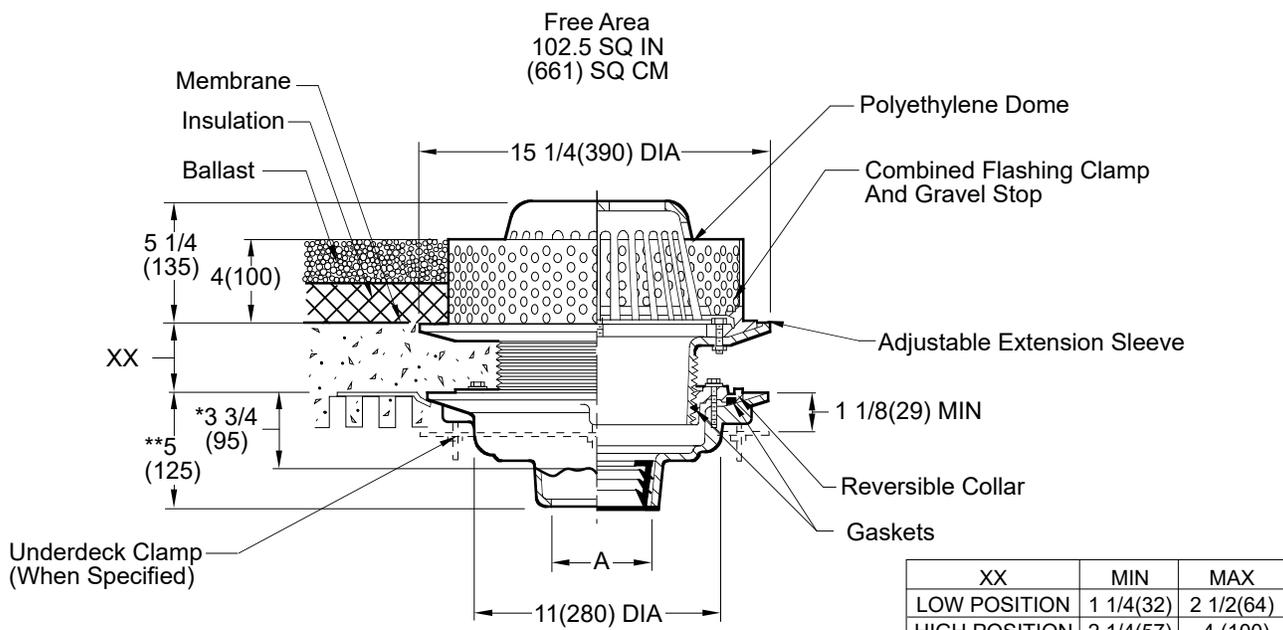

	XX	MIN	MAX
LOW POSITION	1 1/4(32)	2 1/2(64)	
HIGH POSITION	2 1/4(57)	4 (100)	

* This dimension to internal stop of Speedi-Set® Gasket
 **Same for Caulk, NO-HUB and Speedi-Set®, 3 3/4(95) for Threaded
 A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)
 Fig. 1031C (-R-C) CAULK OUTLET
 Fig. 1031Y (-R-C) NO-HUB OUTLET

Recommended Deck Opening

With Suffix -R	17(430) DIA
Less Suffix -R	14(355) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body with Adjustable Extension Sleeve, 1/16"(2) thick 4" (100) high Stainless Steel Perforated Gravel Guard with 3/8"(10) DIA Openings, Flashing Clamp and Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - Higher Gravel Stop (Specify) -HGS
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set® Service Weight 02(50), 03(80) & 04"(100) sizes only
 - LXH Speedi-Set® Extra Heavy 02(50), 03(80) & 04"(100) sizes only
 - Sump Receiver -R
 - Underdeck Clamp -C
 - Vandal Proof Dome -U
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- ▲ Aluminum Dome -AD
 - ▲ Cast Iron Dome -CID
 - ▲ Galvanized Cast Iron -G
 - ▲ Rough Bronze Dome -RBD

▲Optional domes' free area are as follows:
 Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
1031 (-R-C)	G	9-27-23	Removed Function	HS	CL			1031(-R-C)
	T	3-8-23	Added @ to "Speedi-Set"	KK	CL			
	F	7-30-19	Removed NOTE	MW	CL			
	D	9-17-15	Added Flow Rate Note	TBW	CL			