

## Post Hydrant

### MODEL M-200

2" FREEZE RESISTANT,  
COMPRESSION-TYPE  
POST HYDRANT

#### STANDARD FEATURES

Model M-200 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. Turning the handle raises or lowers the internal supply-line assembly, controlling the valve. Hydrant must be operated fully "on." Constructed of heavy brass, premium-quality gray iron and steel, the M-200 is designed for trouble-free reliability and easy maintenance.

#### SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-200. Unit shall be capable of year round use in freezing weather.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be lever-handle operated. Handle shall be fabricated of one piece iron casting finished with a heavy grade of oil-based green enamel. Stock, top, and base shall be fabricated of heavy, one-piece iron castings finished with a heavy grade of oil-based green enamel.

Inner supply assembly shall incorporate solid-brass castings. All solid brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casing shall be black iron pipe, finished with a heavy grade of oil-based green enamel.

Nozzle shall be solid brass casting, threaded for 2" NPSM hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



**Standard Model:** M-200

#### DEPTH OF BURY (additional costs may be incurred)

- |   |   |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm)    | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm)  | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other _____      |

#### OPTIONS (additional costs may be incurred)

- BFH Double ball check valve and vacuum breaker\*
- VB Vacuum breaker
- Wheel handle
- Plain end spout
- 1-1/2" NPSM hose outlet
- 2-1/2" NPSM hose outlet
- 2-1/2" NPT inlet


\* See separate option sheets

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**Post Hydrant**

**MODEL M-200**

**2" FREEZE RESISTANT,  
COMPRESSION-TYPE POST  
HYDRANT**

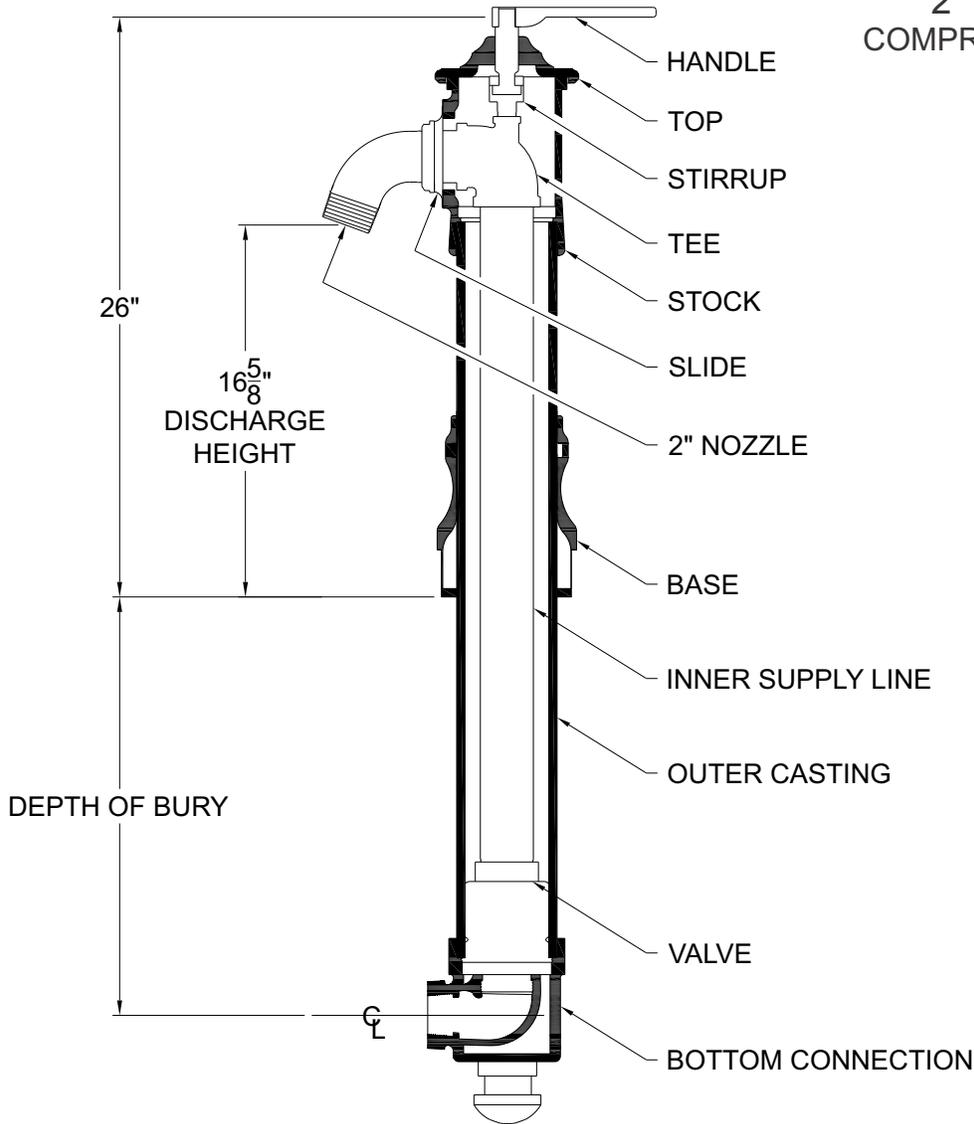

**SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_  
(Approval for Manufacturing)

*All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*