

ROOF ACCESSORY

EXPANSION JOINT

NOTE-USE IN VERTICAL INSTALLATION ONLY

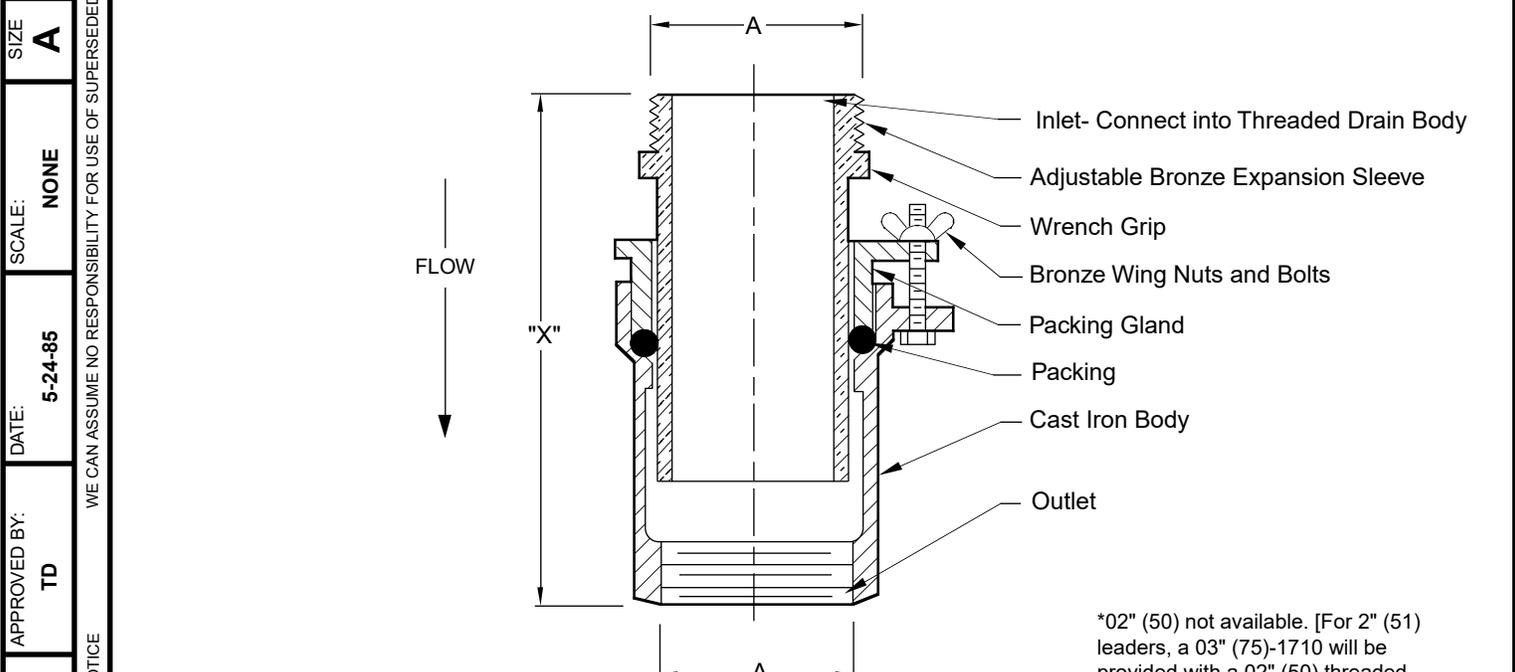


Fig. 1710T THREADED OUTLET

A SIZE	"X"	
	MIN	MAX
02 (50)	7 5/16 (186)	9 3/4 (250)
03 (75)	7 11/16 (195)	9 3/4 (250)
04 (100)	7 11/16 (196)	9 3/4 (250)
05 (125)	8 3/4 (220)	10 5/16 (262)
06 (150)	8 3/8 (213)	10 1/4 (260)
08 (200)	8 5/8 (219)	11 1/16 (281)

*02" (50) not available. [For 2" (51) leaders, a 03" (75)-1710 will be provided with a 02" (50) threaded connection in outlet of cast iron body. This requires using a 03" (75) drain body.]

NOTE: Must be installed in vertical installation only, in an accessible location preferably under the roof drain. Should be installed in an open space where the expansion sleeve can move freely. Never install encased in a slab, in soil or a similar substrate.

NOTE: Dimensions shown in parentheses are in millimeters.

<p>REGULARLY FURNISHED: Duco Cast Iron Body with Adjustable Bronze Expansion Sleeve and Bronze Bolts and Wing Nuts.</p>	<p>VARIATIONS:</p> <p><input type="checkbox"/> Spigot Adaptor -S</p> <p><input type="checkbox"/> NO-HUB Adaptor (Specify Fig. 2646Y)</p>	<p>OPTIONAL MATERIALS:</p> <p><input type="checkbox"/> Galvanized Cast Iron -G</p>
--	---	---

FIGURE NUMBER	1710	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER	1710
REV.	DATE	DESCRIPTION	BY	CKD. BY	

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DRAWING NUMBER **S1710**

SIZE **A**

SCALE: **NONE**

DATE: **5-24-85**

APPROVED BY: **TD**

CHECKED BY: **TD**

DRAWN BY: **CMB**