

# TRAPS

## DEEP SEAL "P" TRAPS

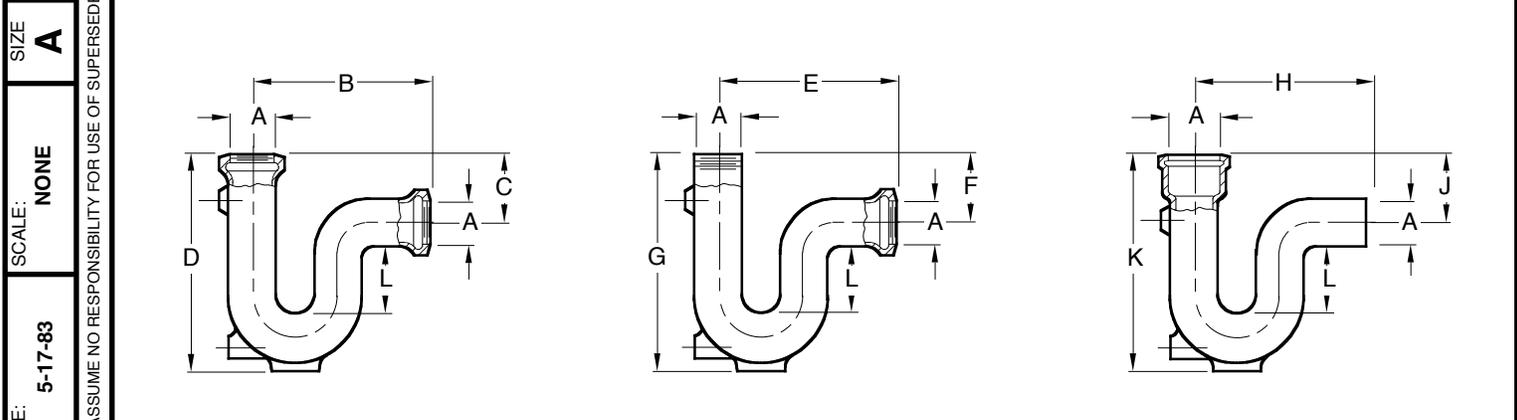


Fig. 7220T . . . FEMALE THREADED INLET AND OUTLET

Fig. 7221T . . . MALE THREADED INLET AND FEMALE THREADED OUTLET

Fig. 7222S . . . HUB INLET AND SPIGOT OUTLET  
Sized for Service Weight

A SIZE	B	C	D	E	F	G	H	J	K	L Seal
02(50)	6 1/4(160)	2 3/4(70)	10(255)	6 1/4(160)	2 3/4(70)	10(255)	10(255)	4(100)	11 1/2(290)	4(100)
03(75)	8(205)	3(76)	13(330)	8(205)	3(76)	13(330)	11 1/2(290)	4 1/2(115)	14 1/2(370)	5(125)
04(100)	9 3/4(250)	4 1/4(110)	15 1/2(395)	9 3/4(250)	6(150)	17 1/2(445)	14 3/4(375)	7(180)	18 1/2(470)	5(125)

**REGULARLY FURNISHED:**  
Ducto Cast Iron Trap.

- VARIATIONS:**
- Bronze Cleanout Plug -BP
  - Flushing Connection 1/2(13) in. N.P.T. -FC
  - NO-HUB Adaptor (Specify Fig. 2646Y)
  - Trap Primer Connection -P050 1/2"(13), -P075 3/4"(19)

- OPTIONAL MATERIALS:**
- A.R. Coated Inside -ARI
  - Galvanized Cast Iron -G

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S7220  
 SIZE: A  
 SCALE: NONE  
 DATE: 5-17-83  
 APPROVED BY: SUM  
 CHECKED BY: DT  
 DRAWN BY: BS  
 FIGURE NUMBER: 7220,7221,7222  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>7220,7221,7222</b>
		Removed Fuction Revised Figure Number Revised Optional Materials Revised Table	HS TBW TBW TBW	CL CL CL BS			