LOCATION

G

DRAWING NUMBER **S4031 (-X)**

SIZE **A**

SCALE: **NONE**

DATE: **04/13/89**

APPROVED BY: **TD**

CHECKED BY: **CR**

DRAWN BY: **EMB**

FIGURE NUMBER **4031 (-X) SERIES**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

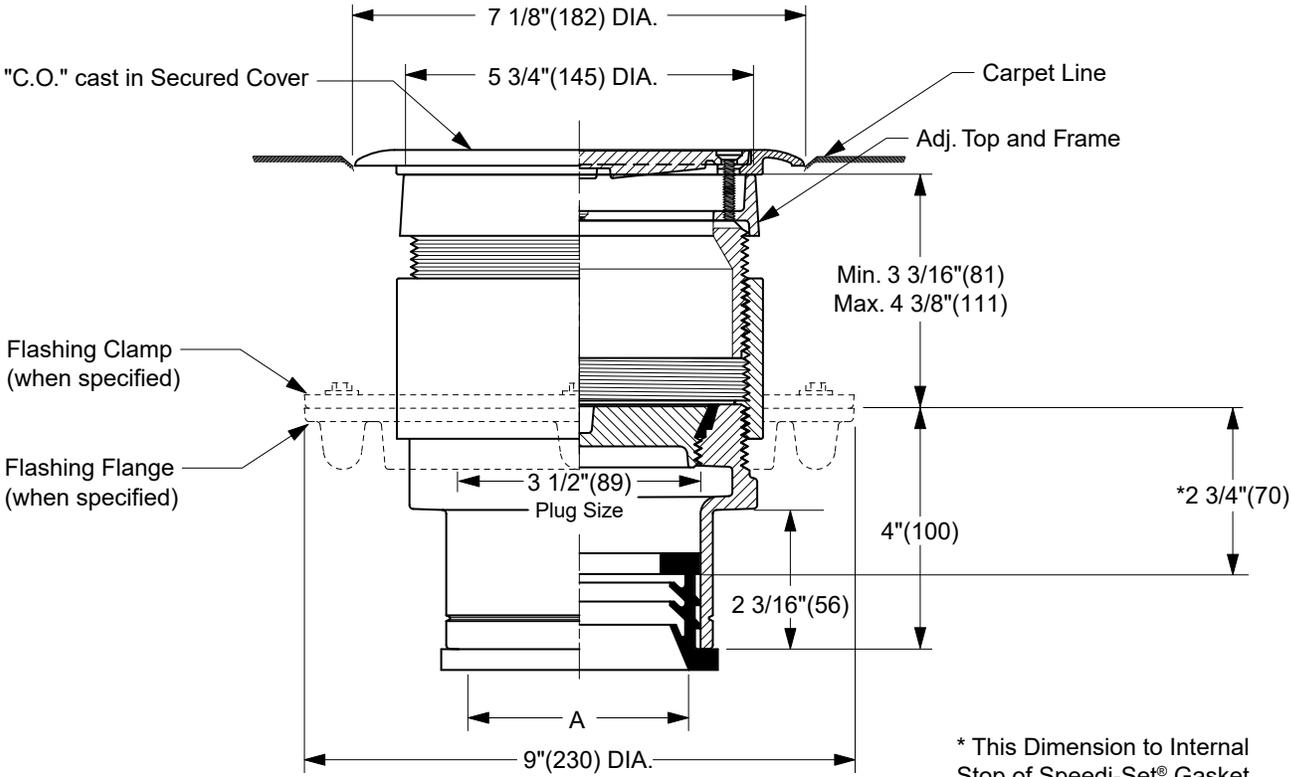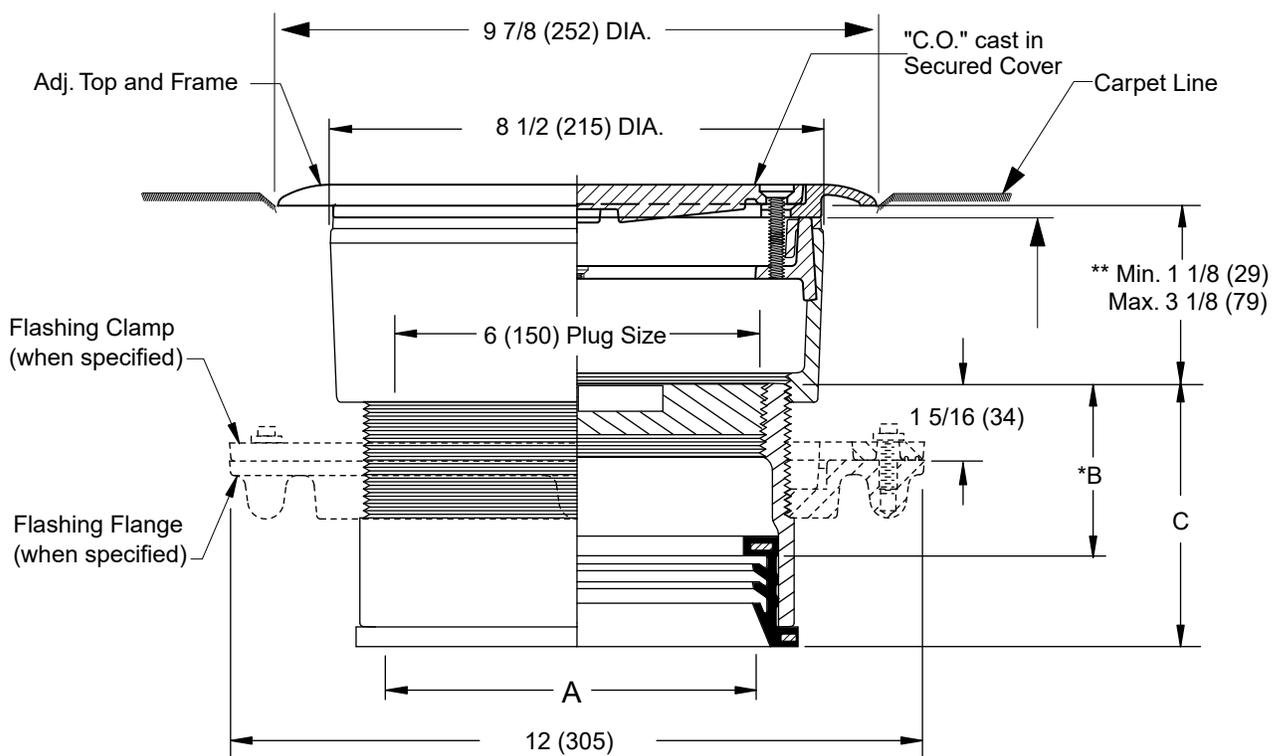DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS AND CARPET CLAMPING FRAME

ROUND NICKEL BRONZE TOP WITH PUSH-ON SPEEDI-SET® OUTLET

7 1/8"(182) DIA.

"C.O." cast in Secured Cover

5 3/4"(145) DIA.

Carpet Line

Adj. Top and Frame

Min. 3 3/16"(81)
Max. 4 3/8"(111)

Flashing Clamp (when specified)

Flashing Flange (when specified)

3 1/2"(89)
Plug Size

*2 3/4"(70)

4"(100)

2 3/16"(56)

A

9"(230) DIA.

TWIS-TO-FLOOR® ADJUSTMENT

SPEEDI-SET® OUTLET ▲

* This Dimension to Internal Stop of Speedi-Set® Gasket.

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Fig. 4031L (-X).....Gasket Seal - ABS Plug
Fig. 4032L (-X).....Gasket Seal - Bronze Plug
Fig. 4033L (-X).....Taper Thread - Bronze Plug
Fig. 4034L (-X).....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

▲ Available in Extra Heavy, Service Weight or NO-HUB.

REGULARLY FURNISHED:
Duco Cast Iron Cleanout with Round Adjustable Scoriated Secured Nickel Bronze Top and Carpet Clamping Frame. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:
Flashing Flange -F
Flange with Flashing Clamp -F-C
Carpet Marker Type -Y
Vandal Proof Top -U
Wide Flange (DX)

OPTIONAL MATERIALS:
Galvanized Cast Iron -G
Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY
G	11-21-24	Revised Description	HS	CL
F	8-11-23	Removed Function	HS	CL
E	3-14-23	Added ® to "Speedi-Set"	KK	CL
D	07/26/02	Corrected Clamp & Flange view	JJ	CL

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		4031 (-X) SERIES

LOCATION

FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOP AND CARPET CLAMPING FRAME

ROUND NICKEL BRONZE TOP WITH PUSH-ON SPEEDI-SET® OUTLET

9 7/8 (252) DIA.

Adj. Top and Frame

"C.O." cast in Secured Cover

Carpet Line

8 1/2 (215) DIA.

** Min. 1 1/8 (29)
Max. 3 1/8 (79)

Flashing Clamp (when specified)

6 (150) Plug Size

1 5/16 (34)

*B

C

Flashing Flange (when specified)

A

12 (305)

SPEEDI-SET® OUTLET ▲
"A" (Pipe Size) = 06(150) & 08(200)

A SIZE	B	C
06(150)	*3(76)	4 9/16(117)
08(200)	*3 1/4(83)	4 13/16(121)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPEEDI-SET® OUTLET ▲

☐ Fig. 4033L (-X)...................Taper Thread - Bronze Plug

▲ **SPEEDI-SET® OUTLET**
-L Service Weight - For Service Weight and No Hub Cast Iron Pipe (Available for all pipe sizes)
-LXH Extra Heavy - For Extra Heavy Cast Iron Pipe (Available for all pipe sizes)
-LXH Extra Heavy - For PVC Pipe (Available for 2", 3", 4", and 8" pipe sizes only)
-LPVC Plastic Pipe - For PVC or ABS pipe (Available for 6" pipe size only)
 * This Dimension to Internal Stop of Speedi-Set® Gasket.
** When Flange-F is specified Min. 1 1/8 (29) becomes 1 5/8 (41)

REGULARLY FURNISHED:
Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Scoriated Secured Nickel Bronze Top and Carpet Clamping Frame.

VARIATIONS:
☐ Flashing Flange -F
☐ Flange with Flashing Clamp -F-C
☐ Vandal Proof Top -U

OPTIONAL MATERIALS:
☐ Galvanized Cast Iron -G
☐ Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER

4033 (-X)

Left margin:
D
DRAWING NUMBER s4033(-X)BS
SIZE A
SCALE: NONE
DATE: 7-26-06
APPROVED BY: CEL
CHECKED BY: CL
DRAWN BY: TBW
FIGURE NUMBER 4033 (-X)
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov