


FINISHED FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

SQUARE NICKEL BRONZE TOP

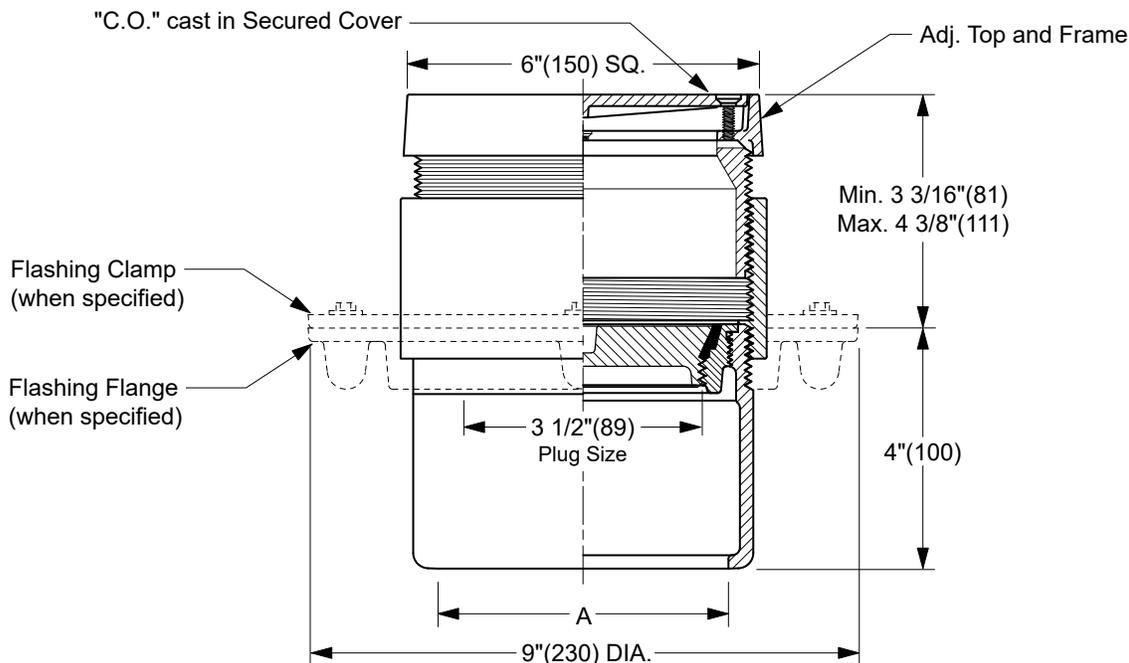

TWIS-TO-FLOOR® ADJUSTMENT

INSIDE CAULK OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4045C.....Gasket Seal - ABS Plug
- Fig. 4046C.....Gasket Seal - Bronze Plug
- Fig. 4048C.....Taper Thread - Bronze Plug
- Fig. 4049C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Square Adjustable Scoriated Secured Nickel Bronze Top. Closure Plug Type as Indicated by Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER S4045

SCALE: NONE

DATE: 2-16-70

APPROVED BY: JM

CHECKED BY: BH

DRAWN BY: RK

4045 SERIES

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

L K J H	4-11-24 08-11-23 07/26/02 10/17/00	Added ASME Note Removed Function Corrected Clamp & Flange view New design	HS HS JJ JJ	CL CL CL BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4045 SERIES
REV.	DATE	DESCRIPTION	BY	CKD. BY			