


GD Series

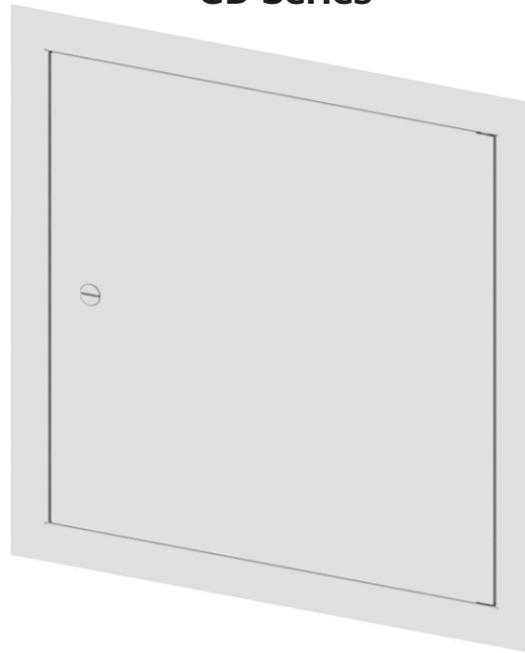

Gasketed Access Doors

Gasketed Access Doors are ideally suited for new installations or for remodeling, in masonry, tile, wood or other wall and ceiling surfaces. Access door is fully gasketed and is commonly used in clean rooms, laboratories, operating rooms , etc.

Door and Frame are fabricated from 18 gage, galvanized steel with a white prime coat finish. Door and frame are designed to form a tight seal reducing air infiltration by placing gaskets on all three sides of the door stop and gasketing the space between the door and frame.

Gasket material consists of 1/8" x 3/8" oil-resistant, fire-retardent blended Buna-N Foam.

Frame is four piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely.

Latch is screwdriver operated.

Finish is a white prime coat.

Guide Specification

Provide Elmdor[®] GD Series, Gasketed Access Doors. Access door and frame shall be fabricated from 18 gage, galvanized steel with a white prime coat finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no mitres or welds on the face. Door and frame shall have a tight seal reducing air infiltration by placing gaskets on all three sides of the door stop and gasketing the space between the door and frame. Latch shall be screwdriver operated.



MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

- GD Gasketed Access Door (18 Gage Steel)

Suffix Options


- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)

STANDARD AVAILABLE SIZES

Special sizes available upon request.



NOMINAL DOOR SIZE (W X H)

INCHES	WALL OPENING	LATCHES	LBS.
GD 8" x 8"	8-1/2" x 8-1/2"	1	3.5
GD 12" x 12"	12-1/2" x 12-1/2"	1	6
GD 16" x 16"	16-1/2" x 16-1/2"	2	9
GD 18" x 18"	18-1/2" x 18-1/2"	2	10.5
GD 24" x 24"	24-1/2" x 24-1/2"	2	16
GD 24" x 36"	24-1/2" x 36-1/2"	2	22

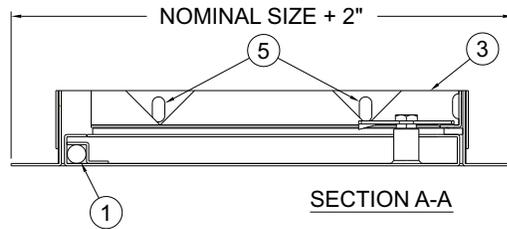

NOTES:

1. CONCEALED PIVOTING ROD HINGE
2. DOOR
3. FRAME
4. SCREWDRIVER OPERATED LATCH
5. MOUNTING HOLES

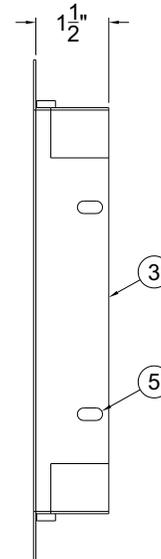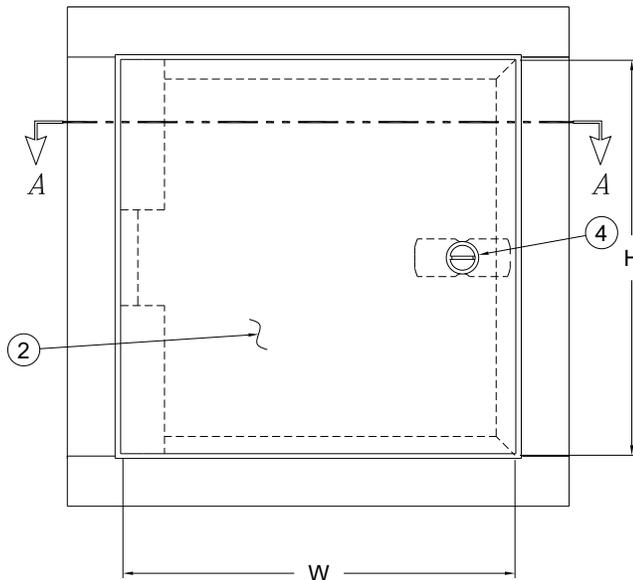

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit www.elmdorstoneman.com for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

GD

Revised: 08/31/18