


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

ADJUSTABLE STRAINER HEAD

Free Area
 12.50 SQ IN
 (81) SQ CM

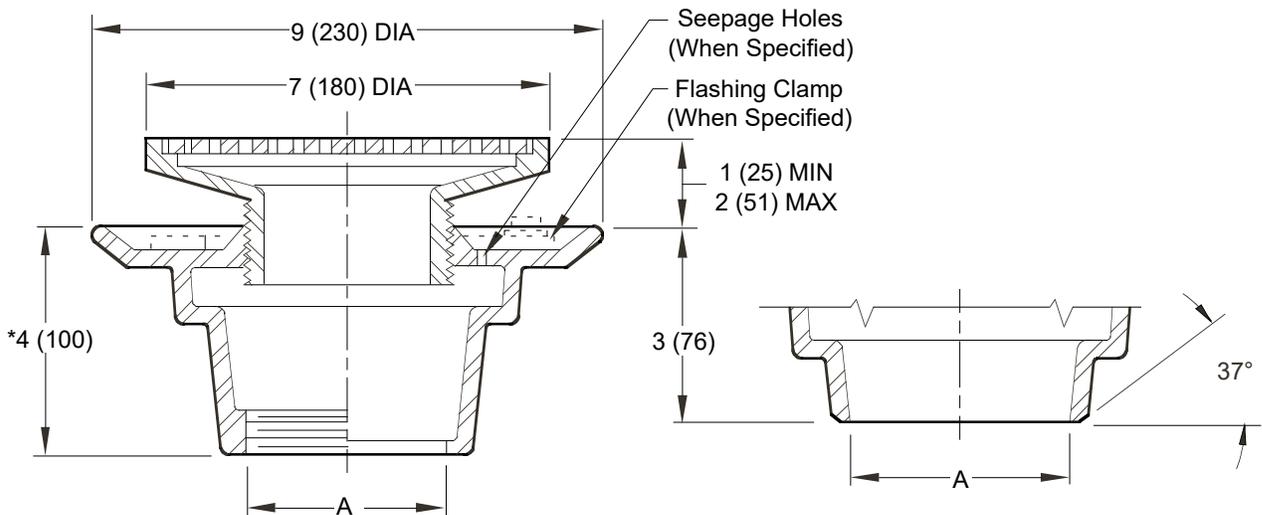

*Dimension becomes 3 3/8"(86) for NO-HUB Outlet

A (Pipe Size) = 02(50), 03(75) or 04(100)

Butt Weld Outlet
 Schedule 40 Regularly Furnished

- Fig. 9700BW BUTTWELD OUTLET (Specify Sch -S05, -S10, -S40 or -S80)
- Fig. 9700C CAULK OUTLET
- Fig. 9700T THREADED OUTLET
- Fig. 9700Y NO-HUB OUTLET

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304)
 Rough Finish Stainless Steel
 Body and Round Adjustable
 Strainer Head with Satin
 Finished Top.

VARIATIONS:

- Flashing Clamp with Seepage Holes -C
- Seepage Holes -WSH
- Solid Cover -SC
- Vandal Proof Grate -U
- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- 90° Outlet (Specify Fig. 9759)
- 1/2"(13) Trap Primer Connection -P050

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- CF8M (Equivalent To Type 316) Stainless Steel -316
- Nickel Bronze Strainer -NB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S9700

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD

CHECKED BY:
VGD

DRAWN BY:
PJ

9700

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

N	10-16-24	Revised Fig. 9700BW	HS	JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9700
M	8-24-23	Removed Function	HS	CL			
L	8-18-15	Rev. Text, Var., Added Note	TBW	CL			
K	10-17-11	Added Note	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			