


# TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

## SQUARE NICKEL BRONZE TOP WITH TERRAZZO RECESS

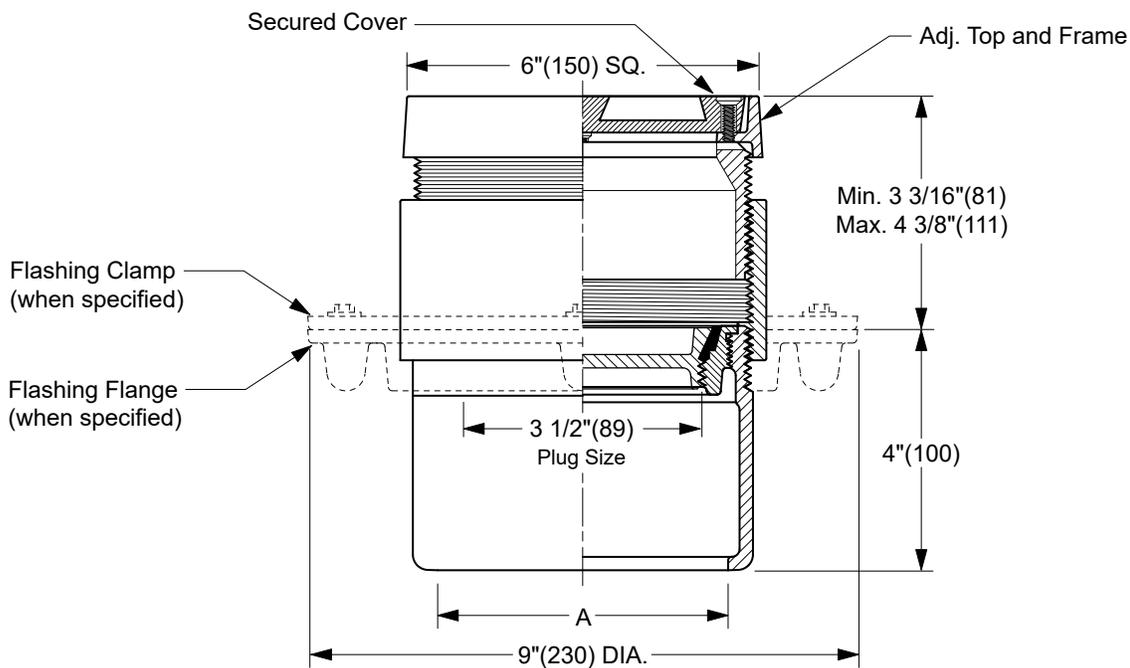

TWIS-TO-FLOOR® ADJUSTMENT

INSIDE CAULK OUTLET

"A" (Pipe Size) = 02(50), 03(75) or 04(100)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4205C.....Gasket Seal - ABS Plug
- Fig. 4206C.....Gasket Seal - Bronze Plug
- Fig. 4208C.....Taper Thread - Bronze Plug
- Fig. 4209C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

**NOTE:** Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**

Duco Cast Iron Cleanout with Square Adjustable Secured Nickel Bronze Top with 1/2"(13) Terrazzo Recess. Closure Plug Type as Indicated By Figure Number Selected.

**VARIATIONS:**

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER **S4205**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **2-16-70**  
 APPROVED BY: **JM**  
 CHECKED BY: **BH**  
 DRAWN BY: **RK**  
**4205 SERIES**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

M	4-11-24	Added ASME Note	HS	CL	WEIGHT	VOLUME	FIGURE NUMBER
L	8-17-23	Removed Function	HS	CL	POUNDS	CUBIC FEET	<b>4205 SERIES</b>
K	1-20-22	Removed "C.O." cast in"	KK	CL			
J	07/29/02	Corrected Clamp & Flange view	JJ	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			