



Since 1966

ELECTRIC TANKLESS WATER HEATER - POINT OF USE

Invizable™ Water Heater

IDEAL APPLICATIONS: Public Lavatory

Invizable™ PRODUCT FEATURES

- Invizable™ wall sleeve conceals your Chronomite Heater inside the wall
- Chassis is ideally suited for new installations or for remodeling in masonry, tile, wood or other wall surfaces
- Series starts with 3-1/4" Depth Chassis allowing for standard wall depth installations
- 6 entry points to route electrical and water connections in any direction as needed per installation
- 4 bottom entry points constructed with knockouts for bulkhead and or sealed installation
- Slots in Chassis allow for different wall thicknesses and allow easy adjustment to align Wall Frame
- 1/4" mounting holes (Quantity 12 in chassis)
- Door/Frame (16 gage) and Chassis (20 gage) are fabricated from galvannealed steel with a prime coat white finish
- Concealed Pivoting Rod Hinge prevents distortion and closes door squarely
- Pre Studs #8-32 are provided on chassis for easy mounting of CMI series heater
- Models with Electrical Disconnect are pre-wired for ease of installation
- Latch is screwdriver operated (Standard Models)
- Door Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening
- Door has rounded safety corners
- Patent Pending



Z-C1616 Shown

GUIDE SPECIFICATION

Wall Sleeve shall be a Chronomite Laboratories Model

Z - _____

OPTIONS

Unit shall be fabricated from galvannealed steel with a white prime coat finish suitable for painting. Access door shall have rounded safety corners and concealed pivoting rod hinge. Door/Frame 16 gage and wall sleeve 20 gage thickness. Latch shall be screwdriver operated. Wall Sleeve to have 10 entry points including 4 knockouts for bulkhead and or sealed installation.

OPTIONS

<input type="radio"/> -AKL	Allen Key Latch
<input type="radio"/> -CL	Cylinder Lock (one per door)
<input type="radio"/> -SS	Stainless Steel Construction (Type 304 No. 4 Satin Finish)
<input type="radio"/> -SRK	Semi Recess Kit

MODEL NUMBERS	NOMINAL SIZE	WALL OPENING	ELECTRICAL DISCONNECT
Z-C1616	16" x 16"	16-1/2" X 16-1/2" x 3-1/4"	NO
Z-C1616D	16" x 16"	16-1/2" X 16-1/2" x 5-1/4"	YES / PRE-WIRED

Complies
with
Standards
for:

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CHRONOMITE LABORATORIES, INC.


17451 Hurley St. :: City of Industry, CA 91744
Phone 800-447-4962 :: 626-937-4270
Fax 626-937-4279 :: www.chronomite.com

MEMBER OF

MORRIS GROUP
INTERNATIONAL

Z-CMI 05/15/23

Invizable™ Water Heater

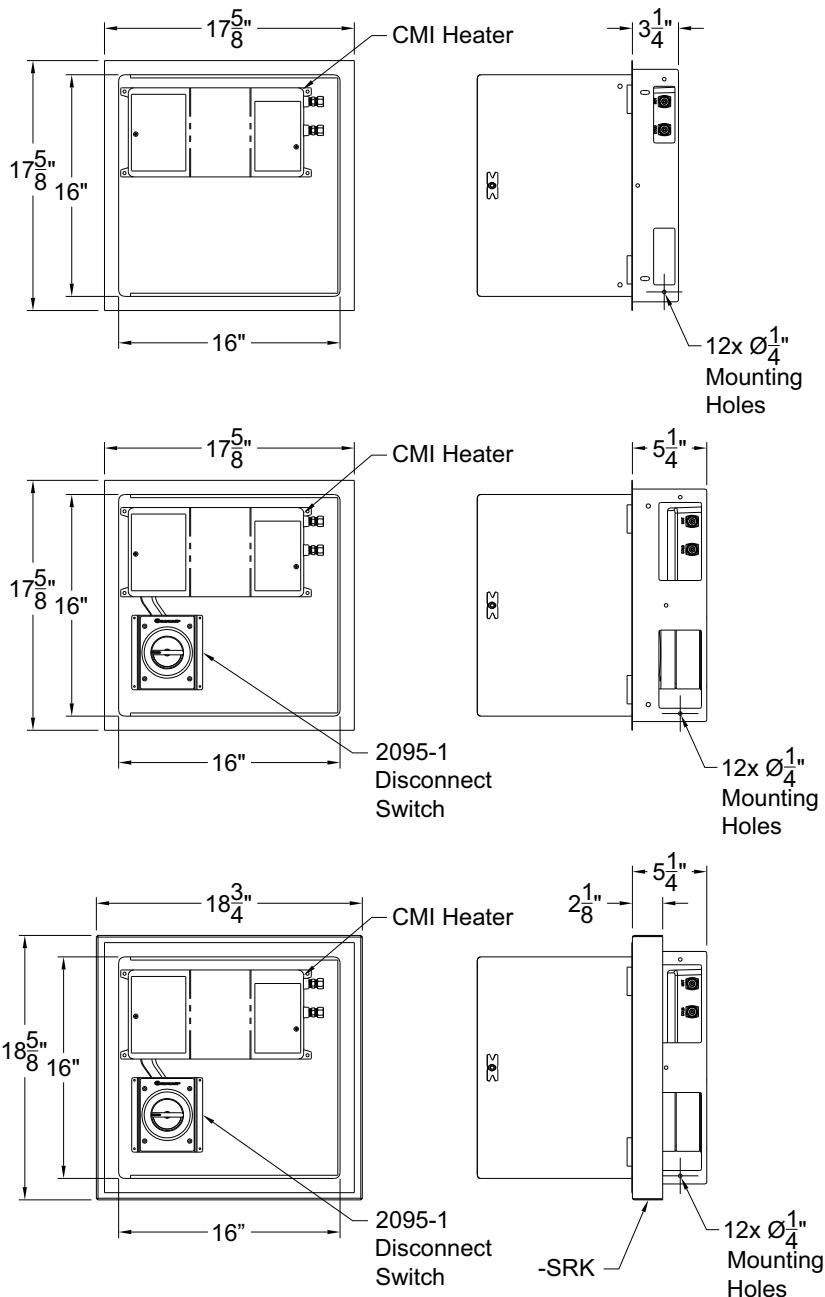

Complies
with
Standards
for:

CHRONOMITE LABORATORIES, INC.
 17451 Hurley St. :: City of Industry, CA 91744
 Phone 800-447-4962 :: 626-937-4270
 Fax 626-937-4279 :: www.chronomite.com

MEMBER OF

**MORRIS GROUP
INTERNATIONAL**

Invizable™ Water Heater

CMI Series Heater

GUIDE SPECIFICATION

Tankless Water Heater shall be a Chronomite Laboratories Model

CMI - L /
 AMPS VOLTS

OPTIONS

with Amps and Volts

to heat to a preset temperature of

104°F (40°C) 110°F (43°C)
 (Meets ADA)

Unit shall be provided with Celcon waterways, and Nichrome heating coils. Temperature controlled by microprocessor and integrated thermostatic mixing valve meeting ASSE 1069, CSA B125.3-12 and ASSE 1070 compliancy.

OPTIONS

1/2" Male NPT (NPT08)
 Disconnect Switch, Rotary 40A - Lockable
 Nema 4X (2095-1)

For the model being selected, please place the corresponding amps and volts values in the Guide Specifications to the right.

MODEL	AMPS	VOLTS	90°C WIRE	WATTS	ACTIVATION GPM	°F TEMPERATURE RISE @				
						0.35 GPM	0.50 GPM	1.00 GPM	1.50 GPM	2.00 GPM
CMI-12L/120	12	120	14 AWG	1440	0.20	28	20	---	---	---
CMI-12L/208	12	208	14 AWG	2500	0.20	49	34	---	---	---
CMI-12L/240	12	240	14 AWG	2880	0.20	56	39	20	---	---
CMI-12L/277	12	277	14 AWG	3320	0.20	65	45	23	---	---
CMI-15L/120	15	120	14 AWG	1800	0.20	35	25	---	---	---
CMI-15L/208	15	208	14 AWG	3120	0.20	61	43	21	---	---
CMI-15L/240	15	240	14 AWG	3600	0.20	70	49	25	---	---
CMI-15L/277	15	277	14 AWG	4150	0.20	70+	57	28	---	---
CMI-20L/120	20	120	12 AWG	2400	0.20	47	33	---	---	---
CMI-20L/208	20	208	12 AWG	4160	0.20	70+	57	28	---	---
CMI-20L/240	20	240	12 AWG	4800	0.20	70+	66	33	22	---
CMI-20L/277	20	277	12 AWG	5540	0.20	70+	70+	38	25	---
CMI-30L/120	30	120	10 AWG	3600	0.20	70	49	25	16	---
CMI-30L/208	30	208	10 AWG	6240	0.20	70+	70+	43	28	21
CMI-30L/240	30	240	10 AWG	7200	0.20	70+	70+	49	33	25
CMI-30L/277	30	277	10 AWG	8310	0.20	70+	70+	57	38	28
CMI-40L/208	40	208	8 AWG	8320	0.20	70+	70+	57	38	28
CMI-40L/240	40	240	8 AWG	9600	0.20	70+	70+	66	44	33
CMI-40L/277	40	277	8 AWG	11080	0.20	70+	70+	70+	50	38

Note 1: Maximum temperature rise may be governed by preset outlet temperature.

Note 2: Local plumbing and electrical codes must be followed for installation of water heater and the accessories.

Chronomite Laboratories assumes no responsibility for use of void or suspended data. © Copyright Chronomite Laboratories, Inc.
 Member of Morris Group International, City of Industry, CA Please visit www.chronomite.com for most current specifications.

**SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING**

Company _____

Model Number & Options _____ Quantity _____

Contact _____ Title _____

Signature _____ Date _____
 (Approval for
Manufacturing)

**CHRONOMITE
LABORATORIES, INC.**

PH. 800-447-4962

626-937-4270

FAX 626-937-4279

www.chronomite.com