


# FREEZELESS SILLCOCK

**FUNCTION:** For installation in interior or exterior building walls where an exposed hose connection is acceptable. Self-Draining feature provides positive non-freeze protection and integral vacuum breaker provides backflow protection.

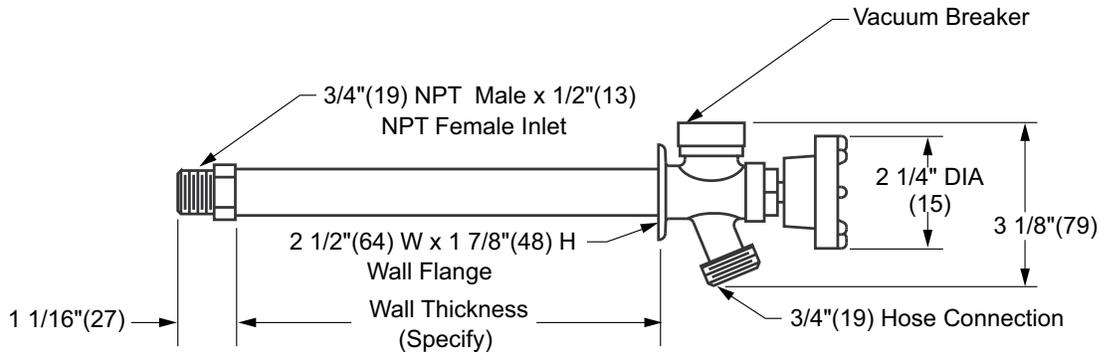

- Fig. M3630-04(100) Wall Thickness
- Fig. M3630-06(150) Wall Thickness
- Fig. M3630-08(205) Wall Thickness
- Fig. M3630-10(255) Wall Thickness
- Fig. M3630-12(305) Wall Thickness

**NOTES:**

1. Recommended wall opening 1 1/4"(32). Hydrant shall be installed in horizontal position only with hose connection pointing down.
2. When ordering, specify wall thickness in 02"(51) increments as follows: 04(100), 06(150), 08(205) 10(255) or 12 (305).
3. All hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
4. The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
5. Dimensions shown in parentheses are in millimeters.
6. FOR IRRIGATION PURPOSES ONLY.

**REGULARLY FURNISHED:**

Rough Bronze Chrome Plated Non-Freeze Hydrant with Integral Wall Flange and Vacuum Breaker, Wheel Handle and 3/4"(19) Hose Connection.

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

<b>SELECTION SUMMARY &amp; APPROVAL FOR MANUFACTURING</b>	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit <a href="http://www.murdockmfg.com">www.murdockmfg.com</a> for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	