

GY Series

MODEL GYU64
BARRIER-FREE OUTDOOR PEDESTAL
MOUNTED LARGE CAPACITY BOTTLE
FILLER DESIGN

STANDARD FEATURES

- Adult ADA compliant
- Pushbutton and Hands Free Sensor Operated Bottle Filler
- Auto-Purge Sensor Function to Assure Fresh Water Supply
- Oversize Bottle Filler with Laminar Flow Spout
- Accommodates Extra Large Bottles Up to 7" Dia x 13" Tall
- Resistant To Sunlight, Heat, Moisture And Wear
- Heavy Gauge, Type 304 Stainless Steel Construction with Corrosion And Scratch Resistant Finish
- 100-Mesh Inlet Strainer
- Access Cover, Heavy Duty Stainless Steel,
- Vandal Resistant

SUGGESTED SPECIFICATIONS

Pedestal mounted bottle filler with bi-level drinking fountain shall be Murdock model GYU64. Construction shall be type 304 stainless steel. Pedestal shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9 volt sensor or a pushbutton as standard and provide 1.5 GPM flow. Auto-Purge Sensor function shall activate Bottle Filler for 10 second duration 24 hours after last activation as standard and allow for purge cycle adjustment. Unit shall contain a 100 mesh inlet strainer, 6-AA battery pack and laminar flow spout. Self-closing pushbuttons, needing less than 5 pounds force, shall activate internally mounted valves with adjustable stream regulators. Operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA requirements when mounted appropriately

Product Warranty

3000 Gallon PFAS Filter Certifications

Option Notes:

¹ See separate option sheet

² This option is not available freeze-resistant.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



Model GYU54-PF Shown

MODEL:

(Must Specify)

- GYU64 Satin Stainless Finish (Shown)
- GYU65 Green Powder-Coated
- GYU66 Red Powder-Coated
- GYU67 Blue Powder-Coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

- CV Cartridge Valve On Fountain^{1 2}
- FRU1 Freeze Resistant, 1 Valves¹ (Less Sensor & Filter¹ N/A)
- FRU2 Freeze Resistant, 2 Valves¹ (Less Sensor & Filter¹ N/A)
- FRU3 Freeze Resistant, 3 Valves¹ (Less Sensor & Filter¹ N/A)
- HB1 Hose Bibb, Compression, w/ Hose Threaded Outlet/VB^{1 2}
- HB3 Hose Bibb, Loose Key, Vandal Resistant, Locked Door w/ Hose Threaded Outlet/VB^{1 2}
- IGM In-Ground 14" Mounting Adapter
- JF1 Jug Filler, Spigot, Self-Closing Valve w/ Plain End^{1 2}
- JF2 Jug Filler, Pushbutton, Self-Closing Valve w/ Plain End¹
- JFFR1 Jug Filler, Pushbutton, Freeze Resistant, Self-Closing Valve¹
- MO Bottle Filler Operated By Pushbutton Only (Standard w/ Freeze-resistant Valves)
- NP1 Non-Pollutable, Freeze Resistant, 1 Valves (Less Sensor & Filter¹ N/A)
- NP2 Non-Pollutable, Freeze Resistant, 2 Valves (Less Sensor & Filter¹ N/A)
- NP3 Non-Pollutable, Freeze Resistant, 3 Valves (Less Sensor & Filter¹ N/A)
- PF Pet Fountain Receptor¹
- SLPT 10° Bottle Filler Sloped Top

ACCESSORIES

(additional costs may be incurred)



- AP Auto-Purge Sensor Function Controller
- IAP In-Ground Anchor Plate
- WF3000 3000-Gallon PFAS Water Filter¹ NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics (N/A with -FRU¹ and NP¹ Freeze Resistant Valve)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU, -NP" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GY Series

MODEL GYU64
BARRIER-FREE OUTDOOR PEDESTAL MOUNTED
LARGE CAPACITY BOTTLE FILLER DESIGN

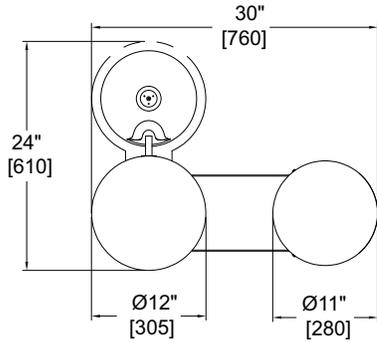

**OPTIONAL -PF PET
FOUNTAIN DETAIL**

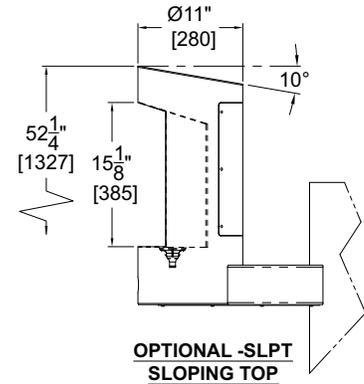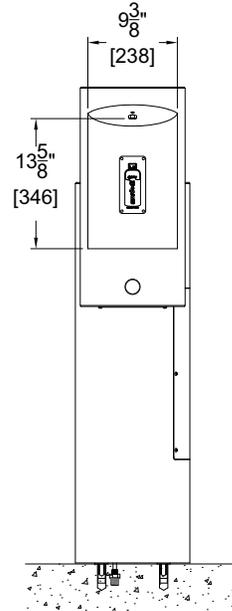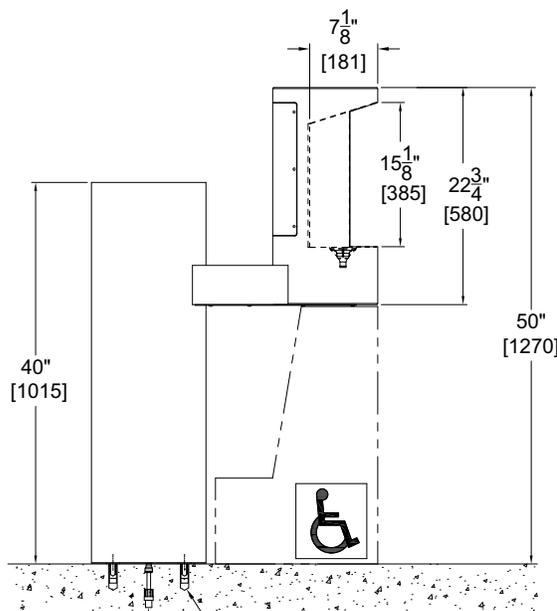

**OPTIONAL -SLPT
SLOPING TOP**

1/2" NPTM SUPPLY INLET FLEXIBLE CONNECTION
SUPPLIED ANCHORS

* Valve specifications:
Minimum/Maximum Pressure
30 to 100 psi.

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. STOP VALVE NOT PROVIDED
3. MODELS MANUFACTURED FROM JANUARY 2025 TO PRESENT INCLUDE LARGER BOTTLE FILL AREA.

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Model Number & Options _____	Quantity _____	All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®. Please visit www.murdockmfg.com for most current specifications.
	Company _____		
	Contact _____	Title _____	
	Signature (Approval for Manufacturing) _____	Date _____	