



Division of
 Acorn Engineering Company®



A MEMBER OF



**Whitehall
 Ligature Resistant
 Solid Surface Toilet
 ADA Compliant
 Wall Supply
 Model WH2135-W**

Features:

- Universal Design
- ADA Compliant
- Normalized Look and Aesthetic
- Suitable for Traditional Restrooms
- Bariatric Toilet Applications
- Load Rating of 25,000 LBS
- Vandal Resistant
- Easy to Clean Contours



Whitehall BestCare® Solid Surface Toilet is designed to foster a peaceful, well-balanced environment, combining a stylish, sleek appearance with enhanced patient safety. Its Universal Design supports ligature resistance, ADA accessibility, accommodation for individuals of size, and traditional restroom applications. Unit is engineered to allow retrofit to existing Toilet Waste rough-ins, providing labor savings and ease of installation for renovation.

On-Floor Toilet is designed for installation against a finished Wall from the Fixture side, utilizing a concealed Wall Mounting Channel. The Bowl interior is rimless to allow easier, more sanitary cleaning while eliminating ligature points for wedging objects. Its unique Flushing Rim design delivers a full 360-degree rinse to wash down the Bowl interior. Vandal-Resistant exposed Fasteners are included to complete the Assembly. Wall Mounting Hardware is provided by the Installer to suit site conditions.

Toilet Housing, Bowl and Seat are constructed of Corterra® Solid Surface Polymer Resin, which is GREENGUARD® Gold listed, WaterSense® Certified and conforms with ANSI Z124.3, ANSI Z124.6, and ANSI/ICPA SS-1 standards. Toilet Bowl color furnished is Blanco OCC11 (Glossy White).

Integral Toilet Seat features a contrasting color to enhance visibility and assist users with cognitive impairment. Seat color is -OCC21 Moonstone Metallic (Gray Gloss) and optionally available in -OCC11 Blanco (Glossy White) to match Toilet Bowl.

Static load rating for the On-Floor Bowl is IAPMO Certified to withstand 25,000 lbs. [11,340 kg] without permanent damage, providing exceptional vandal resistance and long-term durability for demanding environments.

Toilet P-trap and Blowout Jet Fittings are fabricated of type 304 stainless steel and allow for Customer specified Wall or Floor Waste Outlet dimensions.

Toilet is siphon jet type with an elongated Bowl conforms with ASME A112.19.3, CSA B45.4 and ADA Standards for Accessible Design. Toilet requires a minimum of 25 PSI flow pressure and will operate with a minimum water consumption of 1.28 GPF (4.8L). P-trap has a minimum 3-1/2" seal, and will pass a 2-1/8" ball.

Toilet Waste Outlet connection is offered for Wall or Floor Waste and includes a Recessed Gasket Flange to make up connection with Industry Standard Closet Flange.

Toilet Wall Supply Inlet includes a 1-1/2" Female NPT Flushing Inlet connection for Wall (Concealed) Flush Valve supply.

Optional Flush Valve Access Panels are available in complementary finishes for Wall Supply models and shall be specified separately to suit the application. Note: For Ligature-Resistant ADA applications ensure adequate spacing for Closure-Type Grab Bar designs.

Optional Hinged Toilet Seats are offered for traditional settings or the unit may be Factory drilled for a Hinged Seat to be provided by others.

Important: Hinged Toilet Seats present a ligature risk and should not be used in Behavioral Health settings.

Please visit www.whitehallmfg.com for most current specifications.



Complies with the following standards:





-W Wall Supply (Concealed F.V.) | Wall Waste Toilet

BASE MODEL NUMBER (Must Specify)


- WH2135-W-2 Wall Waste Outlet, Wall Supply, Solid Surface Toilet, ADA Compliant (*Specify Rough-In*)
 - 5-1/2" Standard
 - Specify (*Refer to Chart Below to Indicate Required Dimension*)

TOILET SEAT OPTIONS


- HS-OFLC Hinged Seat, White, Open Front Less Cover, Self-Sustaining Check Hinge
- HS-OFWC Hinged Seat, White, Open Front With Cover, Self-Sustaining Check Hinge
- PFS Drilled for Seat Provided by Others (*Industry Standard 5-1/2" Bolt Centers*)

PRODUCT OPTIONS


- OCC11 Integral Seat with Corterra® Color Blanco -OCC11 (Glossy White) Same as Toilet Bowl
 Standard Color is Moonstone Metallic OCC21 (Gray)

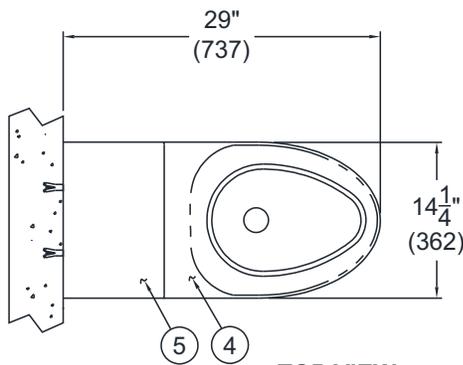

TOP VIEW

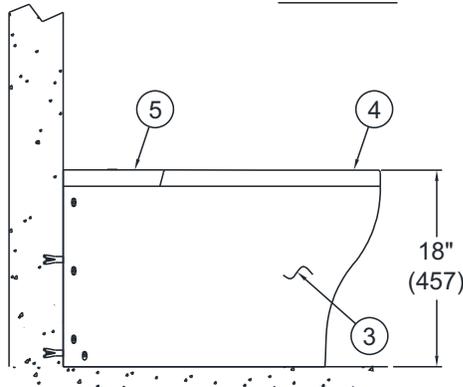

**WH2135-W-2
 SIDE VIEW**

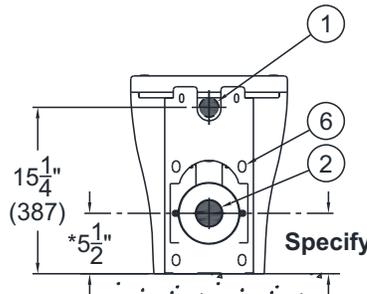

**WH2135-W-2
 REAR VIEW**

NOTES:

1. 1-1/2" NPT, -W Wall Supply Flushing Inlet
2. 5-1/2" Recessed Gasket Flange - Wall Waste (*Indicate Required Dimension*)
3. Solid Surface Floor Waste ADA Toilet
4. Integral Solid Surface Seat
5. Removable Top Access panel
6. Wall Mounting Points (Hardware By Others)

NOTE: Optional Flush Valve Access Panel is not shown and should be specified separately.

-2 WALL WASTE DIMENSION

*** 5-1/2" STANDARD OR SPECIFY
 REFER TO CHART, 3-1/2" - 7-1/2"**

<input checked="" type="checkbox"/> Specify	Wall Waste Off Floor
	3-1/2"
	4"
	4-1/2"
	5"
Select Above	5-1/2" (STD)
	6"
	6-1/2"
	7"
	7-1/2"

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

INSTALLATION:

Units are not intended for In-Wall Mounting Support Carriers. Refer to Installation Instruction Manual for complete details.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.



-W Wall Supply (Concealed F.V.) | Floor Waste Toilet

BASE MODEL NUMBER (Must Specify)


- WH2135-W-3 Floor Waste Outlet, Wall Supply, Solid Surface Toilet, ADA Compliant (*Specify Rough-In*)
 - 10" 12" Specify (*Refer to Chart Below to Indicate Required Dimension*)

TOILET SEAT OPTIONS


- HS-OFLC Hinged Seat, White, Open Front Less Cover, Self-Sustaining Check Hinge
- HS-OFWC Hinged Seat, White, Open Front With Cover, Self-Sustaining Check Hinge
- PFS Drilled for Seat Provided by Others (*Industry Standard 5-1/2" Bolt Centers*)

PRODUCT OPTIONS

- OCC11 Integral Seat with Corterra® Color Blanco -OCC11 (Glossy White) Same as Toilet Bowl
 Standard Color is Moonstone Metallic OCC21 (Gray)

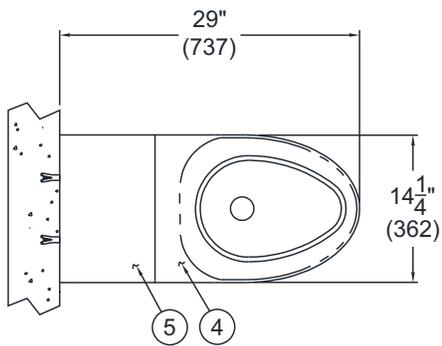


TOP VIEW

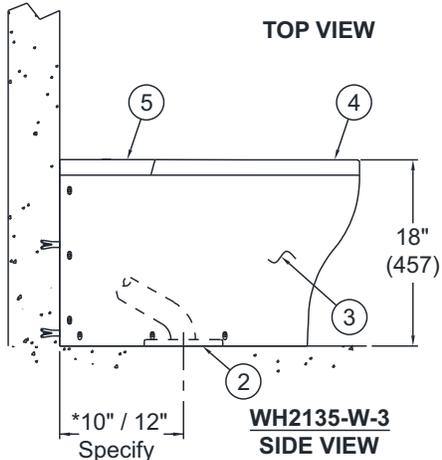

**WH2135-W-3
 SIDE VIEW**

**-3 FLOOR WASTE DIMENSION
 *10" / 12" STANDARD OR SPECIFY
 REFER TO CHART, 4-1/4" - 12-1/2"**



**WH2135-W-3
 REAR VIEW**

NOTES:

1. 1-1/2" NPT, -W Wall Supply Flushing Inlet
2. 7-1/2" Recessed Gasket Flange - Floor Waste (*Indicate Required Dimension*)
3. Solid Surface Floor Waste ADA Toilet
4. Integral Solid Surface Seat
5. Removable Top Access panel
6. Wall Mounting Points (Hardware By Others)

NOTE: Optional Flush Valve Access Panel is not shown and should be specified separately.

✓ Specify	Floor Waste Off Wall
	4-1/4"
	4-1/2"
	5"
	5-1/2"
	6"
	6-1/2"
	7"
	7-1/2"
	8"
	8-1/2"
	9"
	9-1/2"
Select Above	10" (STD)
	10-1/2"
	11"
	11-1/2"
Select Above	12" (STD)
	12-1/2"

DISCLAIMER:

This product is designed to decrease the probability that it may be utilized as an apparatus for ligature. It is not a replacement for professionals who are trained in the proper evaluation, management and supervision of persons at risk of suicide.

All dimensions are nominal and subject to manufacturer's change without notice. Whitehall assumes no responsibility for use of void or superseded data © Whitehall Manufacturing, Member of Morris Group International. Please visit www.whitehallmfg.com for most current specifications.

INSTALLATION:

Units are not intended for In-Wall Mounting Support Carriers. Refer to Installation Instruction Manual for complete details.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____ Quantity _____
 Company _____ Date _____
 Contact _____ Title _____
 Approval for Manufacturing/Signature _____