


TILE FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TILE RECESS

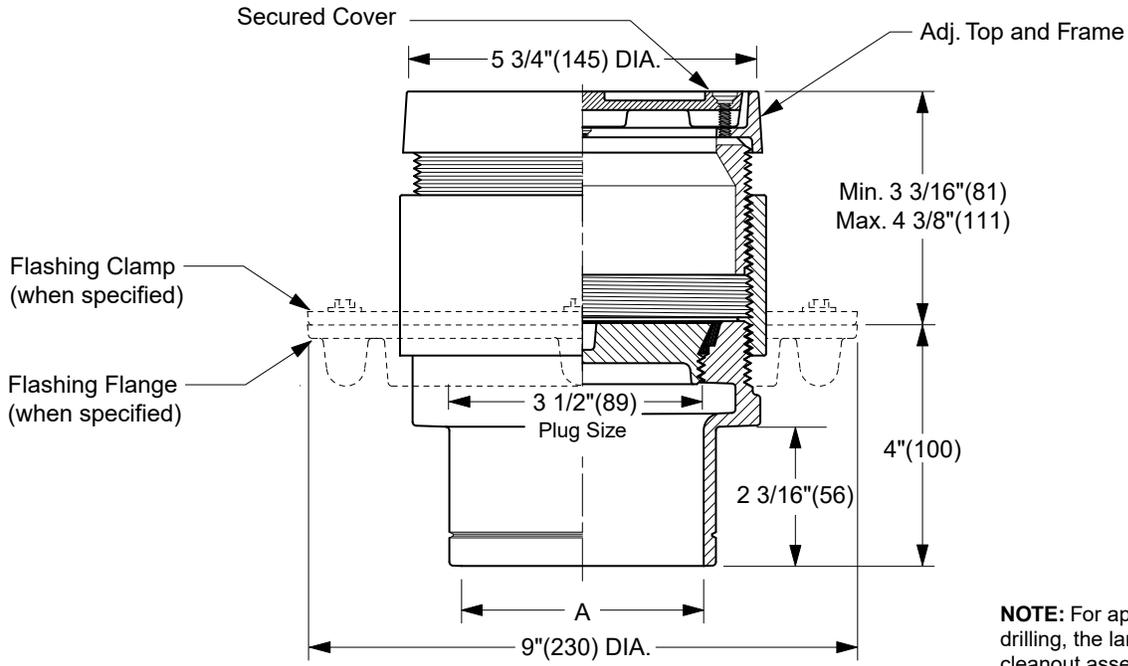

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT

NO-HUB OUTLET

"A" (Pipe Size) = 02(50), 03(75), 04(100) or 05(125)

Conforms to ASME A112.36.2/CSA B79.2

- Fig. 4140S.....Gasket Seal - ABS Plug
- Fig. 4141S.....Gasket Seal - Bronze Plug
- Fig. 4143S.....Taper Thread - Bronze Plug
- Fig. 4144S.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/8"(3) Tile Recess. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB


DRAWING NUMBER: S4140
 SIZE: A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
4140 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <h1 style="margin: 0;">4140 SERIES</h1>
		Added ASME Note Removed Function Removed "C.O." cast in" Added Core-Drilling Note	HS HS KK JJ	CL CL CL CL			

TILE FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TILE RECESS

DRAWING NUMBER S4140BS
SIZE A
SCALE: NONE
DATE: 5-5-06
APPROVED BY: CEL
CHECKED BY: CL
DRAWN BY: RN
4143
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

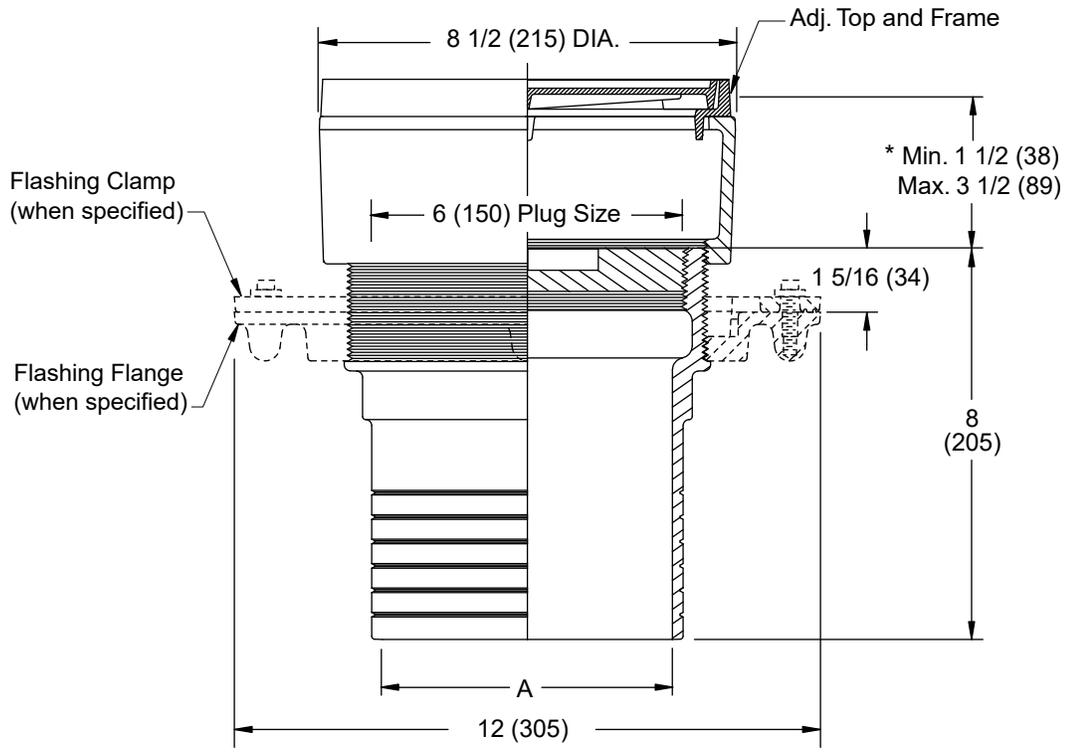

SPIGOT OUTLET ▲
 "A" (Pipe Size) = 06(150) & 08(200)
 Conforms to ASME A112.36.2/CSA B79.2

▲ Sized for Service Weight and/or NO-HUB.
 * When Flange-F is specified Min. 1 1/2 (38) becomes 2 (51)

"TWIS-TO-FLOOR®" ADJUSTMENT
SPIGOT OUTLET ▲
 Fig. 4143S.....Taper Thread - Bronze Plug

REGULARLY FURNISHED:
 Duco Cast Iron Cleanout with Taper Thread Bronze Plug and Round Adjustable Secured Nickel Bronze Top with 1/8 (3) Tile Recess.

VARIATIONS:

<input type="checkbox"/>	Flashing Flange -F
<input type="checkbox"/>	Flange with Flashing Clamp -F-C
<input type="checkbox"/>	Vandal Proof Top -U

OPTIONAL MATERIALS:

<input type="checkbox"/>	Galvanized Cast Iron -G
<input type="checkbox"/>	Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	B A	4-11-24 8-16-23	Added ASME Note Removed Function	HS HS	CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4143
	REV.	DATE	DESCRIPTION	BY	CKD. BY			