


FLOOR OR SHOWER DRAIN WITH ADJUSTABLE STRAINER HEAD AND BALL FLOAT BACKWATER VALVE

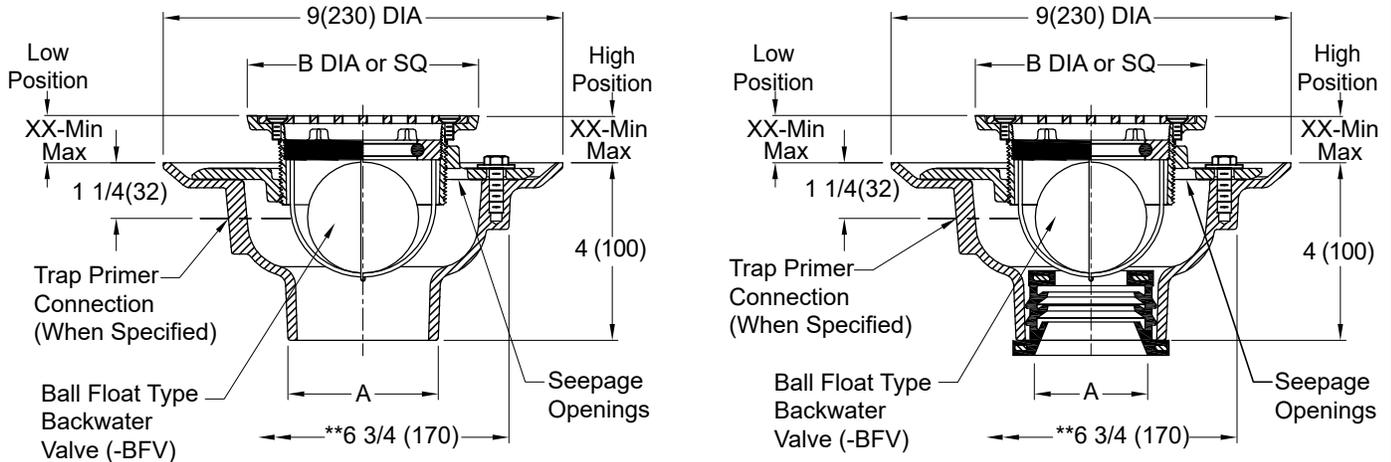

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150)

NO-HUB OUTLET

- Fig. 2005Y (ABFV) ROUND TOP
- Fig. 2005Y (BBFV) SQUARE TOP

SPEEDI-SET® OUTLET

- Fig. 2005Y (ABFV) ROUND TOP
- Fig. 2005Y (BBFV) SQUARE TOP

| Outlet Size | Nickel Bronze Strainer Head | Flow (GPM) |
|-------------|-----------------------------|------------|
| ▲ 02(50) | 05(125) DIA or SQ | 15 |
| ▲ 03(75) | 06(150) DIA or SQ | 38 |
| ▲ 04(100) | 08(205) DIA or SQ | 45 |

| Strainer Size | *Collar In High Position | | *Collar In Low Position | | Free Area SQ IN (SQ CM) | |
|---------------|--------------------------|-----------|-------------------------|-----------|-------------------------|------------|
| | B DIA or SQ | X MIN | X MAX | X MIN | X MAX | ROUND |
| 05(125) | 1 1/4(32) | 2 1/4(57) | 3/4(19) | 1 5/8(41) | 7(45) | 6 1/2(42) |
| 06(150) | 1 1/4(32) | 2 1/4(57) | 3/4(19) | 1 5/8(41) | 9(58) | 12 1/2(81) |
| 07(180) | 1 1/4(32) | 2 1/4(57) | 7/8(22) | 1 7/8(48) | 14(90) | 11(71) |
| 08(205) | 1 1/2(38) | 2 1/2(64) | 1(25) | 1 7/8(48) | 17(110) | 14(90) |
| 09(230) | 1 1/2(38) | 2 3/8(60) | 1(25) | 1 7/8(48) | 18(116) | 16(103) |
| 10(255) | 1 1/2(38) | 2 3/8(60) | 1(25) | 1 7/8(48) | 23(148) | 16(103) |

- ▼ This dimension to internal stop of speedi-set® gasket.
- Add 3/8”(10) to all min/max dimensions for round strainers.
- * Collar is reversible to obtain extreme high and low strainer positions.
- ** Not available for 5”(125) size strainer.
- ** MIN 6 3/4”(170) hole required for core filled application.

REGULARLY FURNISHED:

Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head with Ball Float Type Backwater Valve as Indicated by Suffix Letter Selected.

- ▲ Meets ASME Standard A112.6.3-2001 02(50), 03(75), or 04(100) sizes only.

VARIATIONS:

- Hinged Grate -H
- L Speedi-Set® Service Weight 02(50), 03(75) & 04(100) sizes
- LXH Speedi-Set® Extra Heavy 02(50), 03(75), & 04(100) sizes
- Trap Primer Connection - P050 1/2”(13) & -P075 3/4”(19)
- Vandal Proof Dome -U
- T Threaded Outlet
- Heelproof Grate -HP -AHP (Round) or -BHP (Square)

OPTIONAL MATERIALS:

- Bronze Body -BB
- Chrome Plated Strainer -CP
- Galvanized Cast Iron Body -G
- Nickel Bronze Strainer -NB
- Polished Bronze Strainer -PB

SEE PM0457 FOR OPTIONAL STRAINER HEADS.

NOTE: Dimensions shown in parentheses are in millimeters.

C DRAWING NUMBER s2005-ABFVNB SIZE A SCALE: NONE DATE: 11-3-21 APPROVED BY: CR CHECKED BY: CR DRAWN BY: KK
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
|------|---------|--|----|---------|---------------|-------------------|--------------------|
| | 8-9-23 | Removed Function Added @ to "Speedi-Set" | HS | CL | | | 2005-ABFVNB |
| | 3-10-23 | | KK | CL | | | |