


PARKING DECK FLOOR DRAINS WITH HEAVY DUTY WIDE FLANGE COLLAR FOR PRECAST SLABS

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
 14.25 SQ IN
 (92) SQ CM

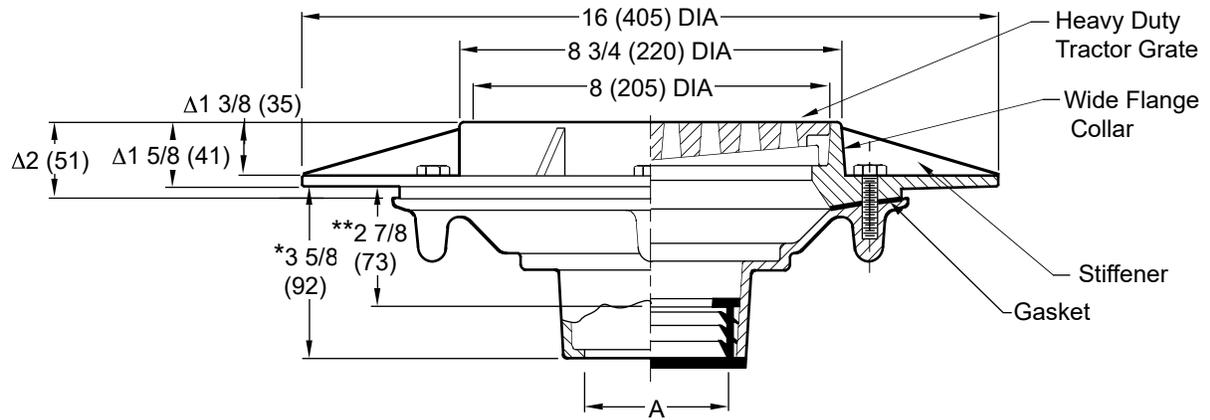

A (Pipe Size) = 02(50), 03(75), 04(100), •05(125) or •6(150)

- Fig. 2614C CAULK OUTLET
- Fig. 2614T THREADED OUTLET
- Fig. 2614Y NO-HUB OUTLET

recommended deck opening 13" (330) DIA

*Same for Caulk and No-Hub, 2 (51) for Threaded.
 **This dimension to internal stop of Speedi-Set gasket.
 Δadd 1/4 (6) when bronze top is specified.
 •NO-HUB only

REGULARLY FURNISHED:
 Duco Cast Iron Body, Heavy Duty Wide Flange Collar with Heavy Duty Tractor Grate.
 Gasket Seal Between Body and Collar.

- VARIATIONS:**
- Dome Bottom Strainer -DBS
 - Cast Iron Flat Bottom Strainer -FBSCI
 - Side Outlet (Specify Fig. 2619)
 - Square Top -S
 - Vandal Proof -U
 - L Speedi-Set Service Weight 2(50), 3(75) & 4"(100)
 - LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100)
 - Underdeck Clamp -C
 - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2614
 SIZE A
 NONE
 SCALE: 5-6-93
 DATE: 5-6-93
 APPROVED BY: BS
 CHECKED BY: CR
 DRAWN BY: TBW
 2614
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 FIGURE NUMBER

N	7-15-24	Rev. Variations, Notes, Fig. Opts.	HS	KV	WEIGHT	VOLUME	FIGURE NUMBER
M	7-23-19	Added Load Rating	MW	JM	POUNDS	CUBIC FEET	2614
L	6-18-19	Removed Function	MW	JM			
K	1-30-18	Rev. Reg. Furn., Title, Added Gasket	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			