

SANI-CEPTOR® STAINLESS STEEL FLOOR, AREA & INDIRECT WASTE DRAINS WITH 12" (304) STAINLESS STEEL SQUARE TOPS

DRAWING NUMBER S3001

SIZE A

SCALE: NONE

DATE: 5-4-82


APPROVED BY: JM

CHECKED BY: KH

DRAWN BY: CR

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

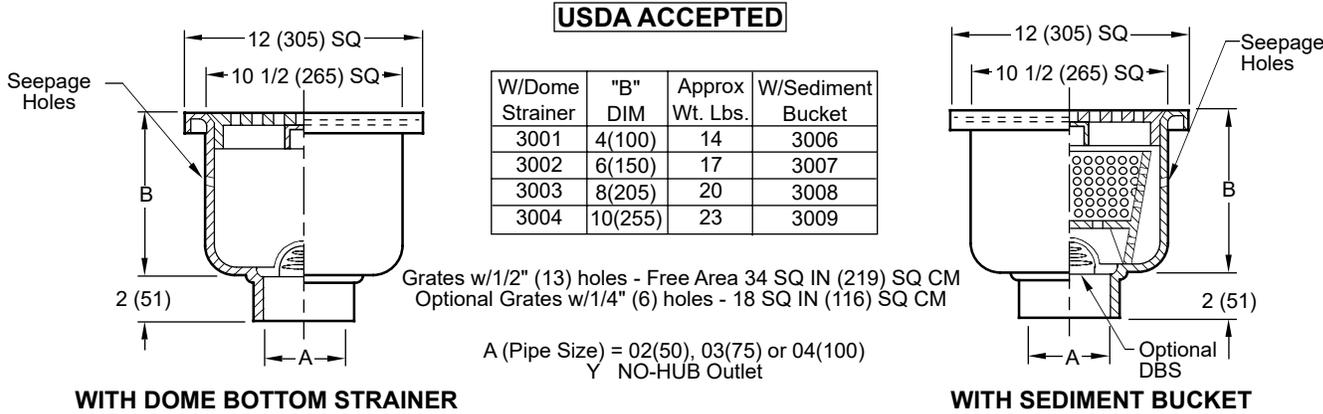

FEATURES, OPTIONS AND ORDERING INFORMATION

REGULARLY FURNISHED: 14 Gauge Type 304 SS Receptor Body with Seepage Control Holes, Cast Type 316 SS Ribbed Non-Tilt Loose Set ADA Grate with 1/2"(13) Square Holes. Perforated SS Dome Bottom Strainer or Sediment Bucket as indicated by Figure Number. Body Rim and Grate are polished to No. 4 finish.

- VARIATIONS:**
- BW Butt Weld Outlet (Specify Schedule -S05, -S10, or -S40)
 - T Male Threaded Connection
 - Less Seepage Control Holes -LSH
 - Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
 - With Anchor Flange -F
 - With Flange and Flashing Clamp -F-C
 - USDA Compliant

- OPTIONAL MATERIALS:**
- Drains: Fabricated from Type 316 Stainless Steel
 - Funnel: Type 304 Stainless Steel
 - Funnel: Type 316 Stainless Steel
- Bucket Models Only:**
- With SS Dome Bottom Strainer -DBS
 - With SS Solid Bottom Ported Bucket -SBP
 - With Mesh Lined Bucket -BS

NOTE:
When determining location of this drain, consideration must be given to traffic loading factors. When used in areas where the drain is subjected to any traffic loading heavier than pedestrian foot traffic, the location, load and description of load shall be submitted to Jay R. Smith's Sales Engineering Department for evaluation and selection of proper grate.

OPTIONAL TOP GRATES AND COVERS

- | SUFFIX | DESCRIPTION |
|------------------------------|-----------------------------------------------------------------------------|
| <input type="checkbox"/> -10 | Less SS Grate |
| <input type="checkbox"/> -12 | With SS 1/2 Grate |
| <input type="checkbox"/> -13 | With SS 3/4 Grate |
| <input type="checkbox"/> -14 | With SS 2 1/2" (64) SQ Center Hole Grate |
| <input type="checkbox"/> -15 | With SS Recessed Grate with Handle |
| <input type="checkbox"/> -18 | With NB Rim and Angle ADA Grate |
| <input type="checkbox"/> -21 | With SS Grate with 4" (100) DIA NB Funnel |
| <input type="checkbox"/> -22 | With SS Grate with 6" (150) DIA NB Funnel |
| <input type="checkbox"/> -25 | With SS Grate with 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval NB Funnel |
| <input type="checkbox"/> -26 | With SS Grate with 6(150) x 2 1/2(64) x 1"(25) High Oval NB Funnel |
| <input type="checkbox"/> -41 | With SS Solid Cover |
| <input type="checkbox"/> -42 | With SS 1/2 Solid Cover |
| <input type="checkbox"/> -43 | With SS 3/4 Solid Cover |
| <input type="checkbox"/> -44 | With SS 2 1/2" (64) SQ Center Hole Solid Cover |

- | SUFFIX | DESCRIPTION |
|------------------------------|----------------------------------------------------------------------------------------|
| <input type="checkbox"/> -61 | With SS Heel-Proof Ribbed Non-Tilt Loose Set Grate with 1/4" (6) SQ Holes. |
| <input type="checkbox"/> -63 | With SS Medium Duty Heel-Proof Ribbed Non-Tilt Loose Set Grate with 1/4" (6) SQ Holes. |
| <input type="checkbox"/> -64 | With SS Heavy Duty Ribbed Non-Tilt Loose Set ADA Grate with 1/2" (13) SQ Holes. |
| <input type="checkbox"/> -66 | With SS Extra Heavy Duty Ribbed Non-Tilt Loose Set ADA Grate with 1/2" (13) SQ Holes. |
| <input type="checkbox"/> -68 | With SS Extra Heavy Duty Ribbed Non-Tilt Loose Set 3/4 Grate with 1/2" (13) SQ Holes. |

NOTE: Dimensions shown in parentheses are in millimeters.

• Flange is Located 2" (51) from Top of Drain 3" (76) When Specified

AA	10-23-24	Removed "-69..." Revised Bucket Models Only	HS	KV	WEIGHT	VOLUME	FIGURE NUMBER
Z	5-24-24	Removed Function	HS	CL	POUNDS	CUBIC FEET	3001-Series
Y	7-24-23	Updated Variations	HS	CL			
X	2-13-23		KK	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			