



Secur-Care® - Ligature Resistant LR1741ADAFA Series

Ligature Resistant Wall Shower - Front Access - ADA Compliant



LR1741ADAFA-03-M

Fixture May Show Some Available Options

Please visit www.acorneng.com for most current specifications.

Ligature Resistant Wall Shower - Front Access - ADA Compliant

Ligature Resistant Shower is designed to be installed on a finished wall and serviced through removable front access panel. Mounting frame is provided. The fixture is fabricated from 14 gauge, type 304 stainless steel and the exterior has a #4 satin finish. Unit conforms with ANSI, UFAS and ADA requirements for accessibility. Compliance is subject to the interpretation and requirements of the local code authority.

NOTE: Not intended for use in California.

Conical Showerheads for both upper and lower fixed head are provided. CSH style heads are chrome-plated brass and are Ligature Resistant with a non-adjustable multi-stream spray.

In-Wall Mounting Frame is constructed of heavy gauge galvanized steel and provides access to service fixture and Panel mounting using Stainless Steel Vandal Resistant Fasteners (provided).

Optional Valves (ADA compliant) available include Electronic metering options and Air-Control metering. Air-Control Valves are pneumatically operated using atmospheric air. Pushbutton is Ligature-Resistant and requires less than 5 pounds of force to activate Valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds on Air-Control Valve and adjustable from 1 second to 1 hour on electronic Valve. Valve includes a 1.6 GPM flow restrictor and can be remotely located up to 10 feet from the operating Pushbutton. Valve conforms with lead free requirements of NSF61, Section 9. Single-temp and Hot water supply on H&C models should be tempered with an appropriate ASSE 1069 Mixing Valve (optionally available) or as required by Local Code.

Regularly furnished items include an ADA compliant metering Air Control Valve (Specify), two Conical Showerheads, Ligature Resistant Hemispherical Pushbutton, a recessed Soap Dish, and necessary Fasteners (Mounting hardware by others). Grab Bar and Folding Seat by others. Refer to accessibility standards and guidelines for additional installation requirements.

GUIDE SPECIFICATION

Provide and install Secur-Care® - Ligature-Resistant, ADA Compliant Ligature-Resistant Wall Shower Front Access (specify model number and options). Shower panel shall be fabricated from 14 gauge, type 304 stainless steel and shall have a #4 satin finish. Exposed trim shall be stainless steel or chrome-plated brass. Fixture shall be furnished with two Ligature-Resistant Conical Showerheads and two Hemispherical Pushbuttons. Shower shall be provided with an ADA compliant Control Valve. A stainless steel recessed Soap Dish shall be factory installed in place. Units to conform with ANSI, UFAS and ADA requirements for accessibility.



Secur-Care® - Ligature Resistant: LR1741ADAF A

Ligature Resistant Wall Shower - Front Access - ADA Compliant

WALL THICKNESS AND TYPE (Reference Only)

Thickness: _____ Type: _____

MODEL NUMBER AND OPTIONS SELECTION:

BASE MODEL NUMBER

- LR1741ADAF A Ligature Resistant Wall Shower
-Front Access - ADA Compliant

VALVE SELECTION (Must Specify)

Air-Trol® (Pneumatic)

- 03-M-MA2 Manifolder Single Temp, Metering
 -04-M-MA2 Manifolder Hot & Cold, Metering

Master-Trol® (Electronic)

- EVS1 Single Temp
 -EVS2 Hot & Cold
 -EVSP1 Single Temp, Piezo Button
 -EVSP2 Hot & Cold, Piezo Buttons

Master-Trol® PLUS (Electronic)

- MTP1 Single Temp
 -MTP2 Hot & Cold
 -MTPP1 Single Temp, Piezo Button
 -MTPP2 Hot & Cold, Piezo Buttons

VALVE SELECTION (Continued)

Time-Trol® (Electronic)

- MVC1 Single Temp
 -MVC2 Hot & Cold

Programmable (Electronic) w/9VDC Plug-In Transformer

- PPZ1 Single Temp Programmable Piezo Button
 -PPZ2 Hot & Cold Programmable Piezo Button

VALVE OPTIONS

NOTE: Valve assemblies are manifolded to serve upper and lower Showerheads and Pushbuttons.

- BRS Brass Body Valve
 -TF Transformer, 120VAC to 24VAC
(-MVC option only)

SHOWERHEAD OPTIONS



- F Flow Control, Must Specify:
 2.0 GPM (Not Intended For Use in California)

PRODUCT OPTIONS

- EG Enviro-Glaze, Specify Color: _____
<https://www.acorneng.com/enviro-glaze>
 -LRD Less Recessed Soap Dish
 -STP7069-12S Mixing Valve Assy

NOTE: Refer to Supplemental Submittals for Option details.

Please visit www.acorneng.com for most current specifications.

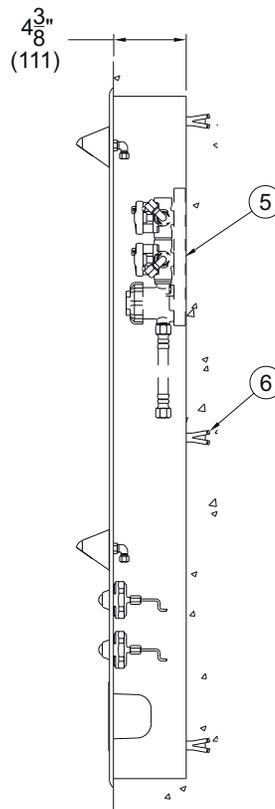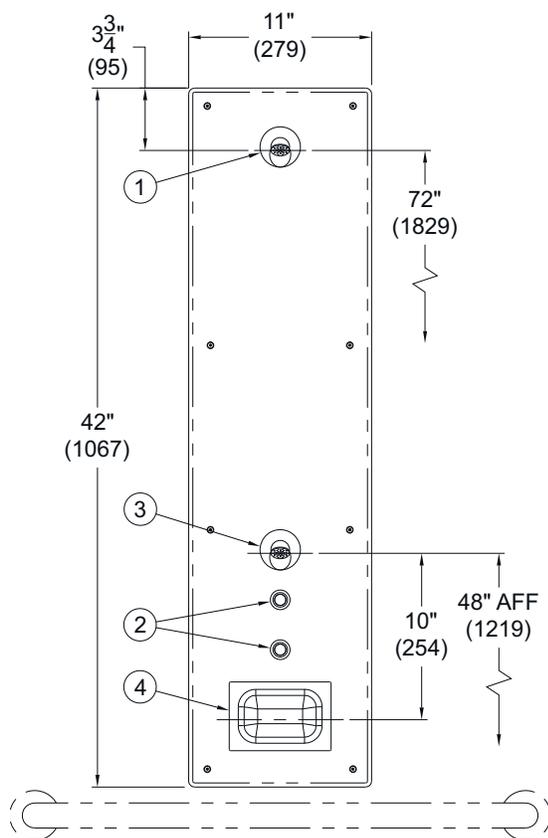

NOTES:

- ① UPPER CONICAL SHOWERHEAD
- ② HEMISPHERICAL PUSHBUTTONS
- ③ LOWER CONICAL SHOWERHEAD
- ④ RECESSED SOAP DISH
- ⑤ -03-M-MA2, MANIFOLDED AIR-CONTROL METERING SHOWN
- ⑥ WALL MOUNTING HARDWARE (BY OTHERS)

LR1741ADAF A-03M-MA2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

<p>Important: Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2006 Acorn Engineering Company</p>	
<p>Selection Summary</p> <p>Model No. & Option _____</p> <p>Quantity _____</p>	<p>Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>