

# LABOR SAVER® HEAVY DUTY FIXTURE SUPPORT FLOOR MOUNTED

## WITH SUPPORTING STUDS, ADJUSTABLE COUPLING AND WASTE FITTING

DRAWING NUMBER  
S0925Y

SIZE  
A

SCALE:  
NONE

DATE:  
04/03/01

APPROVED BY:  
AM


CHECKED BY:  
CR

DRAWN BY:  
JJ

0925Y

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

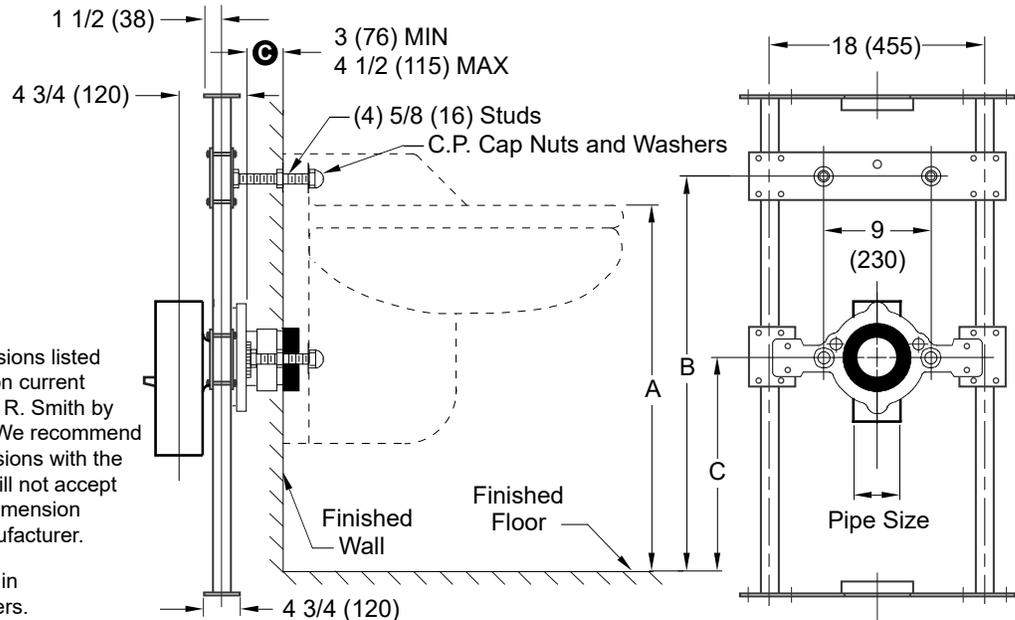

**NOTE:** The rough-in dimensions listed on this drawing are based on current information available to Jay R. Smith by the fixture manufacturers. We recommend that you verify these dimensions with the fixture manufacturer. We will not accept responsibility for rough-in dimension changes by the fixture manufacturer.


**NOTE:** Dimensions shown in parentheses are in millimeters.

Ⓢ This dimension can be increased when fixture support is to be installed behind the wall (specify when required and wall thickness.)

\*SPECIFY SIZE AND TYPE OF FITTING

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1982, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

**Fig. 0925Y . . . WITH SUPPORTING STUDS, ADJUSTABLE COUPLING AND WASTE FITTING 4" (100) NO-HUB AND 4" (100) VENT FOR BACK OUTLET FLUSHING RIM SERVICE SINK**

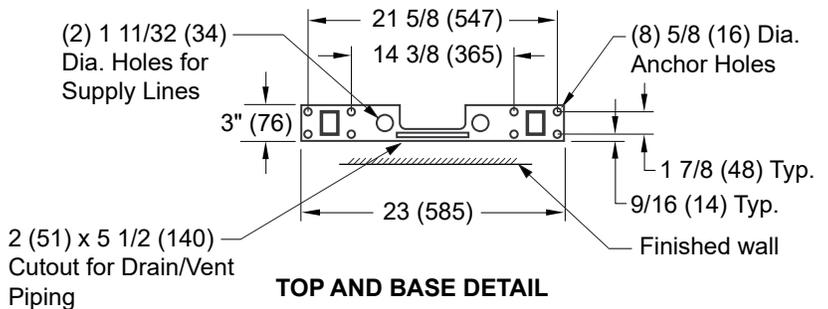

**ROUGHING-IN TABLE**

FIXTURE MFG.	NAME	NUMBER	SIZE	A	B	C

Conforms to ASME A112.6.1M.

D	4-19-24	Added ASME Note Added ® to LABOR SAVER & logo Revised per George Flegel Revised View	HS	JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>0925Y</b>
C	9-27-10		RN	CL			
B	12/11/02		JJ	AM			
A	07/31/02		JJ	AM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			