
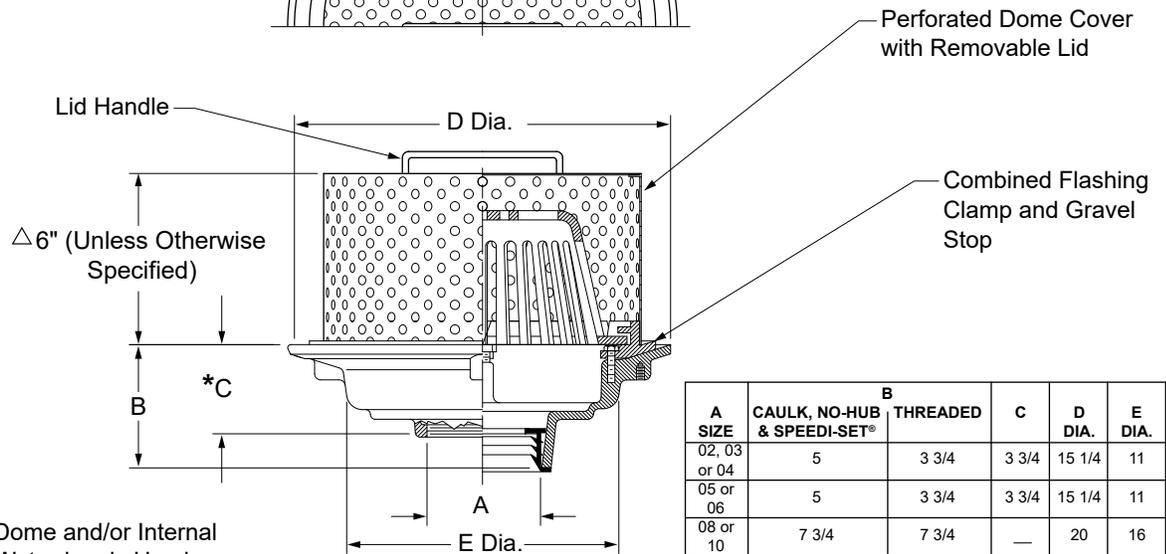


SPECIAL PURPOSE PLANTER DRAIN

GREEN ROOF AND PLANTER LOW PROFILE PERFORATED DOME COVER WITH REMOVABLE LID

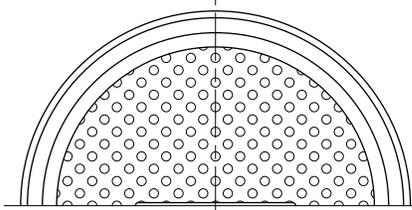

A SIZE	B		C	D DIA.	E DIA.
	CAULK, NO-HUB & SPEEDI-SET®	THREADED			
02, 03 or 04	5	3 3/4	3 3/4	15 1/4	11
05 or 06	5	3 3/4	3 3/4	15 1/4	11
08 or 10	7 3/4	7 3/4	—	20	16

△NOTE: 6" Min. Dome and/or Internal (standpipe) Waterdam is Used.

* This Dimension to Internal Stop of Speedi-Set® Gasket.

- Fig. 1937C CAULK OUTLET
- Fig. 1937T THREADED OUTLET
- Fig. 1937Y NO HUB OUTLET

REGULARLY FURNISHED:

Duco Cast Iron body, Combined Flashing Clamp and Gravel Stop, Polyethylene Dome with Perforated Stainless Steel Dome Cover with Removable Lid.

VARIATIONS:

- L Speedi-Set® Service Weight Outlet Conn. (02, 03, and 04 Sizes Only)
- LXH Speedi-Set® Extra Heavy Duty Outlet Conn. (02, 03, and 04 Sizes Only)
- Roof Deck Plate -RDP
- Extension (Specify Height) -E
- Adjustable Extension -AE
- Vandal Proof Dome Cover -U
- Internal Waterdam Standpipe (See Fig. 1938)
- Underdeck Clamp -C
- Sump Receiver -R

OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Dome -CIDG
- Galvanized Cast Iron Body & Collar -G
- Rough Bronze Dome -RBD
- Stainless Steel Mesh Covered Dome (When Spec.) -SSM
- All Type 304 Stainless Steel -304SS
- All Type 316 Stainless Steel -316SS

DRAWING NUMBER 1937
 SIZE A
 SCALE: NONE
 DATE: 11-7-12
 APPROVED BY: TWK
 CHECKED BY: TK
 DRAWN BY: TBW
 FIGURE NUMBER 1937
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	4-21-25	Revised Variations	HS	CL			1937
	9-27-24	Revised Variations	HS	CL			
	9-29-23	Removed Function	HS	CL			
	3-9-23	Added @ to "Speedi-Set"	HK	CL			