


FLOOR DRAINS

BLOOD AND WATER DRAINS

Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard.
 For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

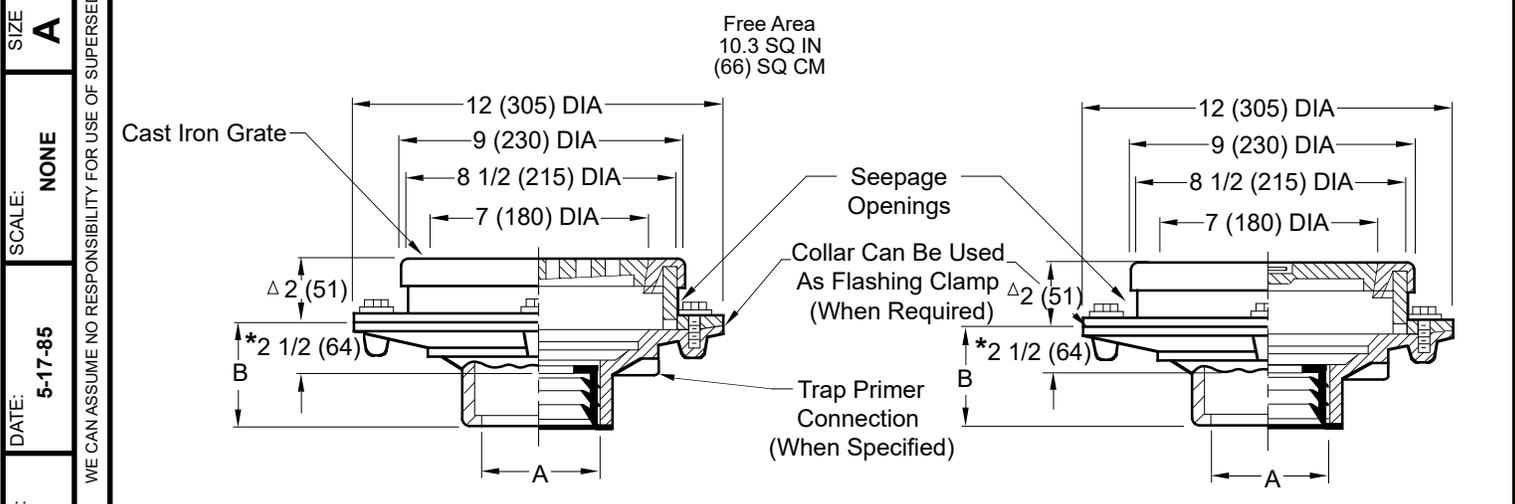

- Fig. 2640C ... CAULK OUTLET
- Fig. 2640T ... THREADED OUTLET
- Fig. 2640Y ... NO-HUB OUTLET

A SIZE	02(50)	03(75)	04(100)	05 (125), 06 (150)
B	3 3/4 (95) for Caulk, NO-HUB and Speedi-Set® 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

*This dimension to Internal Stop of Speedi-Set® Gasket.

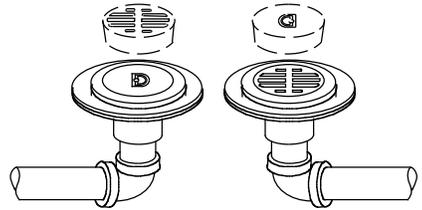


Fig. 2640
TYPICAL INSTALLATION
 Drains are located close to each other for ease of switching grate and plug.

▲ Not available on Fig. 2110T threaded outlet drain.

REGULARLY FURNISHED:
 Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim, Cast Iron ADA Grate and Ground Joint Plug.

- VARIATIONS:**
- L Speedi-Set® Service Weight 2(50), 3(75) & 4"(100) sizes only
 - LXH Speedi-Set® Extra Heavy 2(50), 3(75) & 4"(100) sizes only
 - Quad Close Trap Seal (Specify Fig. 2692)
 - ▲ Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)

- OPTIONAL MATERIALS:**
- Bronze Grate and Plug -RB
 - Galvanized Cast Iron -G
 - Ductile Iron Grate and Plug -M

NOTE: Dimensions shown in parentheses are in millimeters.

2640

2640

FIGURE NUMBER	M L K J	7-16-24 1-8-24 2-28-23 1-23-23	Revised Fig. Opts., Var., Table Revised Variations, Added Note Added -M to Optional Materials Added ADA	HS HS KK KK	KV CB CL JT	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
REV.	DATE	DESCRIPTION	BY	CKD. BY				2640