



TRAFFIC FLOOR DRAINS

MEDIUM DUTY DRAINS WITH OFFSET OUTLET HINGED GRATE AND FREE STANDING SEDIMENT BUCKET

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

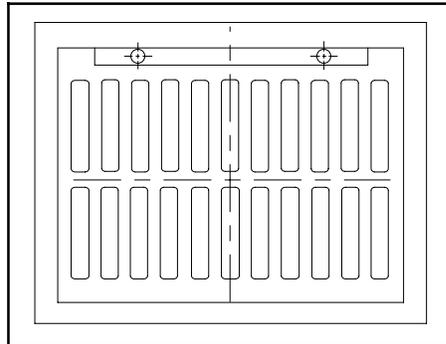

Free Area
 47 SQ IN
 (303) SQ CM

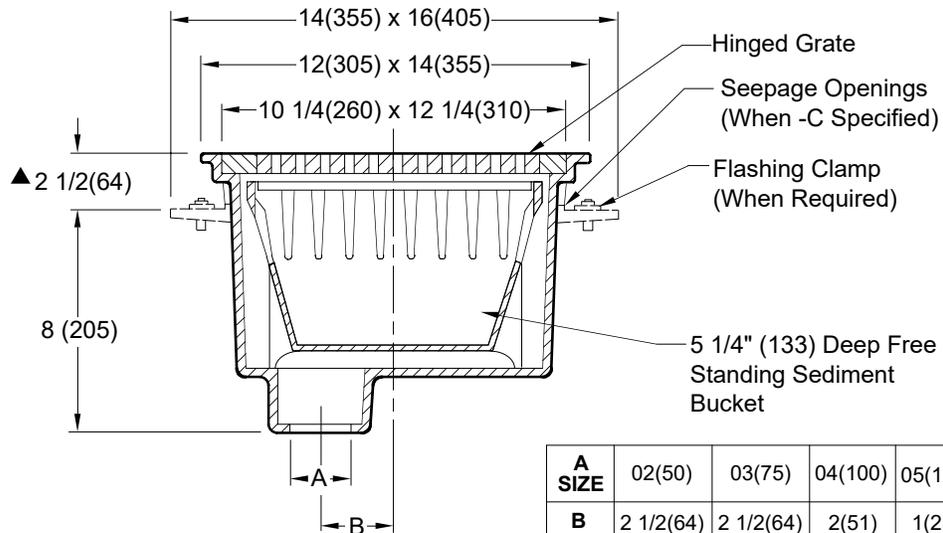

A SIZE	02(50)	03(75)	04(100)	05(125)	06(150)
B	2 1/2(64)	2 1/2(64)	2(51)	1(25)	1(25)

NOTE: Dimensions shown in parentheses are in millimeters.

Fig. 2470C . . . LESS FLANGE
 Fig. 2473C . . . WITH FLANGE

▲ add 5/32"(4) when bronze top is specified.

REGULARLY FURNISHED:

Duco Cast Iron Body with Medium Duty Hinged Grate and Cast Iron Sediment Bucket.

VARIATIONS:

- Flashing Clamp -C (Fig. 2473 only)
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Vandal Proof Grate -U
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692)
- Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)

OPTIONAL MATERIALS:

- Aluminum Bucket -AB
- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9755)

DRAWING NUMBER
S2470

SIZE
A

SCALE:
NONE

DATE:
5-22-89

APPROVED BY:
SB

CHECKED BY:
McD

DRAWN BY:
CMB

2470, 2473

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
L	1-8-24	Revised Variations Revised Function/Reg. Furn. Added Load Rating Removed Function	HS	CB			2470, 2473
K	5-19-2020		MW	JM			
J	7-25-19		MW	JM			
H	6-18-19		MW	JM			