

G
 DRAWING NUMBER
s0211Y, 0221Y (-M54)
 SIZE
A
 SCALE:
NONE
 DATE:
4-3-12
 APPROVED BY:
JM
 CHECKED BY:
AM
 DRAWN BY:
CR
0211Y (-M54)
0221Y (-M54)
 FIGURE NUMBER


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com





LOCATION

ADJUSTABLE FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS

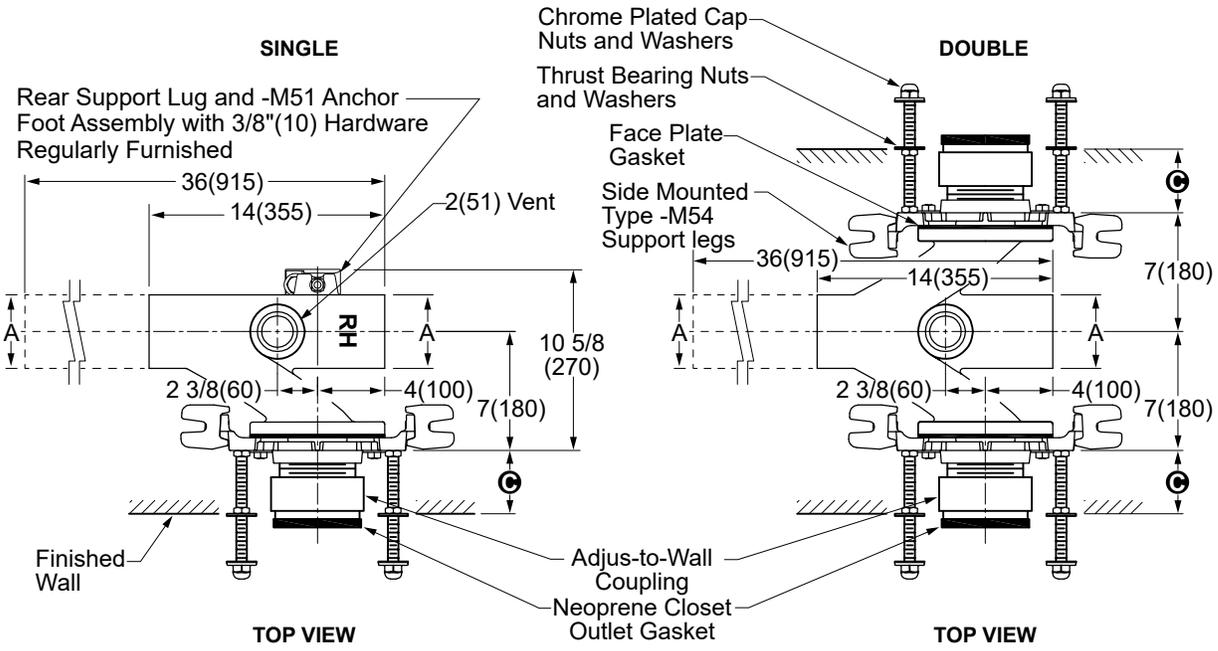

- NOTES:**
1. Base Support must be securely anchored to the floor (with one 1/2"(13) bolt per base support provided by installer.)
 2. All single supports shall have the rear support lug anchored by contractor to assure a rigid installation. The rear support completes the 3 point anchoring system for ultimate stability of the installation.
 3. Dimensions shown in parentheses are in millimeters.
 4. *Dimension to top of vent.

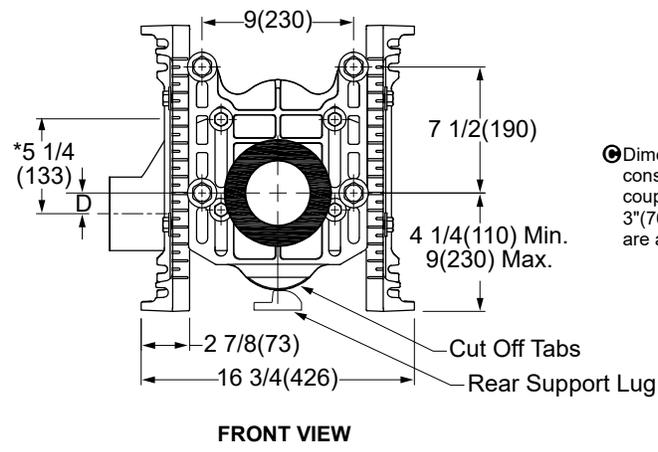

| A SIZE | D | |
|-----------|----------|-----------|
| | MIN | MAX |
| 4(100) | 3/4 (19) | 3 3/8(87) |

⊕ Dimension = 4"(100) (Regularly Furnished) consisting of nipple and Adju-to-Wall coupling permitting adjustment from 3"(76) min. to 4"(100) max. Longer nipples are available, specify ⊕ dimension.

NOTE: Cast Iron Components are Duco Coated.

- Fig. 0211LY (-M54) NO-HUB Left Hand
- Fig. 0211RY (-M54) NO-HUB Right Hand
- Fig. 0211DY (-M54) NO-HUB Double
- Fig. 0221LY (-M54) NO-HUB Left Hand Long Barrel
- Fig. 0221RY (-M54) NO-HUB Right Hand Long Barrel
- Fig. 0221DY (-M54) NO-HUB Double Long Barrel

Conforms with the requirements of ASME A112.6.1M up to a 500 lbs (227kg) static load rating.


| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
|------|---------|-------------------|-----|---------|---------------|-------------------|--|
| | 12-1-23 | Revised Min. Size | HS | CL | | | 0211Y (-M54) 0221Y (-M54) |
| | 12-7-22 | Added Note | KK | CL | | | |
| | 7-6-17 | Added Note | TBW | JM | | | |
| | 9-21-15 | Revised Callout | TBW | CL | | | |

MODIFICATIONS & VARIATIONS

Ⓢ DIMENSION - ADJUS-TO-WALL TYPE OUTLET CONNECTION

The Smith Adjus-to-Wall outlet connection provides adjustment at the face of the wall at the time the fixture is set; thus, compensating for wall construction variations. The Ⓢ dimension is measured from the front of the face plate to the finished wall. To properly determine the length of nipple required, deduct 1" (25) from the Ⓢ dimension. When the Ⓢ dimension exceeds 7" (180), the -M40 Wide Pipe Chase Support is recommended. The Adjus-to-Wall coupling will provide 1/2" (13) horizontal adjustment in either direction with the coupling extended 5/16" (8) past face of the finished wall.

Ⓢ dimension = 4" (100) (regularly furnished) consisting of nipple and adjus-to-wall coupling permitting adjustment from 3" (76) min. to 4" (100) max.
 *ABS (Regularly Furnished) other length PVC.

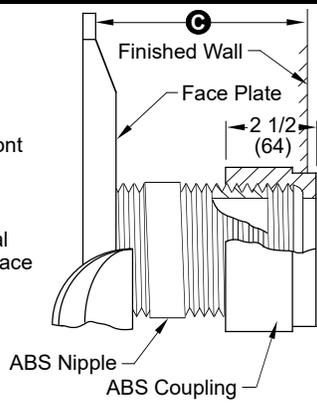

NIPPLE LENGTHS AVAILABLE


| LENGTH | MIN | Ⓢ | MAX |
|--------------|--------------|--------------|-----|
| 2 1/2 (64) | 2 1/4 (57) | 3 1/4 (83) | |
| *3 1/4 (83) | 3 (76) | 4 (100) | |
| *8 1/4 (210) | 8 (205) | 9 (230) | |
| 10 (255) | 9 3/4 (250) | 10 3/4 (275) | |
| 12 (305) | 11 3/4 (300) | 12 3/4 (325) | |
| 15 (380) | 14 3/4 (376) | 15 3/4 (400) | |
| 18 (455) | 17 3/4 (450) | 18 3/4 (475) | |

NOTE: When nipple lengths between 3 1/4" (83) and 8 1/4" (210) are specified, the 8 1/4" (210) nipple will be supplied. Nipple must be cut to specified length by others.


RECOMMENDED SETTING OF CLOSET OUTLET CONNECTION AND FIXTURE STUDS

Manufacturers have slight differences in the depth of the closet horn and flange thickness of their closets. Usually the fixture support closet connection should extend 5/16" (8) beyond face of finished wall (Dimension "R") and the fixture studs 2 1/4" (57) (Dimension "X"). For exact dimensions please use the formulas below.


DETAIL A Formula for "R" is: $S + 1/16" (2) - D = R$
 S = Depth of closet horn
 1/16" (2) = Distance closet is to set away from finished wall.
 D = 1/2" (13) for felt gasket and 3/8" (10) for neoprene gasket.
 R = Distance coupling should extend beyond finished wall.
 NOTE: When the fixture is installed, closet gasket must be compressed sufficiently to assure a gas and water-tight seal.

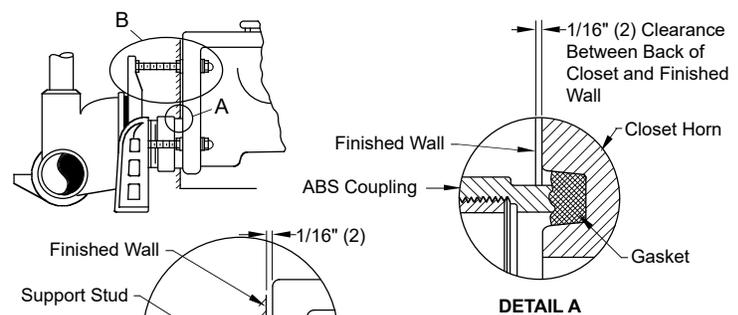


DETAIL B Formula for "X" is: $Y + 1/16" (2) + 9/16" (14) = X$
 Y = Thickness of closet wall flange.
 1/16" (2) = Distance closet is to set away from finished wall.
 X = Distance supporting stud should extend beyond finished wall.
 NOTE: Bearing nuts and washers must be set to take full loading from the fixture allowing 1/16" (2) clearance between fixture and wall.

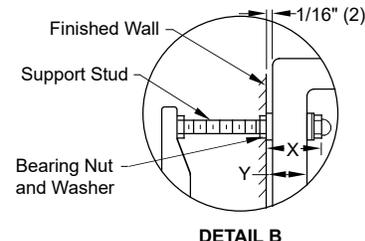


NOTE: Dimensions shown in parentheses are in millimeters.

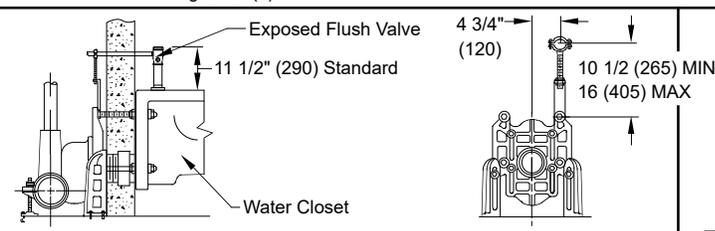

Provides support and alignment for the supply pipe to an exposed flush valve; must be specified for either 1" (25) copper tube or 1" (25) iron pipe.
 SUFFIX -M12 EXPOSED FLUSH VALVE SUPPLY SUPPORT

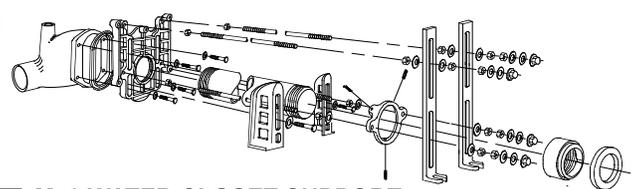


-M40 WATER CLOSET SUPPORT FOR WIDE PIPE CHASE (USE WHEN Ⓢ DIMENSION EXCEEDS 7" (180))

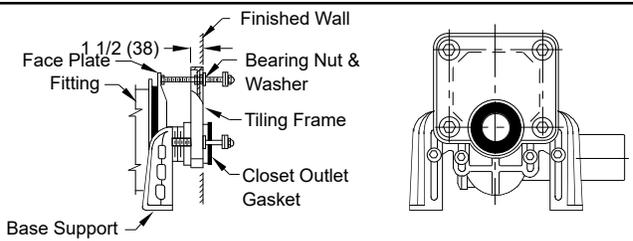

SUFFIX -M13 TILING FRAME - POLYSTYRENE

CONCEALED FLUSH VALVES

A concealed flush valve when used with a blowout water closet support will not clear the face plate. Therefore 4 1/2" (115) to 6 1/2" (165) is required from back of wall to face plate to permit the installation of the concealed flush valve piping.

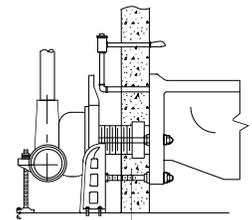

DRAWING NUMBER: S0200BS
 SIZE: A
 SCALE: NONE
 DATE: 2-28-86
 APPROVED BY: JD
 CHECKED BY: CR
 DRAWN BY: VGD
 0200/0300 Series Back Sheet

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| REV. | DATE | DESCRIPTION | BY | CKD. BY |
|------|----------|-------------------|-----|---------|
| C | 12-10-03 | Revised Notes | RN | CL |
| B | 6-1-95 | Added Millimeters | EMB | BS |
| A | 7-1-93 | Submittal Update | EMB | BS |

| | | |
|---------------|-------------------|------------------------------------|
| WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
| | | 0200/0300 Series Back Sheet |