



## Secur-Care® - Ligature Resistant LR1741 Series

Ligature Resistant - Wall Shower



LR1741-03-M-RD

Fixture May Show Some Available Options



Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

### Acorn - Ligature Resistant - Wall Shower

**Ligature Resistant Shower** is arranged to be installed on finished wall and serviced from an accessible pipe chase. Back of Shower Panel is provided with Anchor Tappings. Optional Wall Sleeve or Metal Template is recommended for all installations for required wall openings. Fixture is fabricated from 14 gauge, type 304 stainless steel with a #4 satin finish.

**Conical Showerhead** is chrome-plated brass and is Ligature-Resistant. The spray pattern is non-adjustable.

**Optional Valves** available include Electronic metering options and Air-Control metering. Air-Control Valves are pneumatically operated using atmospheric air. Pushbutton is Ligature-Resistant and requires less than 5 pounds of force to activate Valve. Valve is metering type with non-hold open feature. Timing is adjustable from 5 to 60 seconds on Air-Control Valve and adjustable from 1 second to 1 hour on electronic Valve. Valve includes a 1.6 GPM Flow restrictor and can be remotely located up to 10 feet from the operating Pushbutton. Valve conforms with Lead-Free requirements of NSF61, Section 9. Single-temp and Hot water supply on H&C models should be tempered with an appropriate ASSE 1069 Mixing Valve (optionally available) or as required by Local Code.

**Regularly furnished** items include an metering Air-Control Valve, a Showerhead, and Mounting Hardware for walls up to 12" thick.

#### GUIDE SPECIFICATION

Provide and install Secur-Care® - Ligature-Resistant - Wall Shower (specify model number and options). Shower Panel is fabricated from 14 gauge, type 304 stainless steel with a #4 satin finish. Trim is stainless steel or chrome-plated brass. Shower Valve shall be Air-Control, metering, non-hold open type. Fixture shall be furnished with necessary fasteners for proper installation.

# Secur-Care® - Ligature Resistant: LR1741

## Ligature Resistant Wall Shower



### WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type:  Concrete  Block  Steel

### MODEL NUMBER AND OPTIONS SELECTION:

#### BASE MODEL NUMBER

LR1741 Ligature Resistant Wall Shower

#### VALVE SELECTION (Must Specify)

##### Air-Trol (Pneumatic)

- 03-M Single Temp, Metering
- 04-M Hot & Cold, Metering

##### Master-Trol (Electronic)

- EVS1 Single Temp
- EVS2 Hot & Cold
- EVSP1 Single Temp, Piezo Button
- EVSP2 Hot & Cold, Piezo Buttons

##### Master-Trol PLUS (Electronic)

- MTP1 Single Temp
- MTP2 Hot & Cold
- MTPP1 Single Temp, Piezo Button
- MTPP2 Hot & Cold, Piezo Buttons

##### Time-Trol (Electronic)

- MVC1 Single Temp
- MVC2 Hot & Cold

##### Programmable (Electronic) w/9VDC Plug-In Transformer

- PPZ1 Single Temp Programmable Piezo Button
- PPZ2 Hot & Cold Programmable Piezo Button

### VALVE OPTIONS

- BRS Brass Body Valve
- MA2 Manifoldd, 2-Stack
- TF Transformer, 120VAC to 24VAC (-MVC option only)

### SHOWERHEAD OPTIONS


- CSHS Conical Showerhead With Swivel
- F Flow Control, Must Specify:
  - 2.0 GPM (Not Intended For Use in California)

### PRODUCT OPTIONS

- EG Enviro-Glaze, Specify Color: \_\_\_\_\_  
<https://www.acorneng.com/enviro-glaze-powder-powder-coating>
- MT Metal Template (Only 1 Required Per Project)
- RD Recessed Soap Dish
- SW Wall Sleeve (CMU & Formed Concrete Walls Only)
- STP7069-12S Mixing Valve Assy

**NOTE: Refer to Supplemental Submittals for Option details.**

Please visit [www.acorneng.com](http://www.acorneng.com) for most current specifications.

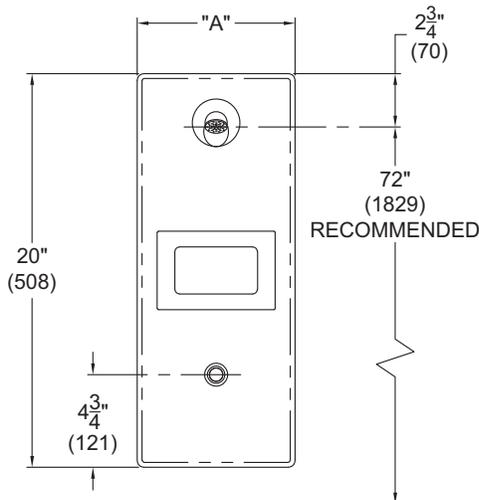


MODEL	'A'
SINGLE TEMP VALVE	8" (203)
HOT & COLD	10" (254)

#### NOTES:

- ① -03-M AIR-CONTROL METERING VALVE SHOWN
- ② CONICAL SHOWERHEAD
- ③ RECESSED SOAP DISH, SHOWN
- ④ HEMISPHERICAL PUSHBUTTON
- ⑤ WALL MOUNTING HARDWARE

### LR1741-03-M-RD

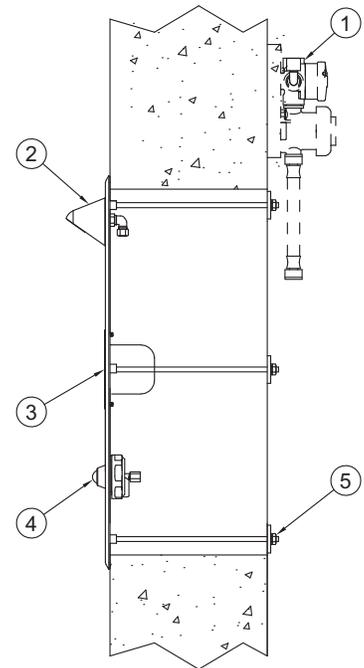

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

<p><b>Important:</b> Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions.                  Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company</p>	
<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>