


# FLOOR DRAINS

## HOPPER DRAINS

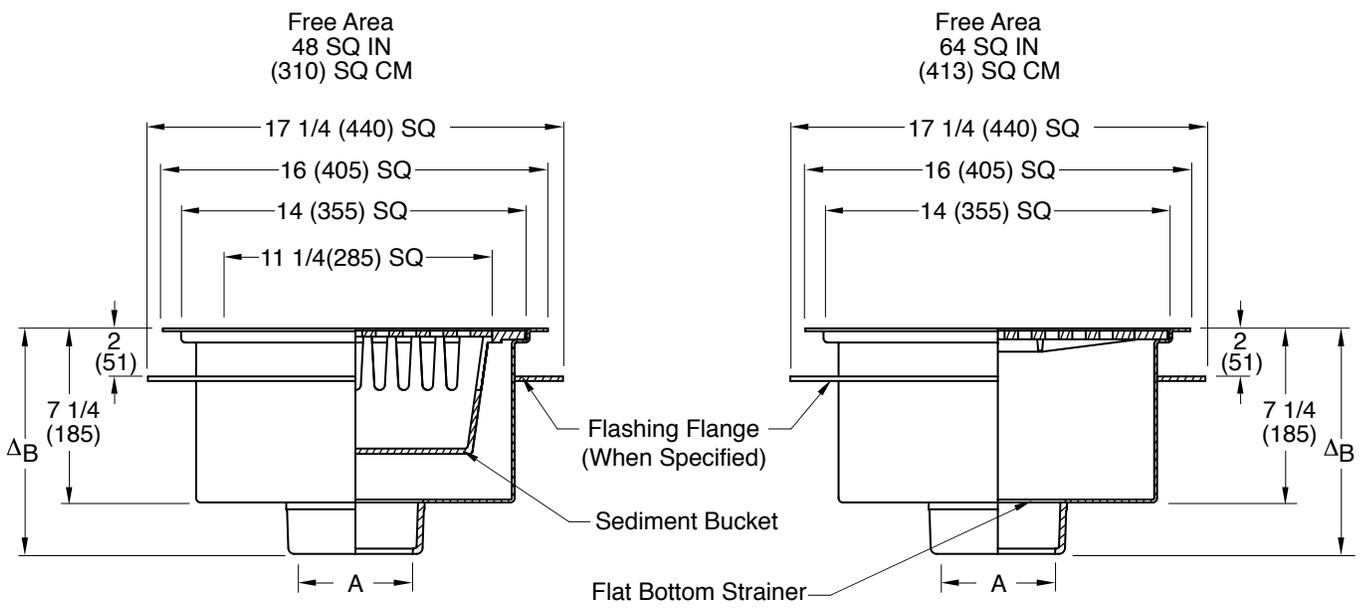

**WITH SEDIMENT BUCKET**

**WITH FLAT BOTTOM STRAINER**

A (Pipe Size) = 2(50), 03(75), 04(100), 05(125) or 06(150)

- Fig. 2635C ... CAULK OUTLET ... WITH GRATE
- Fig. 2635Y ... NO-HUB OUTLET ... WITH GRATE
- Fig. 2636C ... CAULK OUTLET ... LESS GRATE
- Fig. 2636Y ... NO-HUB OUTLET ... LESS GRATE
- Fig. 2637C ... CAULK OUTLET ... WITH GRATE
- Fig. 2637Y ... NO-HUB OUTLET ... WITH GRATE
- Fig. 2638C ... CAULK OUTLET ... LESS GRATE
- Fig. 2638Y ... NO-HUB OUTLET ... LESS GRATE

Δadd 1/4"(6) when bronze top is specified

A Size	B	
	Caulk & No-Hub	Threaded
02(50),03(75)	9 1/2(240)	8(205)
04(100)	9 1/2(240)	8 1/4(210)
05(125), 06(150)	9 1/2(240)	8 3/4(220)

**REGULARLY FURNISHED:**  
 Fabricated Steel Body with Galvanize Coating Inside and Outside, With or Less Cast Iron Grate and Bucket as Indicated by Figure Number Selected.

- VARIATIONS:**
- Flashing Flange -F
  - Flashing Flange with Flashing Device -F-C
  - T Threaded Outlet
  - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Galvanized -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2635  
 SIZE A  
 SCALE: NONE  
 DATE: 3-11-86  
 APPROVED BY: SJM  
 CHECKED BY: CR  
 DRAWN BY: CM  
 2635,36,37,38  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	6-18-19	Removed Function	MW	JM			<b>2635,36,37,38</b>
D	7-14-15	Revised Variations	TBW	CL			
C	3-11-10	Revised Drawing	RN	CL			
B	2-15-10	Revised Drawing	RN	CL			