

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

LEAD SEAL PLUG WITH SQUARE FRAME AND COVER

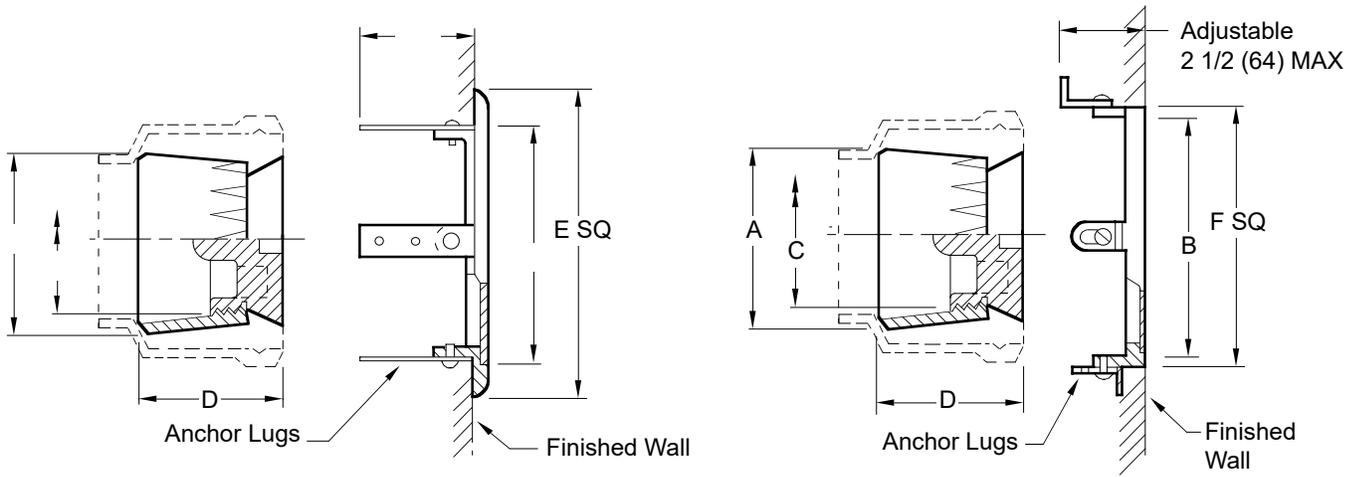


FIG. 4430C FACE-OF-WALL COVER

FIG. 4431C FLUSH-WITH-WALL COVER

A SIZE	B OPENING	C SIZE	D	E SQ	F SQ
02 (50)	6 x 6 (150) x (150)	1 1/2 (38)	2 1/2 (64)	7 3/4 (195)	6 1/2 (165)
03 (75)	6 x 6 (150) x (150)	2 1/2 (64)	2 3/4 (70)	7 3/4 (195)	6 1/2 (165)
04 (100)	6 x 6 (150) x (150)	3 1/2 (89)	3 (76)	7 3/4 (195)	6 1/2 (165)
06 (150)	8 x 8 (205) x (205)	5 1/2 (140)	3 (76)	9 3/4 (250)	8 1/2 (215)
*	10 x 10 (255) x (255)	-	-	11 3/4 (300)	10 1/2 (265)
*	12 x 12 (305) x (305)	-	-	13 3/4 (350)	12 1/2 (320)
*	15 x 15 (380) x (380)	-	-	16 3/4 (425)	15 1/2 (395)

*Covers may be used with any of the above plugs

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Iron Lead Seal Plug, with Chrome Plated Bronze Square Frame and Secured Cover. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

- "T" Handle Plug -TH
- Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screws-U

OPTIONAL MATERIALS:

- Cast Bronze Plug -BP
- Nickel Bronze Frame with Stainless Steel Cover -NB
- Polished Bronze Frame and Cover -PB

DRAWING NUMBER S4430
 SIZE A
 SCALE: NONE
 DATE: 12-9-82
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: TD
 FIGURE NUMBER 4430, 4431
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

K J H G	10-11-24 2-28-24 8-18-23 10-7-14	Revised Table Revised Optional Materials Removed Function Revised Variations	HS HS HS TBW	CL CL CL BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4430, 4431
REV.	DATE	DESCRIPTION	BY	CKD. BY			