

# PLANTING AREA DRAIN

**FOR LARGE AREAS**

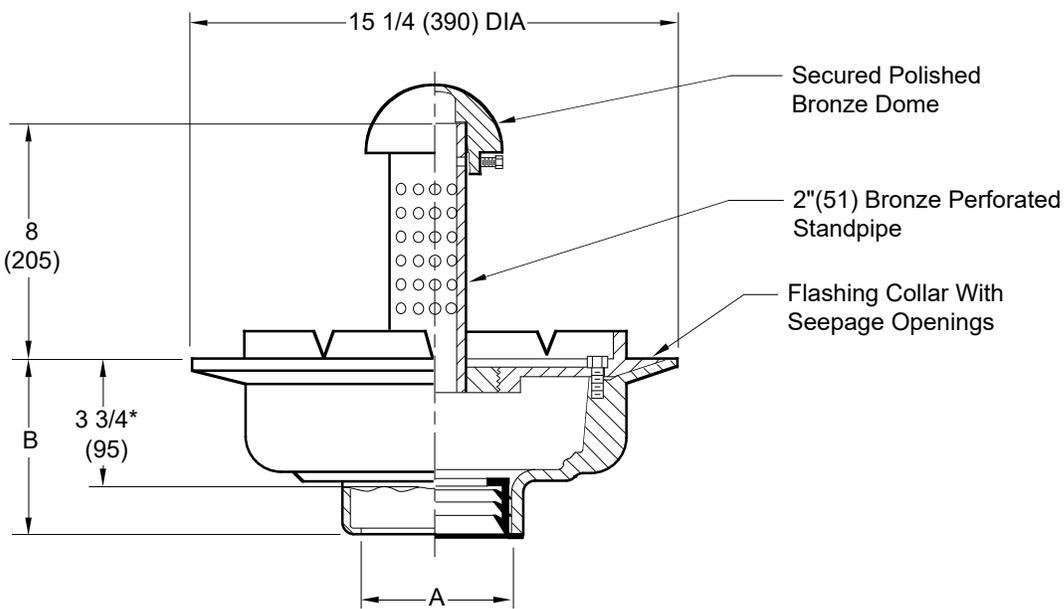


Fig. 2685C . . . CAULK OUTLET  
 Fig. 2685Y . . . NO-HUB OUTLET

\*This Dimension to Internal Stop of Speedi-Set® Gasket.

<b>A SIZE</b>	02(50)	03(80)	04(100)
<b>B</b>	5(125) for Caulk, NO-HUB and Speedi-Set®		
	3 3/4 (95) for Threaded		

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body and Flashing Collar with Bronze 8" High Standpipe and Polished Bronze Dome.

**NOTE:** Dimensions shown in parentheses are in millimeters.

- VARIATIONS:**
- L Speedi-Set® Service Weight
  - LXH Speedi-Set® Extra Heavy
  - Longer Standpipe (Specify)
  - Solid Standpipe -SP
  - Standpipe Covered with Stainless
  - Steel Mesh -SSM
  - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Chrome Plated Dome and Standpipe -CPD
  - Galvanized Cast Iron -G
  - Nickel Bronze Dome Stainless Steel Standpipe -NBD
  - Rough Bronze Dome -RBD

**2685**

FIGURE NUMBER	<b>2685</b>	REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>2685</b>

DRAWING NUMBER **S2685**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **5-17-85**  
 APPROVED BY: **TD**  
 CHECKED BY: **TD**  
 DRAWN BY: **PJ**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA