

PLANTING AREA DRAIN

FOR LARGE AREAS

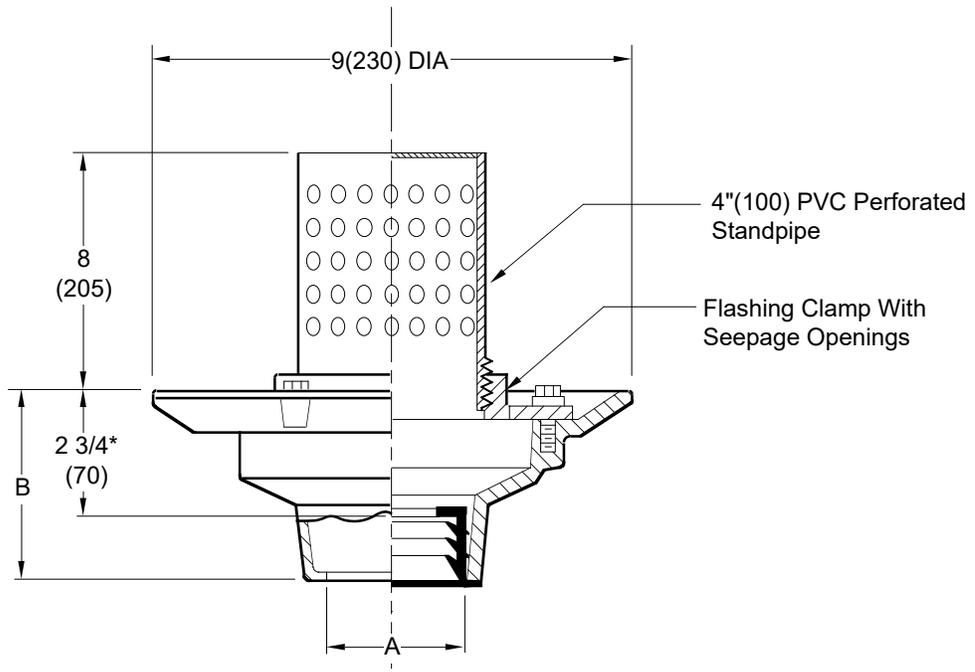


Fig. 2680C-MOD . . . CAULK OUTLET
 Fig. 2680Y-MOD . . . NO-HUB OUTLET

*This dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Clamp can be reversed.

A SIZE	02(50)	03(75)	04(100)
B	4(100) for Caulk, NO-HUB and Speedi-Set 3(76) for Threaded		

REGULARLY FURNISHED:
Duco Cast Iron Body and Flashing Clamp with ABS Standpipe.

- VARIATIONS:**
- Longer Standpipe (When Specified)
 - Solid Standpipe -SP
 - Standpipe Covered w/SS Mesh -SSM
 - L Speedi-Set Service Weight
 - LXH Speedi-Set Extra Heavy
 - T Threaded Outlet

OPTIONAL MATERIALS:
 Galvanized Body -G

NOTE: Dimensions shown in parentheses are in millimeters.

2680-MOD
 DRAWING NUMBER S2680-MOD-CAN
 SIZE A
 SCALE: NONE
 DATE: 01/25/08
 APPROVED BY: CL
 CHECKED BY: CL
 DRAWN BY: JJ
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2680-MOD
C	10-12-23	Removed Function	HS	CL			
B	3/9/22	Changed ABS to PVC	KK	CL			
A	1/30/08	Rev. Function	RN	CL			