

DRAWING NUMBER  
**S2005/3580-CAN**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**11/13/07**

APPROVED BY:  
**AM**

CHECKED BY:  
**AM**


DRAWN BY:  
**JJ**

**2005/3580-CAN**

FIGURE NUMBER

# ROUND FUNNEL FLOOR DRAIN W/ADJ STRAINER HEAD

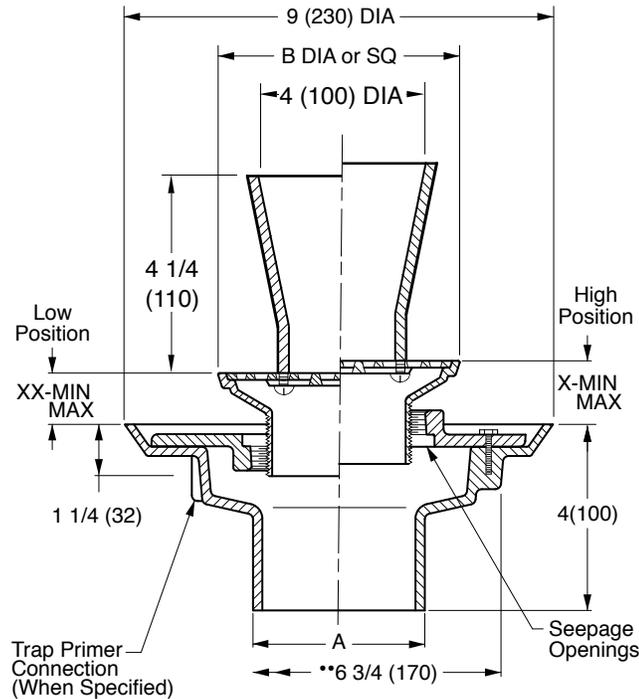WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA



A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Outlet Size	Nickel Bronze Strainer Head
▲ 02(50)	05(125) DIA or SQ
▲ 03(75)	06(150) DIA or SQ
▲ 04(100)	08(205) DIA or SQ

**NO-HUB OUTLET**

- Fig. 2005Y.....(A) ROUND TOP
- Fig. 2005Y.....(B) SQUARE TOP

Strainer Size B DIA or SQ	*Collar In High Position X		*Collar In Low Position XX		Free Area SQ IN (SQ CM)	
	MIN	MAX	MIN	MAX	ROUND	SQUARE
05(125)	1 1/4(32)	2 1/4(57)	3/4(19)	1 5/8(41)	7(45)	6.5(42)

- Add 3/8"(10) to all min/max dimensions for round strainers.
- \* Collar is reversible to obtain extreme high and low strainer positions.
- \*\* MIN 6 3/4"(170) hole required for core drilled application.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Flashing Collar and Adjustable Strainer Head as Indicated by Suffix Letter Selected.

**NOTE:** Dimensions shown in parentheses are in millimeters.

- ▲ Meets ASME Standard A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

- VARIATIONS:**
- Backwater Valve -V
  - L Speedi-Set Service Weight 2(50), 3(75) & 4"(100) only
  - LXH Speedi-Set Extra Heavy 2(50), 3(75) & 4"(100) only
  - Sediment Bucket -B
  - Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
  - Vandal Proof Screws -U
  - Wide Flanged Strainer (Specify Fig. DX2005)
  - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Bronze Body -BB
  - Chrome Plated Strainer -CP
  - Galvanized Cast Iron Body -G
  - Nickel Bronze Strainer -NB
  - Polished Bronze Strainer -PB
  - Stainless Steel (Specify Fig. 9700-A)

**SEE PM0457 FOR OPTIONAL STRAINER HEADS.**

REV.	DATE	DESCRIPTION	BY	CKD. BY


WEIGHT POUNDS	VOLUME CUBIC FEET

**FIGURE NUMBER**  
**2005/3580-CAN**

# OPTIONAL STRAINER HEADS

DRAWING NUMBER: **PM0457 SH 1 of 2**  
 SIZE: **A**  
 SCALE: **NONE**  
 DATE: **5-17-85**  
 APPROVED BY: **TD**  
 CHECKED BY: **TD**  
 DRAWN BY: **PJ**  
 2010 SERIES OPTIONAL STRAINER HEADS  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

## ROUND STRAINER



**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB  
 Stainless Steel  
 Strainers -SS [Available in 05(125) & 06(150) sizes only]


**VARIATIONS:**  
 •Hinged Grate (Specify Suffix -AH)  
 Sediment Bucket -B  
 Vandal Proof Screws -U

B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/2 (64)	2 3/4 (70)

Specify Type, Size & Finish eg: A05NB  
 \*Not available for 05" (125) size

**SUFFIX -A**

## FLAPPER TYPE BACKWATER VALVE



**FUNCTION:** Provides backwater protection at point where protection is needed.

**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB


**VARIATIONS:**  
 •Hinged Grate (Specify Suffix -AH)  
 Vandal Proof Screws -U

B DIA	05 (125)	06 (150)	07 (180)	08 (205)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)

Specify Type, Size & Finish eg: AV05NB  
 \*Not available for 05" (125) size

**SUFFIX -AV**

## SQUARE STRAINER



**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB


**VARIATIONS:**  
 Flapper Type Backwater Valve (Specify Suffix -BV) 05 (125), 06 (150), 07 (180) or 08" (205) sizes only  
 •Hinged Grate (Specify Suffix -BH)  
 Sediment Bucket -B  
 Vandal Proof Screws -U

B DIA	05 (125)	06 (150)	07 (180)	08 (205)	09 (230)	10 (255)
H	2 (51)	2 (51)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 1/4 (57)
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
X MAX	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 1/4 (57)	2 3/8 (60)

Specify Type, Size & Finish eg: B05NB  
 \*Not available for 05" (125) size

**SUFFIX -B**

## STRAINER HEAD w/SQUARE HINGED COVER



**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB


**VARIATIONS:**  
 Gasketed Water Tight Cover -GC  
 Secured Cover -SC  
 Secondary Strainer Grate-SG

Specify Type, Size & Finish eg: BSNB

**SUFFIX -BS**

## REINFORCED ROUND STRAINER

**FUNCTION:** Used in finished floors where light wheeled loads are anticipated.



**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB

**VARIATIONS:**  
 Flapper Type Backwater Valve (Specify Suffix -CV)  
 Sediment Bucket -B  
 Vandal Proof Screws -U

B DIA	05 (125)	06 (150)	08 (205)	10 (255)
H	2 (51)	2 (51)	2 1/2 (64)	2 3/4 (70)
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	1 7/8 (48)
MAX	2 1/4 (57)	2 1/4 (57)	2 1/2 (64)	2 3/4 (70)

Specify Type, Size & Finish eg: C06NB

**SUFFIX -C**

## REINFORCED TRACTOR STRAINER

**FUNCTION:** Used in finished floors where medium weight wheeled loads are anticipated and loose set non-tilt tractor grate is desired.



**MATERIALS:**  
 Cast Iron -CI  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB

**VARIATIONS:**  
 Flapper Type Backwater Valve (Specify Suffix -DV or -EV)  
 Sediment Bucket -B  
 Vandal Proof Screws -U


SUFFIX	B DIA	H	X	
			MIN	MAX
-D	07 (180)	3 1/4 (83)	2 5/8 (67)	3 1/2 (89)
-E	09 (230)	3 1/2 (89)	2 3/4 (70)	3 1/2 (89)

Specify Type, Size & Finish eg: D09PB  
 E09PB

**SUFFIX -D-E**

## TILE FLANGE

**FUNCTION:** Provides integral flange set 5/32" (4) below rim to receive floor covering. Flange may have option of tapped holes for securing pan and gasket.



**MATERIALS:**  
 Chrome Plated -CP  
 Polished Bronze -PB  
 Nickel Bronze -NB

**VARIATIONS:**  
 Flapper Type Backwater Valve (Specify Suffix -FV)  
 Holes in Flange -SH  
 Sediment Bucket -B  
 Vandal Proof Screws -U


	X
MIN	MAX
1 1/4 (32)	2 1/8 (54)

Specify Type, Size & Finish eg: F06NB

**SUFFIX -F**

## ADJUSTABLE STRAINER HEAD

**FUNCTION:** Used in a non-traffic area when a funnel type strainer head is required and space does not allow use of the 3500 series funnel. The extended rim allows use as an anti-flood and anti-splash drip pan.



**VARIATIONS:**  
 Flapper Type Backwater Valve (Specify Suffix -F37V or F38V)

**MATERIALS:**  
 Cast Iron -CI  
 Chrome Plated -CP  
 Galvanized Cast Iron -G  
 Polished Bronze -PB  
 Nickel Bronze -NB

SUFFIX	-F37	-F38
B DIA	07 (180)	09 (230)
H	3 1/4 (83)	3 1/2 (89)
X MIN	2 5/8 (67)	2 3/4 (70)
X MAX	3 1/2 (89)	3 1/2 (89)












Specify Type, Size & Finish eg: F37NB F38CP

**SUFFIX -F37-F38**

REV.	DATE	DESCRIPTION	BY	CKD. BY	FIGURE NUMBER
H	11-3-16	Revised Suffix-A Revised Suffix-BS Revised Revised Tables	TBW	CL	2010 SERIES OPTIONAL STRAINER HEADS 1 of 2
G	10-4-01		RN	CL	
E	8-24-99		TBW	BS	
F	6-11-99		CMD	BS	

NOTE: Dimensions shown in parentheses are in millimeters.

# OPTIONAL STRAINER HEADS

DRAWING NUMBER	LOW DOME STRAINER		SOLID HINGED COVER		SPANNER WRENCH COVER																																																																																
PM0457 SH 2 of 2	<p><b>FUNCTION:</b> Used in gutters and recessed areas where excessive debris build-up is expected. Dome insures drainage even when partly covered.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -GV)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <table border="1" style="font-size: small;"> <tr><td>B DIA</td><td>05 (125)</td><td>06 (150)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/2 (64)</td></tr> <tr><td>MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>MAX</td><td>2 1/4 (67)</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td></tr> </table>		B DIA	05 (125)	06 (150)	08 (205)	H	2 (51)	2 (51)	2 1/2 (64)	MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	MAX	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)	<p><b>FUNCTION:</b> Used in areas where intermittent drain use is required. Solid cover prevents intrusion of chips, saw-dust, etc., which are swept up before cover is opened for washdown. The secondary strainer prevents debris from entering the waste line.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -GV)            Vandal Proof Screws -U</p>  <table border="1" style="font-size: small;"> <tr><td>B DIA</td><td>05 (125)</td><td>06 (150)</td><td>07 (180)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td></tr> <tr><td>X MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>X MAX</td><td>2 1/4 (67)</td><td>2 1/4 (67)</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td></tr> </table>		B DIA	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (67)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (67)	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)	<p><b>FUNCTION:</b> Solid gas tight, vandal proof, threaded cover for areas where intermittent drain use is required.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -JV)            Sediment Bucket -B</p>  <table border="1" style="font-size: small;"> <tr><td colspan="2">6 (150)</td></tr> <tr><td colspan="2">3 (76)</td></tr> <tr><td>MIN</td><td>2 (51)</td></tr> <tr><td>MAX</td><td>3 (76)</td></tr> </table>		6 (150)		3 (76)		MIN	2 (51)	MAX	3 (76)																																			
B DIA	05 (125)	06 (150)	08 (205)																																																																																		
H	2 (51)	2 (51)	2 1/2 (64)																																																																																		
MIN	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																																		
MAX	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)																																																																																		
B DIA	05 (125)	06 (150)	07 (180)	08 (205)																																																																																	
H	2 (51)	2 (51)	2 1/4 (67)	2 1/2 (64)																																																																																	
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																																	
X MAX	2 1/4 (67)	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)																																																																																	
6 (150)																																																																																					
3 (76)																																																																																					
MIN	2 (51)																																																																																				
MAX	3 (76)																																																																																				
SCALE	NONE		NONE		NONE																																																																																
DATE:	5-17-85		5-17-85		5-17-85																																																																																
APPROVED BY:	TD		TD		TD																																																																																
CHECKED BY:	TD		TD		TD																																																																																
DRAWN BY:	PJ		PJ		PJ																																																																																
2010 SERIES OPTIONAL STRAINER HEADS	<p><b>FUNCTION:</b> Used in finished floors where some light wheeled traffic is anticipated.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -KV)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <table border="1" style="font-size: small;"> <tr><td>B SQ</td><td>05 (125)</td><td>06 (150)</td><td>07 (180)</td><td>08 (205)</td></tr> <tr><td>H</td><td>2 (51)</td><td>2 (51)</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td></tr> <tr><td>X MIN</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/4 (32)</td><td>1 1/2 (38)</td></tr> <tr><td>X MAX</td><td>2 1/4 (67)</td><td>2 1/4 (67)</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td></tr> </table>		B SQ	05 (125)	06 (150)	07 (180)	08 (205)	H	2 (51)	2 (51)	2 1/4 (67)	2 1/2 (64)	X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)	X MAX	2 1/4 (67)	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)	<p><b>FUNCTION:</b> Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Sediment Bucket -B            Vandal Proof Screws -U</p>  <table border="1" style="font-size: small;"> <tr><td>SUFFIX</td><td>L</td><td>M</td><td>N</td><td>P</td><td>R</td><td>T</td></tr> <tr><td>B x B'</td><td>4 1/2 (115)x8 (205)</td><td>4 (100)x12 (305)</td><td>5 (125)x9 (230)</td><td>5 (125)x13 (330)</td><td>6 (150)x10 (255)</td><td>5 (125)x17 (430)</td></tr> <tr><td>H</td><td>2 1/4 (67)</td><td>2 1/2 (64)</td><td>2 1/4 (67)</td><td>3 (76)</td><td>2 1/4 (67)</td><td>3 (76)</td></tr> <tr><td>X MIN</td><td>1 3/8 (35)</td><td>1 7/8 (48)</td><td>1 3/8 (35)</td><td>2 1/8 (54)</td><td>1 3/8 (35)</td><td>2 1/4 (67)</td></tr> <tr><td>X MAX</td><td>2 3/8 (60)</td><td>2 3/4 (70)</td><td>2 3/8 (60)</td><td>3 (76)</td><td>2 3/8 (60)</td><td>3 1/8 (79)</td></tr> </table>		SUFFIX	L	M	N	P	R	T	B x B'	4 1/2 (115)x8 (205)	4 (100)x12 (305)	5 (125)x9 (230)	5 (125)x13 (330)	6 (150)x10 (255)	5 (125)x17 (430)	H	2 1/4 (67)	2 1/2 (64)	2 1/4 (67)	3 (76)	2 1/4 (67)	3 (76)	X MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (67)	X MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)	<p><b>FUNCTION:</b> Shower room drain set at wall and floor junction. Vertical grate openings prevent drain stoppage should flat surface become covered.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Polished Bronze -PB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Vandal Proof Screws -U</p>  <table border="1" style="font-size: small;"> <tr><td>SUFFIX</td><td>B</td><td>C</td><td>D</td><td colspan="2">X</td></tr> <tr><td></td><td></td><td></td><td></td><td>MIN</td><td>MAX</td></tr> <tr><td>-V</td><td>3 1/2 (89)</td><td>3 1/2 (89)</td><td>4 1/2 (115)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> <tr><td>-W</td><td>6 3/4 (170)</td><td>6 3/4 (170)</td><td>6 1/2 (165)</td><td>1 5/8 (41)</td><td>2 5/8 (67)</td></tr> </table>		SUFFIX	B	C	D	X						MIN	MAX	-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)	-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)
B SQ	05 (125)	06 (150)	07 (180)	08 (205)																																																																																	
H	2 (51)	2 (51)	2 1/4 (67)	2 1/2 (64)																																																																																	
X MIN	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/2 (38)																																																																																	
X MAX	2 1/4 (67)	2 1/4 (67)	2 1/4 (67)	2 1/2 (64)																																																																																	
SUFFIX	L	M	N	P	R	T																																																																															
B x B'	4 1/2 (115)x8 (205)	4 (100)x12 (305)	5 (125)x9 (230)	5 (125)x13 (330)	6 (150)x10 (255)	5 (125)x17 (430)																																																																															
H	2 1/4 (67)	2 1/2 (64)	2 1/4 (67)	3 (76)	2 1/4 (67)	3 (76)																																																																															
X MIN	1 3/8 (35)	1 7/8 (48)	1 3/8 (35)	2 1/8 (54)	1 3/8 (35)	2 1/4 (67)																																																																															
X MAX	2 3/8 (60)	2 3/4 (70)	2 3/8 (60)	3 (76)	2 3/8 (60)	3 1/8 (79)																																																																															
SUFFIX	B	C	D	X																																																																																	
				MIN	MAX																																																																																
-V	3 1/2 (89)	3 1/2 (89)	4 1/2 (115)	1 5/8 (41)	2 5/8 (67)																																																																																
-W	6 3/4 (170)	6 3/4 (170)	6 1/2 (165)	1 5/8 (41)	2 5/8 (67)																																																																																
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE	<p><b>FUNCTION:</b> Used when a strainer head must be raised to accommodate deeper floor fill.</p> <p><b>REGULARLY FURNISHED:</b>            Duco Cast Iron -CI</p> <p><b>MATERIALS:</b>            Cast Bronze -CB            Galvanized Cast Iron -G</p>  <p><b>NOTE:</b> Extension can be stacked for increased maximum adjustment.</p>		<p><b>FUNCTION:</b> Used as overflow drain in decorative pools, fish ponds or similar areas. Dome prevents floating objects from entering drain line.</p> <p><b>MATERIALS:</b>            Chrome Plated -CP            Nickel Bronze -NB            Polished Bronze -PB</p> <p><b>VARIATIONS:</b>            Less Dome -LD            Standpipe Height other than 6" (150)            (Specify Height)</p>  <table border="1" style="font-size: small;"> <tr><td>SUFFIX</td><td>A</td><td colspan="2">X</td></tr> <tr><td></td><td>SIZE</td><td>MIN</td><td>MAX</td></tr> <tr><td>-Y</td><td>2 (51)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> <tr><td>-Z</td><td>3 (76)</td><td>3/4 (19)</td><td>2 1/8 (54)</td></tr> </table>		SUFFIX	A	X			SIZE	MIN	MAX	-Y	2 (51)	3/4 (19)	2 1/8 (54)	-Z	3 (76)	3/4 (19)	2 1/8 (54)	<p><b>FUNCTION:</b> Used in finished floors where light wheeled loads and or heavy foot traffic are anticipated.</p> <p><b>MATERIALS:</b>            Polished Bronze -PB            Rough Bronze -RB            Nickel Bronze -NB</p> <p><b>VARIATIONS:</b>            Flapper Type Backwater Valve (Specify Suffix -69V)            Sediment Bucket -B            Vandal Proof Screws -U</p>  <p>eg: A06NB-69</p>																																																																
SUFFIX	A	X																																																																																			
	SIZE	MIN	MAX																																																																																		
-Y	2 (51)	3/4 (19)	2 1/8 (54)																																																																																		
-Z	3 (76)	3/4 (19)	2 1/8 (54)																																																																																		
FIGURE NUMBER	<p><b>SUFFIX -X</b></p>  <p>Fig. 3580</p>  <p>Fig. 3581</p>  <p>Fig. 3590</p>  <p>Fig. 3591</p>		<p><b>SUFFIX -Y-Z</b></p> <p>Specify Type, Size &amp; Finish eg: YCP, ZCP</p>		<p><b>SUFFIX -69</b></p> <p>Specify Type, Size &amp; Finish eg: A06NB-69</p>																																																																																
REV.	DATE	DESCRIPTION		BY	CKD. BY	FIGURE NUMBER																																																																															
K	10-20-17	Rev. Materials Suffix -H, -V-W		TBW	CL	<b>FIGURE NUMBER</b> <b>2010 SERIES OPTIONAL STRAINER HEADS</b> <b>2 of 2</b>																																																																															
J	1-17-12	Rev. Variations of Suffix -J		TBW	AM																																																																																
H	8-24-99	Revised		TBW	BS																																																																																
G	6-11-99	Revised Tables		CMD	BS																																																																																
F	1-22-99	T Strainer was S Strainer		TBW	BS																																																																																

NOTE: Dimensions shown in parentheses are in millimeters.