

G  
 DRAWING NUMBER  
**S8560 (-E)**  
 SIZE  
**A**  
 SCALE:  
**NONE**  
 DATE:  
**11-14-89**  
 APPROVED BY:  
**CR**  
 CHECKED BY:  
**TD**  
 DRAWN BY:  
**EMB**  
**8560 (-E)**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE


**SMITH® JAY R. SMITH MFG. CO.®**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



LOCATION

# OIL INTERCEPTORS

## ALL STEEL OIL INTERCEPTORS

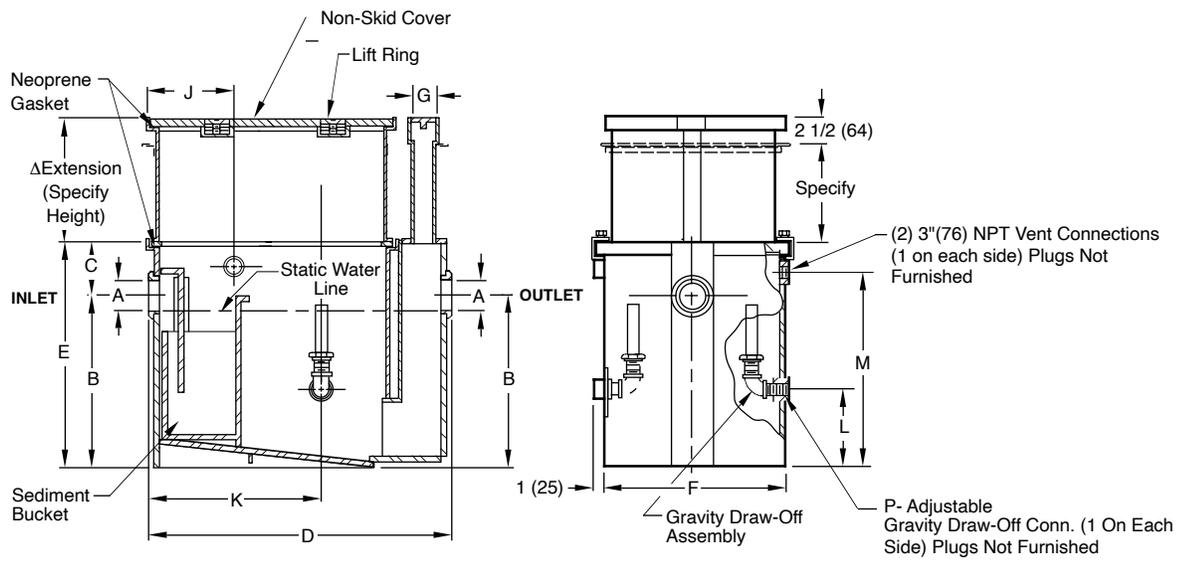

**NOTE:** Interceptor shall be vented on outlet side per local code requirements.

PCN/ Fig. No.	GPM Flow Rate	Inlet and Outlet Size	Dimensions						C.O. Plug Size	Dimensions					Draw- Off
			Roughing Dimensions			Body				G	J	K	L	M	
			A*	B	C	D	Height	Width							
8560 (-E)	75	04(100)	21 1/2(545)	15 1/2(395)	50 3/4(1290)	37(940)	30 1/2(775)	3(76)	21(535)	28 1/4(720)	13(330)	32 3/4(830)	2(51)		
8565 (-E)	100	04(100)	27(685)	16 1/2(420)	54 3/4(1390)	43 1/2(1105)	33 1/2(850)	3(76)	23(585)	30 1/4(770)	18 1/2(470)	39 1/4(995)	2(51)		
8570 (-E)	150	05(125)	33(840)	17 1/2(445)	60 3/4(1543)	50 1/2(1283)	38 1/2(980)	4(100)	25 1/2(650)	34 1/4(870)	23 1/2(595)	46 1/4(1175)	2 1/2(64)		
8575 (-E)	200	05(125)	37(940)	17 1/2(445)	67 3/4(1720)	54 1/2(1385)	43 1/2(1105)	4(100)	29(735)	38 1/4(970)	27 1/2(700)	50 1/4(1275)	2 1/2(64)		
8580 (-E)	250	05(125)	40(1015)	18(455)	73 3/4(1875)	58(1473)	47 1/2(1205)	4(100)	32(815)	42 1/4(1075)	30 1/2(775)	53 3/4(1365)	2 1/2(64)		
8585 (-E)	350	05(125)	43 1/2(1105)	18(455)	85 3/4(2178)	61 1/2(1562)	54 1/2(1385)	4(100)	38(965)	50 1/4(1275)	34(865)	57 1/4(1455)	2 1/2(64)		
8590 (-E)	500	06(150)	48(1220)	18(455)	103 1/4(2623)	66(1615)	64 1/2(1640)	5(125)	46(1170)	62 1/4(1580)	38(965)	61 3/4(1570)	2 1/2(64)		

\*Available with larger inlet and outlet when specified.  
 Δ Extension Regularly Furnished integrally.

**REGULARLY FURNISHED:**  
 Steel Interceptor and Extension with Gray Duco Coating Inside and Outside and Flow Control Fitting.

- VARIATIONS:**
- Anchor Flange -F
  - Flange and Flashing Clamp -F-C
  - NO-HUB Adaptor (4) Req'd (Specify Fig. 2646Y)
  - Traffic Rated Cover-H20

- OPTIONAL MATERIALS:**
- Acid Resistant Coating Inside - ARI
  - Acid Resistant Coating Outside - ARO
  - Acid Resistant Coating Inside and Outside - ARI0
  - Aluminum Cover -AC

**NOTE:** Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>8560 (-E)</b>
	7-27-23 12-3-13 5-5-06 2-3-05	Removed Function Revised Drawing Revised Drawing & Note Revised Variations	HS TBW RN RN	CL CL CL CL			