

ADJUSTABLE RECIRCULATING FITTINGS

DRAWING NUMBER **S6105**

SIZE **A**

SCALE: **NONE**

DATE: **3-25-83**

APPROVED BY: **SJM**

CHECKED BY: **DT**

DRAWN BY: **BS**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA




Fig 6105T
with manual closure cover




Fig. 6115T
less manual closure cover

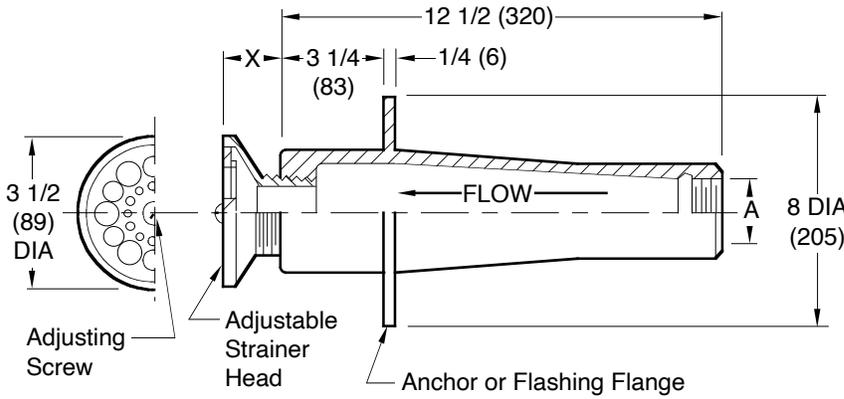


Fig. 6125T
with manual closure cover

A (Pipe Size) = 0150(40), 02(50) or 03(75)

THREADED INLET ONLY

Fig No	MIN X	MAX	Free Area
6105T	1(25)	2(51)	4.5 SQ IN(29) SQ CM
6115T	1(25)	2(51)	5.6 SQ IN(36) SQ CM
6125T	1/2(13)	1 1/2(38)	1.5 SQ IN(10) SQ CM

REGULARLY FURNISHED:
 Duco Cast Iron Body with Secured Chrome Plated Bronze Face.

VARIATIONS:

- Flashing Clamp -C
- Vandal Proof Screws -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Nickel Bronze Face -NB
- Polished Bronze Face -PB

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

F E D C	7-20-23 1/5/09 12/17/08 12/08/08	Removed Function Revised Function & Heading Revised Chart Revised Variations	HS RN RN RN	CL CL CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 6105,6115,6125
REV.	DATE	DESCRIPTION	BY	CKD. BY			