



GENERAL PURPOSE FLOOR DRAIN

6"(150) ROUND TOP

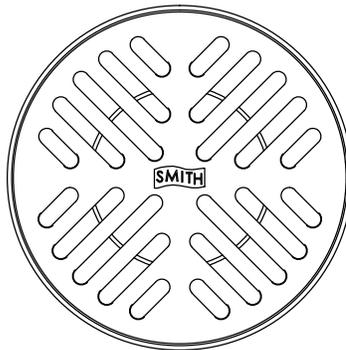

FREE AREA
8.45 SQ IN
(54.5 SQ CM)

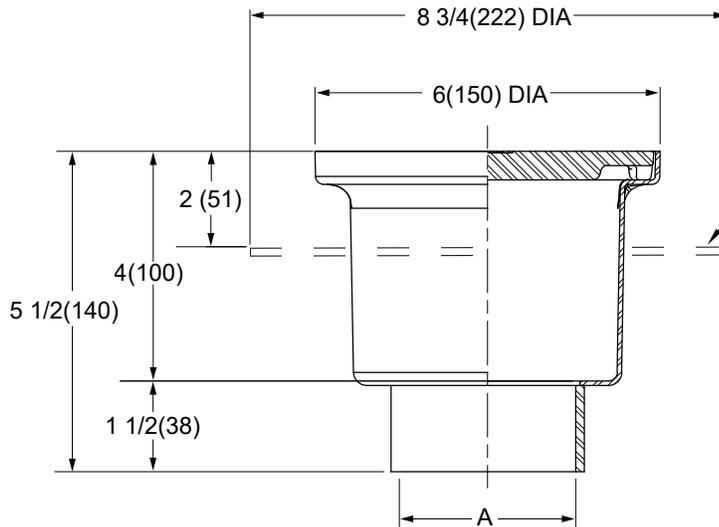

Anchor Flange
(When Specified -F)

USDA ACCEPTED



ASME A112.6.3 &
CSA B79
Certified Extra Heavy
Duty Load Rating



C
File No. 3663

A (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 9610BW **BUTTWELD OUTLET** (Schedule 40 Regularly Furnished)
- Fig. 9610T **THREADED OUTLET**
- Fig. 9610Y **NO-HUB OUTLET**

REGULARLY FURNISHED:
14 Gauge Type 304 Stainless Steel Body and Loose Set Heel Proof Slotted Grate with No. 4 Finish.

VARIATIONS:

- Anchor Flange -F
- Flange & Flashing Clamp -FC
- Sediment Bucket -B
- Vandal Proof Grate -U
- 1/2"(13) Trap Primer Connection -P050
- USDA Compliant

OPTIONAL MATERIALS:

- Type 316 Stainless Steel -316

SUBJECT TO MANUFACTURING TOLERANCE AND CHANGE WITHOUT NOTICE.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S9610**
SIZE **A**
SCALE: **NONE**
DATE: **7-17-14**
APPROVED BY: **JM**
CHECKED BY: **CL**
DRAWN BY: **TBW**
9610
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | | | |
|------|----------|--------------------------------|-----|---------|---------------|-------------------|--|
| REV. | DATE | DESCRIPTION | BY | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER <h1 style="margin: 0;">9610</h1> |
| F | 4-17-24 | Added Anchor Flange | HS | CL | | | |
| E | 12-13-21 | Added ASME and CSA numbers | KK | CL | | | |
| D | 6-9-2020 | Revised Regularly Furnished | MW | CL | | | |
| C | 5-16-18 | Revised Variations, Added Note | TBW | CL | | | |