





Option -MA

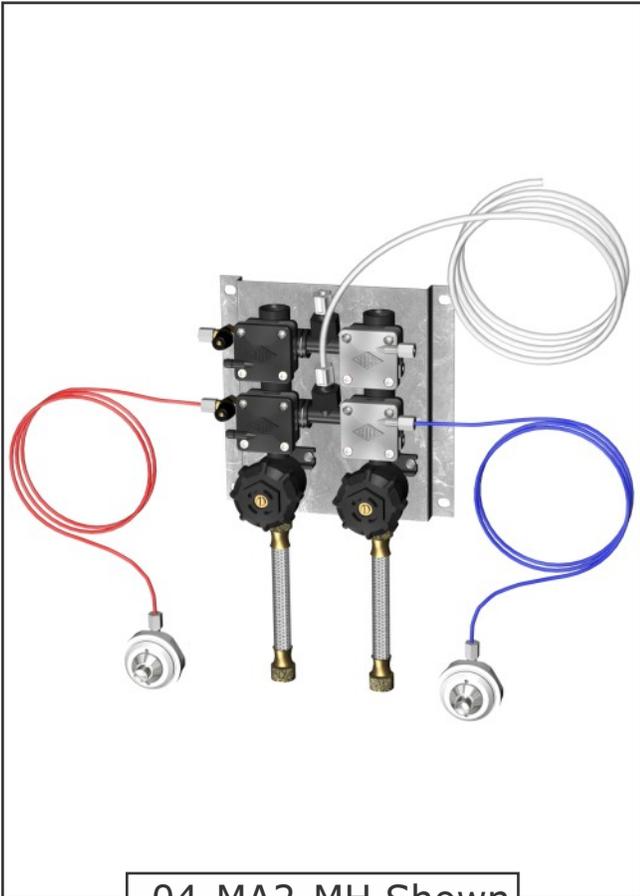

-04-MA2-MH Shown

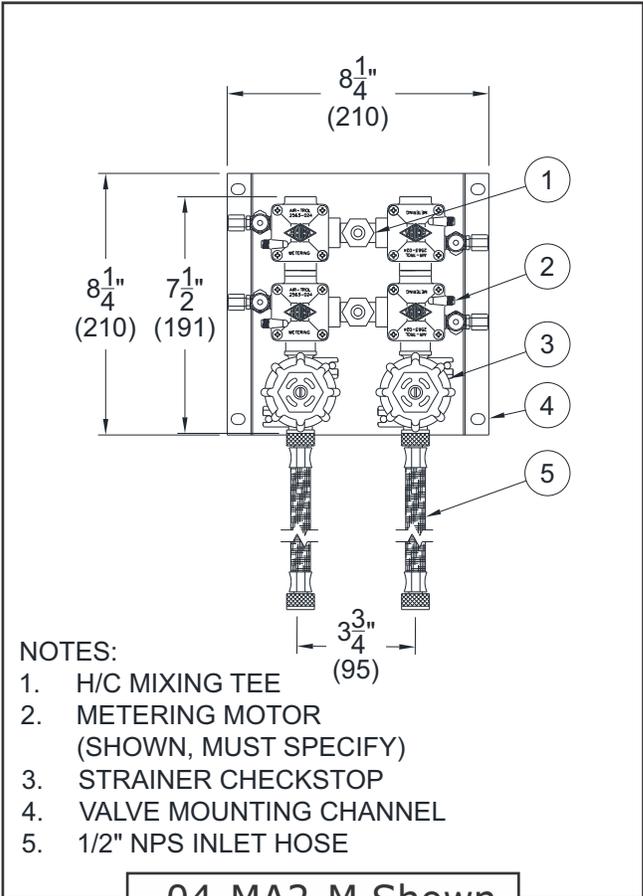

- NOTES:
1. H/C MIXING TEE
 2. METERING MOTOR (SHOWN, MUST SPECIFY)
 3. STRAINER CHECKSTOP
 4. VALVE MOUNTING CHANNEL
 5. 1/2" NPS INLET HOSE

-04-MA2-M Shown

Manifold Air-Control Valve -

Air-Control Valve assemblies used with Lavatories and Showers, may be provided with a manifolded design to serve from two to four fixtures using a single point of connection for water supplies. The manifolded valve assembly is to be remotely located up to maximum 10 feet away from the designated fixture Pushbuttons. This gives the design ideal application for angled chase applications with lower and upper cell floors.

Manifolded valve assemblies may be specified as: -MA2 for Two Fixtures; -MA3 for Three Fixtures, and -MA4 for Four Fixtures. Valves are available with -03 Single Temperature manifolds or -04 Hot & Cold valve manifolds and may be specified with other Air-Control Valve options for Metering, Metering on Hot side only as well as Pushbutton and Bubbler options.

Note: The -MA Manifold is not intended for use with optional Flush Valve designs.

Please visit www.acorneng.com for most current specifications.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

