

## Post Hydrant

### MODEL M-E123

3/4" FREEZE RESISTANT,  
ECONO POST HYDRANT  
WITH LEVER HANDLE

#### STANDARD FEATURES

Model M-E123 delivers year-round service outside or in unheated buildings. To provide freeze resistant functionality, the control valve is located below the frost line. Turning the lever handle raises or lowers the internal supply-line assembly, controlling the valve. Constructed of heavy lead-free brass, premium-quality gray iron and steel, the M-E123 is designed for trouble-free reliability and easy maintenance.

#### SUGGESTED SPECIFICATIONS

Hydrant shall be Murdock model M-E123. Unit shall be capable of year-round use in freezing weather.

Unit shall extend below grade level so that centerline of supply inlet is positioned at or below frost line. Inlet shall have 3/4" NPT female connection.

Water shall be gravity-evacuated from inner supply column when valve is shut off.

Valve shall be lever handle operated. Handle shall be fabricated of one-piece iron casting finished with a heavy grade of oil-based green enamel. Stock, top, and base shall be fabricated of heavy, one-piece iron castings finished with a heavy grade of oil-based green enamel.

Inner supply assembly shall incorporate solid-brass castings. All solid brass castings shall conform to ASTM standards B61 and B62. Lead-free castings are used in all waterways.

Outer casing shall be black iron pipe, finished with a heavy grade of oil-based green enamel.

Hydrant shall consist of internal supply line and a surrounding outer casing pipe for protection of waterway.

Nozzle shall be solid brass casting, threaded for 3/4" NPS hose connection.

Refer to [LINK](#) for Hydrant Discharge Flow Rates.



**Standard Model:** M-E123

#### DEPTH OF BURY (additional costs may be incurred)

- |   |   |
|---|---|
| <input type="checkbox"/> 2 ft. (61 cm)    | <input type="checkbox"/> 5 ft. (152.4 cm) |
| <input type="checkbox"/> 3 ft. (91.4 cm)  | <input type="checkbox"/> 6 ft. (182.9 cm) |
| <input type="checkbox"/> 4 ft. (121.9 cm) | <input type="checkbox"/> Other _____      |

#### OPTIONS (additional costs may be incurred)

- |                                |   |
|--------------------------------|---|
| <input type="checkbox"/> - BFH | Double ball check valve and vacuum breaker* |
| <input type="checkbox"/> - VB  | Vacuum breaker                              |
| <input type="checkbox"/> - LC1 | Locking cover, less padlock*                |
| <input type="checkbox"/> - R01 | Shut off valve with plate*                  |
| <input type="checkbox"/>       | Plain end spout                             |
| <input type="checkbox"/>       | Sewer drain connection                      |

\* See separate option sheets

Certified to the following standards:



Federal Public Law 111-380 (No Lead)




Recyclable Product

**⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

**Post Hydrant**

**MODEL M-E123**

**3/4" FREEZE RESISTANT, ECONO POST HYDRANT WITH LEVER HANDLE**

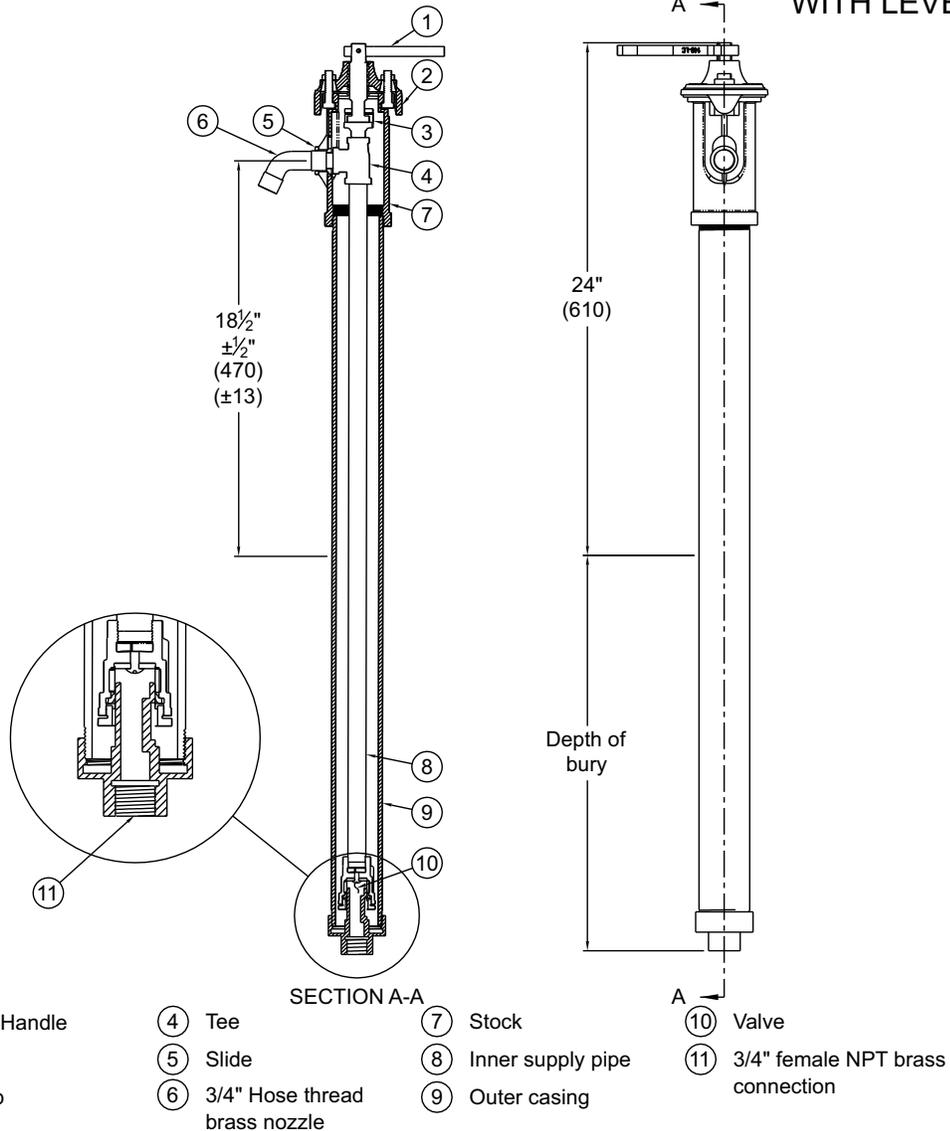

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

*All dimensions are subject to manufactures tolerance of plus or minus 1/2" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*