

## GY Series

### MODEL GYV34

BARRIER-FREE PEDESTAL MOUNTED LARGE CAPACITY BOTTLE FILLER DESIGN WITH BI-LEVEL DRINKING FOUNTAINS

#### STANDARD FEATURES

- Adult ADA compliant
- Pushbutton and Hands-Free Sensor Operated Bottle Filler
- Auto-Purge Sensor Function to Assure Fresh Water Supply
- Oversize Bottle Filler Opening with Laminar Flow Spout
- Accommodates Extra Large Bottles Up to 7" Dia x 13" Tall
- Resistant to Sunlight, Heat, Moisture and Wear
- 18 Gauge, Type 304 Stainless Steel Drinking Fountain Bowls
- Heavy Gauge, Type 304 Stainless Steel Construction with Corrosion and Scratch Resistant Finish
- Stainless Steel, Anti-Rotation Non-Squirt Bubbler
- 100-Mesh Inlet Strainer
- Access Cover, Heavy Duty Stainless Steel, Vandal Resistant

#### SUGGESTED SPECIFICATIONS

Barrier-free drinking fountains with bottle filler shall be Murdock model GYV34. Construction shall be heavy gauge, all stainless steel with 18 gauge stainless steel fountain bowls. Pedestal base shall have four mounting holes. Access covers shall be secured with vandal-resistant stainless steel screws. Bottle filler shall be activated by a 9-volt sensor or a pushbutton as standard and provide 1.5 GPM (5.7 LPM) flow. Auto-Purge Sensor function shall activate Bottle Filler for 10 second duration 24 hours after last activation as standard and allow for purge cycle adjustment. Unit shall contain a 100-mesh inlet strainer, 6-AA battery pack and laminar flow spout. Self-closing pushbutton, needing less than 5 pounds of force, shall activate internally mounted valves with adjustable stream regulators. Bubblers shall be stainless steel with non-squirt feature and operate on water pressure range of 20-105 PSIG. Fountain is certified to ANSI A117.1. Unit shall be certified to Public Law 111-380 (NO-LEAD) and NSF/ANSI/CAN 61. Fixture meets ADA requirements when mounted appropriately.

#### Product Warranty

#### 3000 Gallon PFAS Filter Certifications

Option Notes:

<sup>1</sup> See separate option sheet

<sup>2</sup> This option is not available freeze-resistant.

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



Recyclable Product



Water Conserving Product

⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



Model GYV35 Shown

#### MODEL:

(Must Specify)

- GYV34 Satin Stainless Finish (Shown)
- GYV35 Green Powder-Coated
- GYV36 Red Powder-Coated
- GYV37 Blue Powder-Coated

Custom color finishes available upon request

#### OPTIONS

(additional costs may be incurred)

- CH30 Child Height, 30" Bubbler Height
- CV Cartridge Valve On Fountain<sup>1 2</sup>
- FRU3 Freeze Resistant, 3 Valves<sup>1</sup> (Less Sensor & Filter<sup>1</sup> N/A)
- FRU4 Freeze Resistant, 4 Valves<sup>1</sup> (Less Sensor & Filter<sup>1</sup> N/A)
- HB1 Hose Bibb, Compression, w/ Hose Threaded Outlet/VB<sup>1 2</sup>
- HB3 Hose Bibb, Loose Key, Vandal Resistant, Locked Door w/ Hose Threaded Outlet/VB<sup>1 2</sup>
- IGM In-Ground Mounting Adapter
- MO Bottle Filler Operated By Pushbutton Only (Standard w/ Freeze-resistant Valves)
- NP3 Non-Pollutable, Freeze Resistant, 3 Valves (Less Sensor & Filter<sup>1</sup> N/A)
- NP4 Non-Pollutable, Freeze Resistant, 4 Valves (Less Sensor & Filter<sup>1</sup> N/A)
- PF Pet Fountain Receptor<sup>1</sup>
- SLPT 10° Bottle Filler Sloped Top

#### ACCESSORIES



(additional costs may be incurred)

- AP Auto-Purge Sensor Function Controller
- IAP In-Ground Anchor Plate
- LSR Bowl With Leaf And Debris Strainer<sup>1</sup>
- WF3000 3000-Gallon PFAS Water Filter<sup>1</sup> NSF/ANSI, PFAS, Lead, Bacteria, Chlorine, Microplastics (N/A with -FRU<sup>1</sup> and NP<sup>1</sup> Freeze Resistant Valve)

**IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRU" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.**




**GY Series**

**MODEL GYV34**  
BARRIER-FREE PEDESTAL MOUNTED LARGE CAPACITY BOTTLE FILLER DESIGN WITH BI-LEVEL DRINKING FOUNTAINS

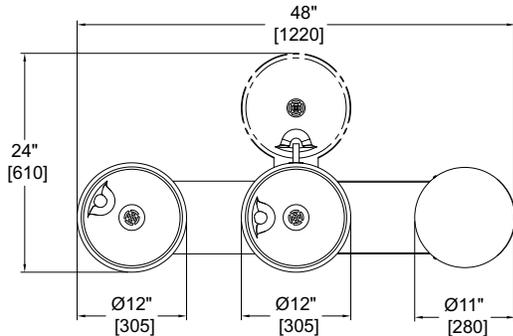

**OPTIONAL -PF PET FOUNTAIN DETAIL**

**\*NOTE: For -CH30 Option dimension becomes 24" [610].**

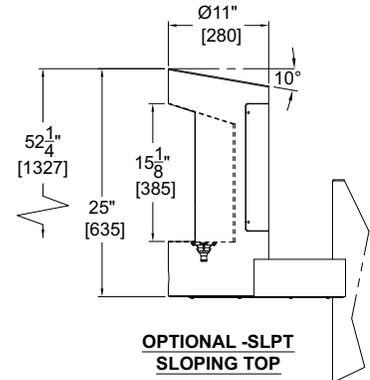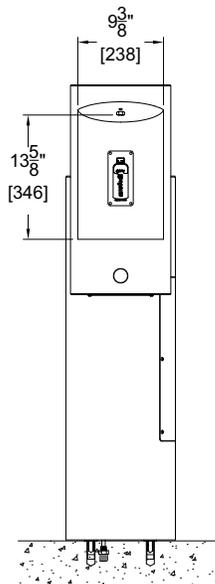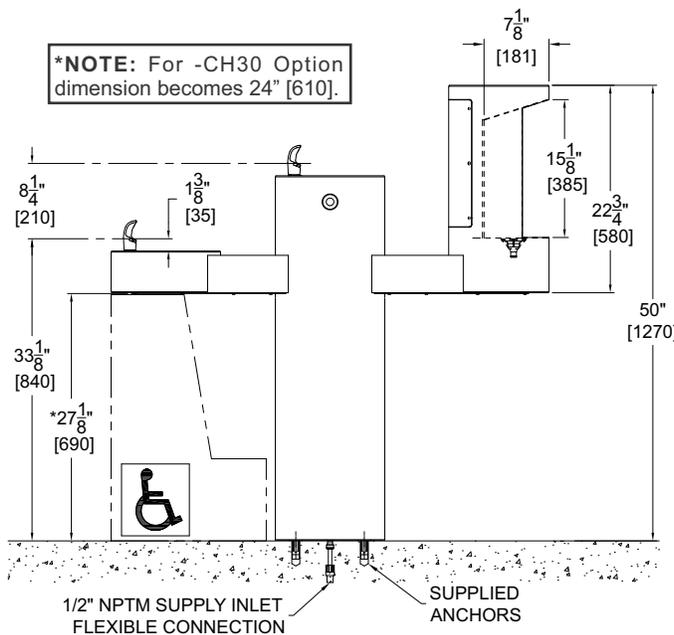

**OPTIONAL -SLPT SLOPING TOP**

**\* Valve specifications:  
Minimum/Maximum Pressure  
30 to 100 PSI.**

**GENERAL NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. STOP VALVE NOT PROVIDED
3. MODELS MANUFACTURED FROM JANUARY 2025 TO PRESENT INCLUDE LARGER BOTTLE FILL AREA.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Signature (Approval for Manufacturing) \_\_\_\_\_ Date \_\_\_\_\_

*All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock<sup>®</sup> assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock<sup>®</sup> Mfg., Member of Morris Group International<sup>®</sup>. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.*