


# CSH-WSB

## Ligature Resistant WaterSense Flanged Showerhead

Ligature and Vandal Resistant Flanged Showerhead with a conical shape. Includes a Removable Vandal Resistant Stainless Steel Non-Aerated Multi-Stream Spray Nozzle fitted with a 1.5 GPM (5.7 LPM) Flow Regulator. Conical Body and Spray Insert are machined from solid type 303 stainless steel and polished to a mirror finish. The conical shape of the Showerhead provides a 30° degree spray angle and prevents it from being used as a ligature point. This Showerhead is IAPMO cUPC certified per ASME A112.18.1 / CSA B125.1 standard for USA & Canada and is EPA certified under WaterSense requirements.

The CSH-WSB Flanged Showerhead is intended for Wall Mounting and includes a 1/2" NPT x O-Ring Adapter, Inlet Connection. Also included is an 8 gage Galvanized Steel Anchor Plate to mount to the finished wall in preparation for mounting the Flanged Showerhead assembly.

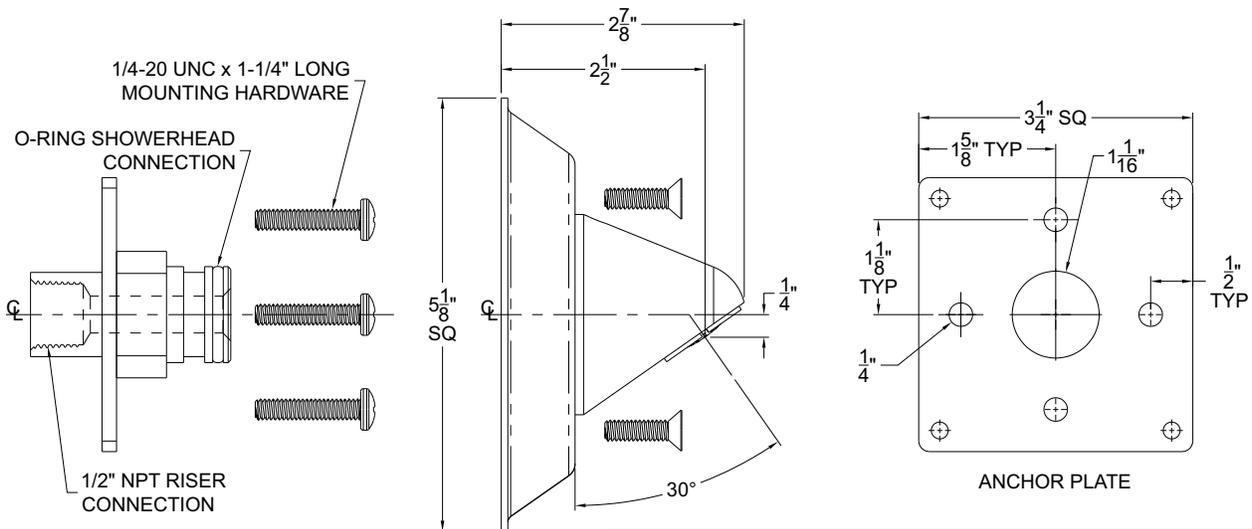

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**Important:** Installation instructions and current rough-in are furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of plus or minus 1/4" and change without notice. Acorn assumes no responsibility for use of void or superseded data. © Copyright 2009 Acorn Engineering Company

<p style="text-align: center;">Selection Summary</p> <p>Model No. &amp; Option _____</p> <p>Quantity _____</p>	<p style="text-align: center;">Approved for Manufacturing</p> <p>Company _____ Title _____</p> <p>Signature _____ Date _____</p>
--	--

**CSH-WSB**

Rev: 04/19/24