


ADJUSTABLE FIXTURE SUPPORTS FOR SIPHON JET WATER CLOSETS

NARROW WALL NO-HUB VERTICAL FITTING WITH SIDE INLET

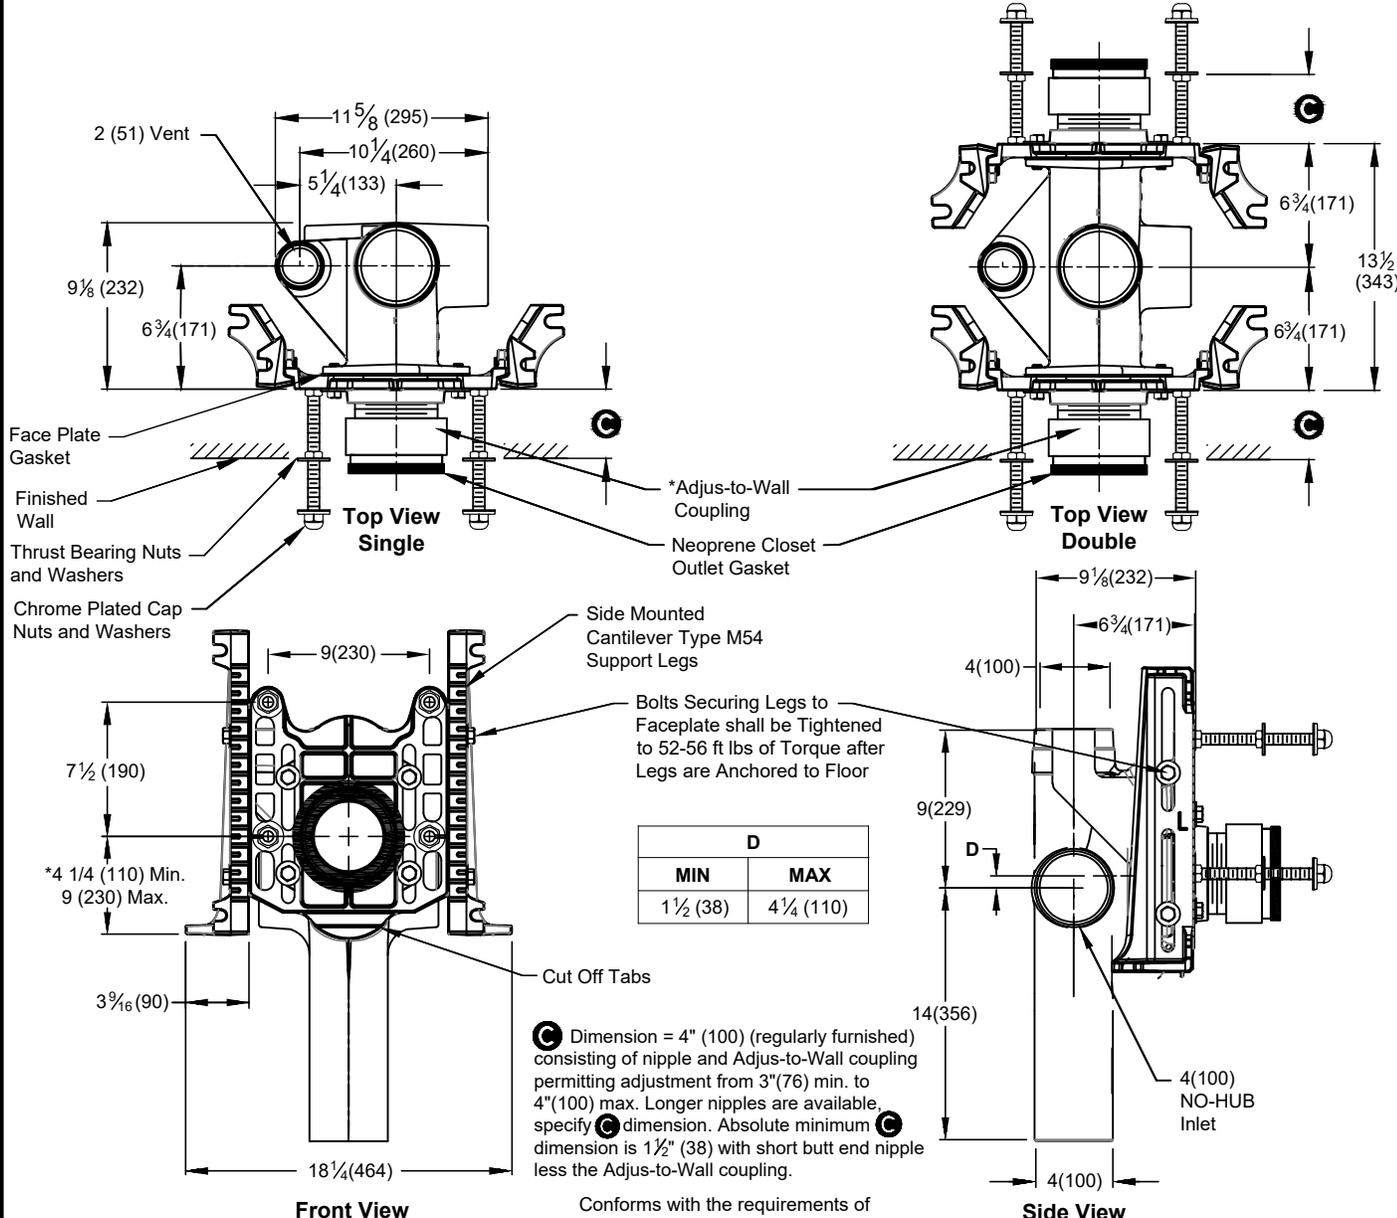

NOTES:

- Support must be securely anchored to the structural slab with one 1/2" (13) anchor per support leg, each able to withstand a pull-out force of 1750 lbs (974 kg). Pull-out force is a calculated value, no safety factor has been applied.
- The side mounted Cantilever Type M54 support legs do not require a rear anchor on the fitting.
- Cast iron components are Duco coated.
- 9" (230) core drilled hole is required for rough-in 4 1/4 (110) thru 6 1/2 (165).
- Dimensions shown in parentheses are in millimeters.

Conforms with the requirements of ASME A112.6.1M up to a 500lbs (227KG) static load rating, without a rear anchor.

- Fig. 0240LY(-M54NW) . . . NO-HUB Left Hand Inlet
- Fig. 0240RY(-M54NW) . . . NO-HUB Right Hand Inlet
- Fig. 0240DY(-M54NW) . . . NO-HUB Double

*ABS (Regularly Furnished)

DRAWING NUMBER: S0240Y-M54NW
 SIZE: A
 SCALE: NONE
 DATE: 6-14-24
 APPROVED BY: DP
 CHECKED BY: CL
 DRAWN BY: JJT
 FIGURE NUMBER: 0240Y (-M54NW)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	2-13-25	Added Double Option Revised Notes	HS	CL			0240Y (-M54NW)
A	6-27-24		HS	CL			