


# ROOF DRAIN AND OVERFLOW DRAIN

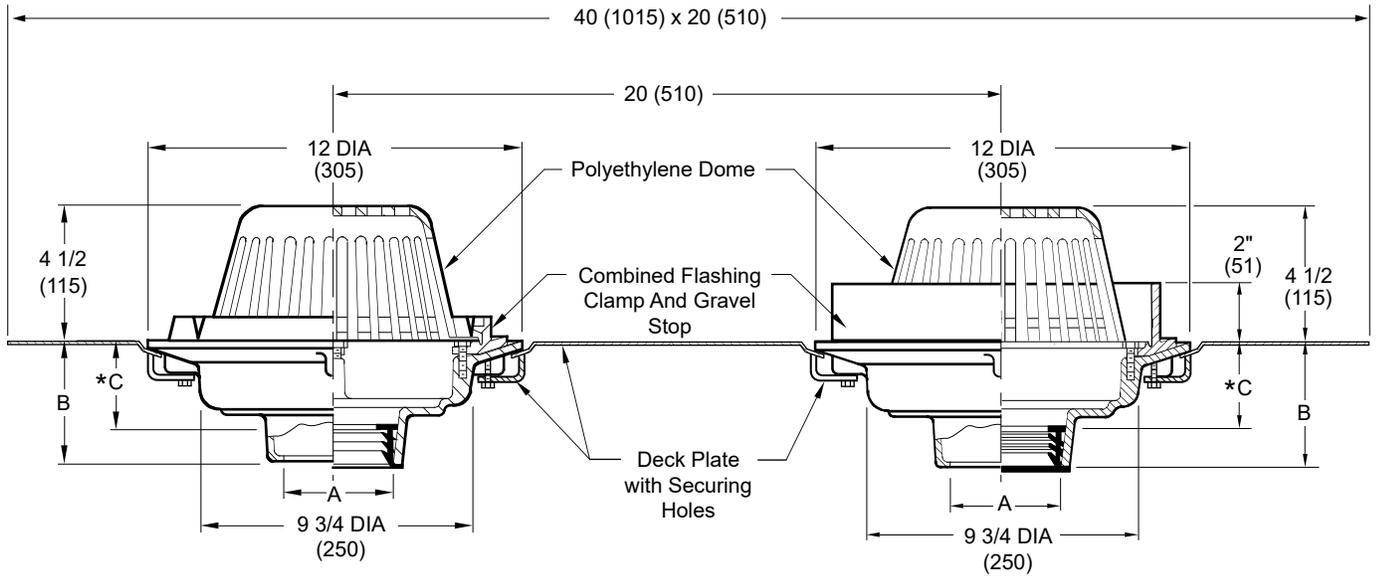

\* NOTE: This Dimension to Internal Stop of Speedi-Set® Gasket.

- 1850C.....CAULK OUTLET
- 1850T.....THREADED OUTLET
- 1850Y..... NO-HUB OUTLET

A SIZE	B		*C	FREE AREA SQ IN (SQ CM)
	CAULK, NO-HUB, & SPEEDI-SET®	THREADED		
02(50),03(75), 04(100) 05(125), 06(150)	6 (150)	4 3/4 (120)	4 3/4 (120)	71.5 (461)

**REGULARLY FURNISHED:**

Duco Cast Iron Body, Double Deck Plate with Securing Holes, Combined Flashing Clamp and Gravel Stop for Roof Drain and External Water Dam for Overflow Drain, both with Polyethylene Dome.

**VARIATIONS:**

- Expansion Joint (Specify Fig.1710)
- Extension (Specify Height) -E
- L Speedi-Set® Service Weight
- LXH Speedi-Set® Extra Heavy
- Secondary Flashing Clamp -C2
- Vandal Proof Dome -U
- 4"(102) Tall S.S. Perforated Gravel Guard -GG04

**OPTIONAL MATERIALS:**

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Dome -CIDG
- Galvanized Cast Iron Body & Collar -G
- Rough Bronze Dome -RBD
- Stainless Steel Mesh Over Dome -SSM

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER s1850  
 SCALE: NONE  
 DATE: 4-26-11  
 APPROVED BY: CL  
 CHECKED BY: CL  
 DRAWN BY: TBW  
 1850  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

D	7-12-24	Rev. Fig. Opts., Var., Opt. Mat.	HS	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
C	3-8-23	Added ® to "Speedi-Set"	KK	CL			
B	7-30-19	Removed NOTE	MW	CL			
A	12-1-15	Added Flow Rate Note	TBW	BW			<b>1850</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			