


FLOOR DRAINS

WIDE FLANGE BODIES WITH "SAFE-SET" BUCKET


Load Rating: Light Duty having a Safe Live (Static) Load less than 2,000 lbs. (900 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
9.25 SQ IN
(60) SQ CM

Free Area
25.25 SQ IN
(163) SQ CM

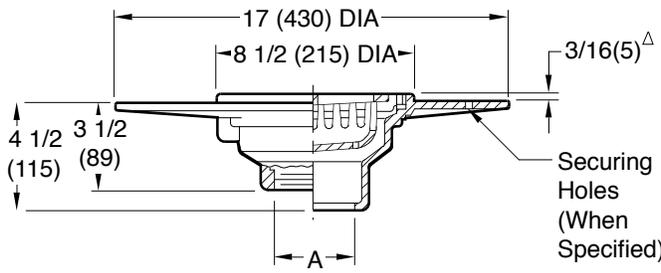

A (Pipe Size) = 02(50), 03(80) or 04(100)

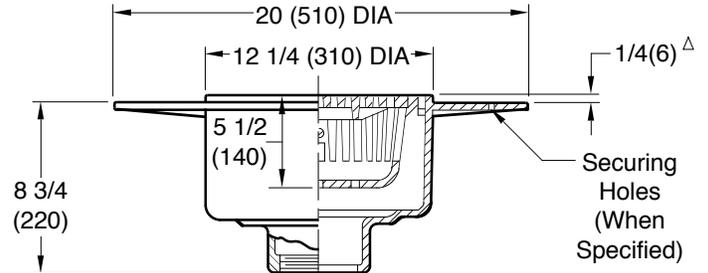

A (Pipe Size) = 02(50), 03(80), 04(100), 05(125) or 06(150)

Fig. DX2565C . . . CAULK OUTLET
 Fig. DX2565T . . . THREADED OUTLET

Fig. DX2566C . . . CAULK OUTLET
 Fig. DX2566T . . . THREADED OUTLET

Δadd 3/16"(5) when bronze top is specified.

REGULARLY FURNISHED:
Duco Cast Iron 4"(100) Wide Flange Body with Bucket and ADA Grate.

- VARIATIONS:**
- Membrane Clamp (Specify Fig. DX2565R or DX 2566R)
 - NO-HUB Adaptor (Specify Fig. 2646Y)
 - Securing Holes -SH
 - Vandal Proof Grate -U
 - Underdeck Clamp -UDC
 - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: **DX2565**
 SIZE: **A**
 SCALE: **NONE**
 DATE: **5-17-85**
 APPROVED BY: **TD**
 CHECKED BY: **TD**
 DRAWN BY: **PJ**
DX2565, DX2566
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							DX2565, DX2566