


DRAWING NUMBER: **s2698-MA**  
 SIZE: **A**  
 SCALE: **NONE**  
 DATE: **3-9-07**  
 APPROVED BY: **CL**  
 CHECKED BY: **CL**  
 DRAWN BY: **RN**  
**2698-MA**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

# PRIME-EZE® WATER SAVER TRAP PRIMER

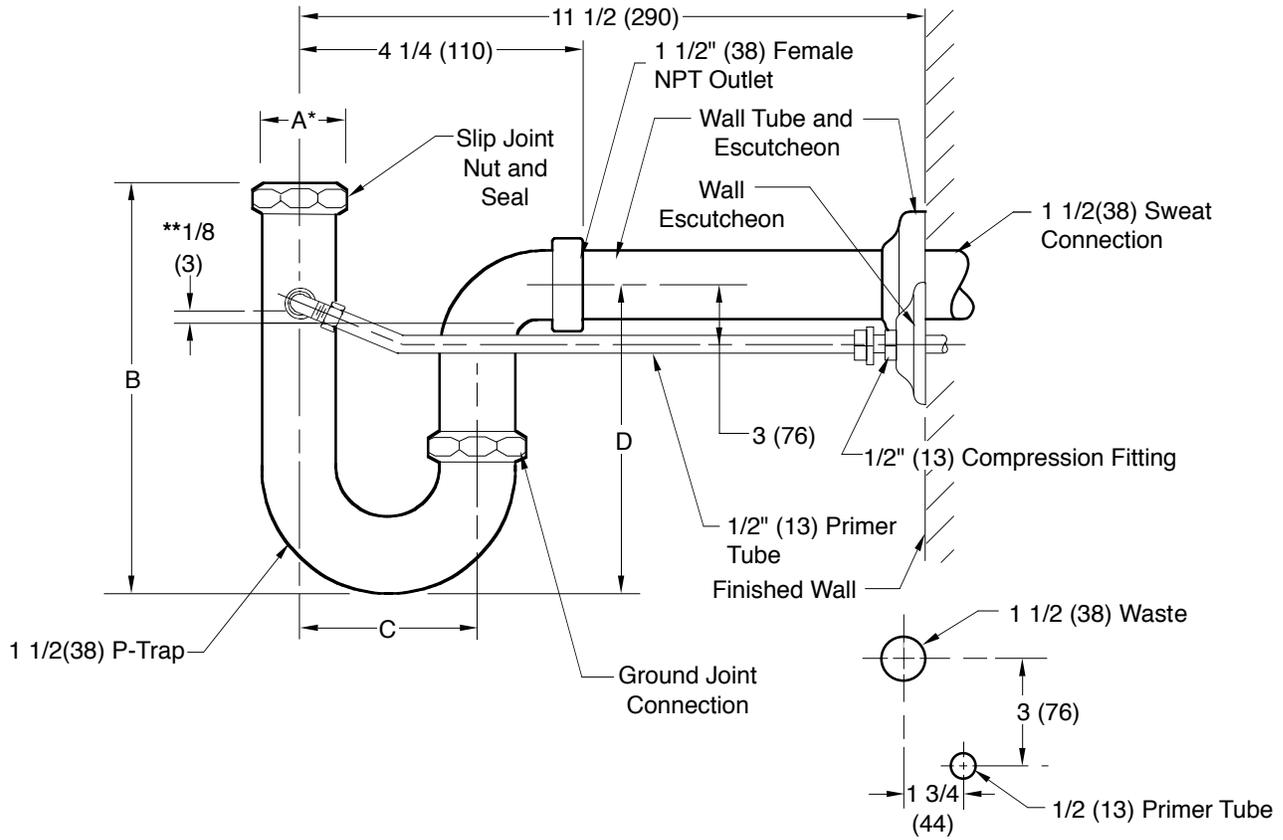

\*1 1/4 (32) and 1 1/2 (38) Slip Joint Nuts are Provided to Accommodate the Appropriate Fixture Tailpiece. Ground Joint Elbow is Threaded 1 1/2 (38) N.P.T.

**\*\*NOTE:** Invert of connection located 1/8" (3) above static water level enabling "overflow" into primer tube when temporary head of water is created.

**RECOMMENDED ROUGH-IN**

A (INLET SIZE)	B	C	D
0125 (32) or 0150 (38)	6 (150)	2 7/8 (73)	5 (125)

**REGULARLY FURNISHED:**

Satin Chrome Plated Cast Bronze P-trap with Ground Joint Connection and Escutcheons, 1/2" (13) Primer Tube with Compression Fitting Connection at Wall.

**OPTIONAL MATERIALS:**

Polished Chrome Plated Cast Bronze P-Trap -CP

**NOTE:** Dimensions shown in parentheses are in millimeters.

U.S. PATENT  
4,218,786



STD. 1044

CANADIAN PATENT  
1,139,184

REV.	DATE	DESCRIPTION	BY	CKD. BY
A	12-1-20	Added Trademark, Removed Function	TBW	JT

WEIGHT POUNDS	VOLUME CUBIC FEET

**FIGURE NUMBER**  
**2698-MA**